


## Welcome to Aquarea air to water heat pumps

From 3 kW to 30 kW, Panasonic's Aquarea air to water heat pumps range is one of the widest on the market, offering solutions for most properties, whatever their size and heating and cooling demands. Suitable for new build and refurbishment projects, the solutions are cost-effective with minimised environmental impact.



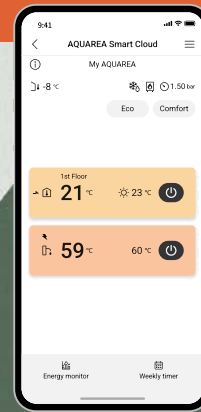

# AQUAREA

Highlighted features	→ 24
Aquarea – comprehensive heating solution by Panasonic	→ 26
Discover the Aquarea Heat Pump range	→ 28
Comfort heating and peace of mind with Aquarea solution	→ 30
At the forefront of heating innovation: Panasonic expands Aquarea series with natural refrigerant R290	→ 32
Aquarea T-CAP M Series, the latest generation of Aquarea Heat Pumps with R290	→ 34
Big Aquarea T-CAP M Series	→ 37
Big Aquarea for centralised heating and DHW installations	→ 38
Aquarea Loop	→ 40
Aquarea All in One Hydraulic M Series	→ 42
Aquarea K Series	→ 44
Aquarea EcoFlex	→ 46
Smart Solutions for Aquarea systems	→ 50
Aquarea Home App	→ 51
Panasonic Comfort Cloud App	→ 52
Aquarea Service Cloud	→ 53
Aquarea Heat Pumps + tado°	→ 54
Control for Aquarea Heat Pumps	→ 56
Connectivity	→ 57
Cascade manager	→ 58
P-Smart Edge for Aquarea Cascade Edge	→ 60
Nearly Zero Energy Buildings (nZEB)	→ 62
Aquarea and PV integration	→ 63
Aquarea design tools to make your life easier	→ 64
Validating efficiency and performance of Aquarea Heat Pumps	→ 75
Aquarea Hydraulic	→ 66
Aquarea Split	→ 68
Aquarea DHW Heat Pump	→ 68

## Aquarea High Performance

Hydraulic L Series · R290	→ 70
Hydraulic M Series · R290	→ 72
Mono-bloc J Series · R32	→ 74
All in One 185 L K Series · R32	→ 82
All in One 185 L K Series with Electrical Anode · R32	→ 83
All in One 260 L K Series / with Electrical Anode · R32	→ 84
All in One 185 L K Series 2 zones · R32	→ 85
All in One 185 L K Series · R32	→ 86
All in One 185 L K Series with Electrical Anode · R32	→ 87
All in One 260 L K Series · R32	→ 88
All in One 260 L K Series with Electrical Anode · R32	→ 89
Bi-bloc K Series · R32	→ 90

## Aquarea EcoFlex

→ 81

## Aquarea T-CAP

Hydraulic M Series · R290	→ 76
Mono-bloc J Series · R32	→ 80
All in One 185 L K Series · R32	→ 93
All in One 185 L K Series with Electrical Anode · R32	→ 94
All in One 260 L K Series · R32	→ 95
All in One 260 L K Series with Electrical Anode · R32	→ 96
Bi-bloc K Series · R32	→ 97
All in One H Series. Super Quiet outdoor unit · R410A	→ 98
Bi-bloc H Series. Super Quiet outdoor unit · R410A	→ 99

## Aquarea Air Smart fan coils

Fan coil floor standing	→ 104
Fan coil wall-mounted	→ 105
Fan coil ducted thin / ducted	→ 106
Fan coil ducted multi zone thin / ducted multi zone	→ 108
Fan coil comfort	→ 110
Fan coil wall – FK1	→ 114

## More options for your home

Aquarea Loop	→ 100
Sanitary tanks	→ 116
Heat recovery ventilation unit	→ 118
Aquarea Vent - Counter flow ventilation	→ 120
Aquarea DHW Heat Pumps	→ 122
Accessories and control	→ 124
Heating and cooling capacity tables	→ 140
Examples of installations	→ 149

## Highlighted features

Panasonic's Aquarea range of heat pumps deliver major energy savings thanks to its incredible efficiency even at  $-20\text{ }^{\circ}\text{C}$ . The Panasonic Aquarea Heat Pumps are designed and produced by Panasonic and not by other companies.



Panasonic Aquarea Heat Pumps are part of a new generation of heating solutions that use a renewable, free energy source (air) to heat or cool the home and produce hot water by transferring heat rather than generating it.

The heat pump is one of the technologies listed on the International Energy Agency's (IEA) Blue Map, which aims to reduce CO<sub>2</sub> emissions to half of 2005 levels by 2050.

## Energy saving



### Natural refrigerant R290 with GWP 0,02.

Natural refrigerant R290 has low Global Warming Potential (GWP) of just 0,02, helping reduce CO<sub>2</sub> emissions and environmental impact.



### Refrigerant R32.

Our heat pumps containing R32 refrigerant show a drastic reduction in the value of Global Warming Potential (GWP).



### Better efficiency and value for medium temperature applications.

ErP 55°C

Energy efficiency class up to A++ in a scale from A+++ to D.



ErP 35°C

### Better efficiency and value for low temperature applications.

Energy efficiency class up to A+++ in a scale from A+++ to D.



DHW

### Better efficiency and value for domestic hot water.

Energy efficiency class up to A+ in a scale from A+ to F.



INVERTER+

### Inverter Plus system.

Inverter Plus system classification highlights Panasonic's highest performing systems.



AUTO SPEED

### A class water pump.

Aquarea are built-in with A class energy efficiency water pump. High efficiency circulating the water in the heating installation.



### ErP 2018.

Compliant following COMMISSION REGULATION (EU) No2016/2281.



EC MOTOR GREEN VENTILATION

### EC motor green ventilation.

Range of fan coils with improved efficiency and optional EC fan motors.

## High performance and indoor air quality



### Aquarea High Performance for low consumption houses.

From 3 to 16 kW. For a house with low temperature radiators or under-floor heating, our high performance Aquarea HP is a good solution. \* COP of 5,33 for 3 kW K series.



### Aquarea T-CAP for extremely low temperatures.

From 9 to 16 kW. It can work at outdoor temperatures as low as -28 °C and maintain the rated capacity down to -20 °C.



DHW

### DHW.

With Aquarea Heat Pumps, DHW can be produced efficiently, achieving high DHW COP of 3,6 with the L Series All in One indoor unit.



HEATING MODE

### Down to -20 °C in heating mode.

The heat pumps operate in heating mode with an outside temperature down to -20 °C.



WATER FILTER WITH MAGNET

### Water filter with magnet.

Easy access and fast clip technology for J Series onwards. Water filter only for H Series.



75°C OUTPUT WATER FLOW TEMPERATURE

### 75 °C output water.

Reaches water outlet temperature up to 75 °C for L and M Series.



65°C OUTPUT WATER FLOW TEMPERATURE

### 65 °C output water.

Reaches water outlet temperature up to 65 °C.



FLOW SENSOR

### Water flow sensor.

Included on H Series onwards.



5 YEARS COMPRESSOR WARRANTY

### 5 Years compressor warranty.

We guarantee the outdoor unit compressors in the entire range for five years.

## High connectivity



BOILER CONNECTION

### Renovation.

Our Aquarea Heat Pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures.



SOLAR KIT

### Solar kit.

For even greater efficiency, Aquarea Heat Pumps can be connected to photovoltaic solar panels with the optional PCB.



ADVANCED CONTROL

### Advanced control.

Remote controller with full dotted 3,5" wide back light screen. Menu with 17 available languages easy to use for installer and user. Included on H Series onwards.



INTERNET CONTROL

### Internet control.

The Panasonic Comfort Cloud App allows users to conveniently manage and monitor Panasonic residential heat pumps from a mobile device, anytime, anywhere.



BMS CONNECTIVITY

### BMS connectivity.

Aquarea Heat Pumps offer seamless integration into a Building Management System (BMS) using an optional gateway.



SG Ready



Q



APPROVED PRODUCT



MCS



CERTIFIED CORPORATION

Aquarea H and J Series heat pumps in combination with the optional PCB CZ-NSP4 hold the SG Ready Label (Smart Grid Ready Label), given by Bundesverband Wärmepumpe (German Heat Pump Association). This Label shows the real capacity of Aquarea to be connected in an intelligent grid control.

MCS Certificate number: MCS HP0086\*. Keymark: Check all our certified heat pumps on: [www.heatpumpkeymark.com](http://www.heatpumpkeymark.com). Passive House Institute: Certified models can be checked in <https://database.passivehouse.com>.

\* Not all products certified. As the certification process is on-going and the list of certified products constantly changing, please check for latest details on the official websites.

**Warning on quality of water and groundwater use:** This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.



# Aquarea – comprehensive heating solution by Panasonic

Welcome home. Experience comfort heating, energy savings and peace of mind with Aquarea heating solution.



**Introducing the Panasonic Aquarea – air source heat pump.**


Panasonic Aquarea Heat Pumps are designed to provide exceptional indoor comfort and energy efficiency. These advanced heat pumps offer a range of benefits, making them an ideal choice for heating, cooling and DHW production.

- High comfort all year-round
- High flexibility
- High energy savings in heating, cooling and DHW production
- Contributing to the decarbonisation of society

As much as 79% of the energy consumption of European homes comes from heating and producing DHW\*. That's why, compared to conventional boilers and electric heaters, highly efficient Panasonic air to water heat pump technology can make a significant difference. Moreover, by converting heat energy in the air into household warmth, this technology helps reduce CO<sub>2</sub> emissions and environmental impact.

\* <https://ec.europa.eu/eurostat>.

Up to 80%\* energy savings with Aquarea

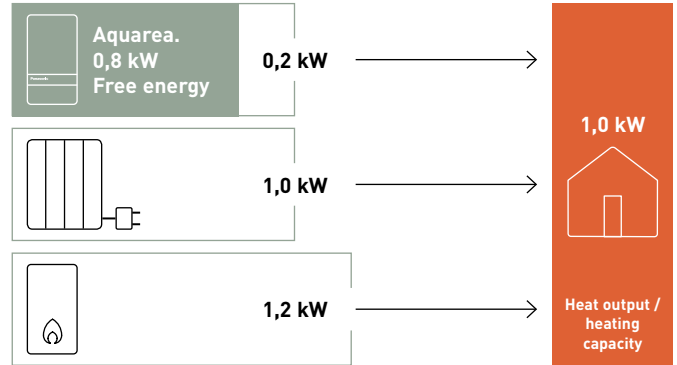

Power input / energy consumption power. \* At 35 °C flow temperature.

**Comfort heating and peace of mind with Aquarea solution.**

Panasonic extends its commitment to comfort and energy savings beyond heat pumps by offering a comprehensive range of solutions for indoor comfort.

**Fan coils for indoor climate control.**

**Residential ventilation for Indoor Air Quality with energy savings.**

**Room control and smart energy management services.**



**High efficiency tanks.**

**Aquarea Service Cloud for remote maintenance of the heat pump.**


**Aquarea Service +. Let us take care of your Aquarea Heat Pumps.**

# Discover the Aquarea Heat Pump range

Panasonic Aquarea provides the ideal solution for any project, enhancing the efficiency of homes and simplifying the installation process.

## Aquarea Hydraulic systems

The Aquarea Hydraulic system simplifies installation by requiring only water pipes between the outdoor unit and the interior of the building.

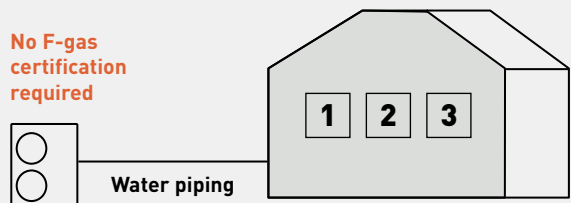

## Hydraulic indoor unit options

### 1 Stand-alone outdoor unit + optional DHW tank.


This hydraulic system without indoor unit offers high installation flexibility, ideal for retrofit projects.

### 2 All in One indoor unit.

The All in One unit combines the indoor unit and a DHW tank, simplifying installation and saving space.

### 3 Bi-bloc indoor unit + optional DHW.

This wall-mounted unit offers flexible installation with customizable tank sizes.



120 L - 185 L - 260 L



		5,0 kW	7,0 kW	9,0 kW	12,0 kW	16,0 kW	20,0 kW	25,0 kW	30,0 kW
Aquarea High Performance	1 ph	✓	✓	✓	✓	✓			
Aquarea T-CAP	1 ph			✓	✓				
	3 ph			✓	✓	✓	✓	✓	✓


## Aquarea DHW Heat Pumps

Using a compressor with natural refrigerant R290, Aquarea DHW Heat Pumps efficiently produce domestic hot water and significantly reduce energy consumption and CO<sub>2</sub> emissions compared to electric heaters and other traditional systems.



## Aquarea Split systems

The Aquarea split system features a separate outdoor unit and indoor unit connected by refrigerant pipes. It requires no antifreeze protection for outdoor piping, even during long periods of inactivity in cold climates.

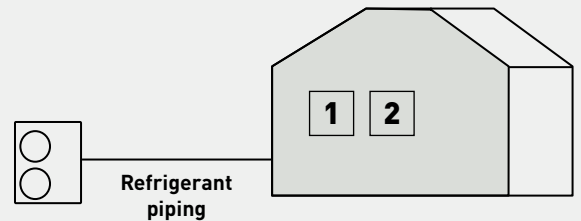

### Indoor unit options

#### 1 All in One indoor unit.

The All in One unit combines the indoor unit and a DHW tank, simplifying installation and saving space.

120 L - 185 L - 260 L



#### 2 Bi-bloc indoor unit + optional DHW.


This wall-mounted unit offers flexible installation with customizable tank sizes.



		5,0 kW	7,0 kW	9,0 kW	12,0 kW	16,0 kW
Aquarea High Performance	1 ph	✓	✓	✓	✓	✓
Aquarea T-CAP	1 ph			✓	✓	
	3 ph			✓	✓	✓

## Aquarea EcoFleX

Designed for new installations, the Aquarea EcoFleX heat pump combines an air-ducted unit with nanoe™ X technology and a hot water tank. It delivers hot water, heating, cooling, and cleaner air, all with outstanding efficiency, energy savings, and low CO<sub>2</sub> emissions.

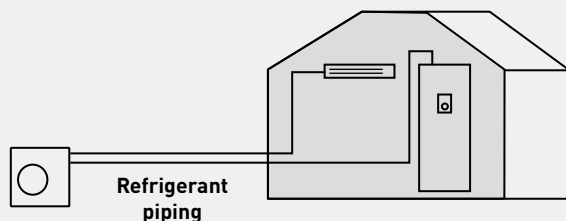




# Comfort heating and peace of mind with Aquarea solution

Panasonic extends its commitment to comfort and energy savings beyond heat pumps by offering a comprehensive range of solutions for indoor comfort.

## Aquarea Air Smart fan coils.

Stylish, compact fan coil units for high comfort and energy savings.

**Aquarea Air Smart fan coil floor standing.**  
Even narrower and thinner fan coils.




**Aquarea Air Smart fan coil wall-mounted.**  
The thinnest and most quietest in its class.



**Aquarea Air Smart fan coil ducted / ducted multi zone.**

Thin version with only 185 mm height.  
Integrated multi zone management (2-5 zones, with the multi zone line-up).

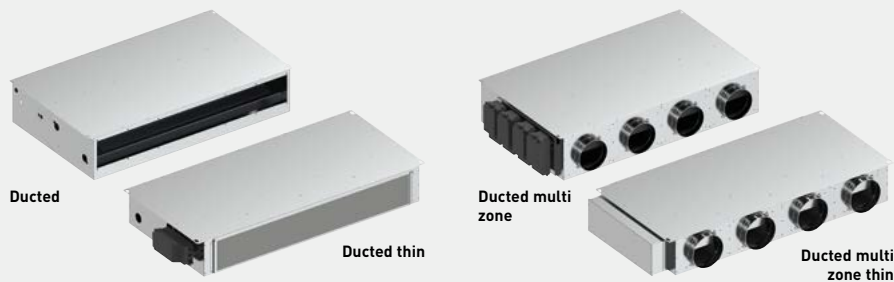


## Fan coil units.

A large range of fan coil units dedicated to commercial applications.

**NEW fan coil wall - FK1.**


Stylish design. nanoe™ X (Generator Mark 3).



**nanoe™ X**

**Fan coil comfort AC/EC fan.**

Floor and ceiling units with high configuration flexibility.

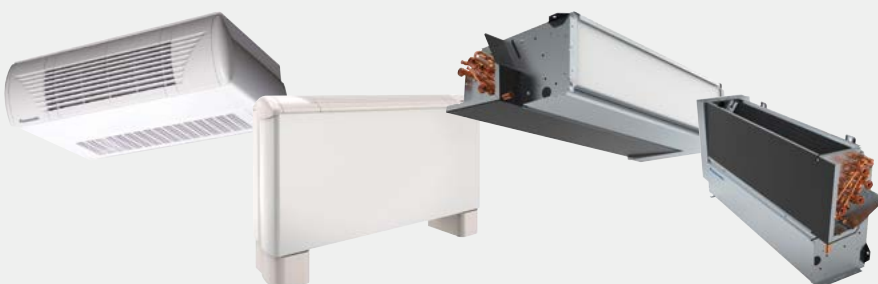

### Aquarea Loop, the water loop heat pump for multi-family buildings.

Efficiently replaces existing radiators in centralised heating systems.



### Wide range of water tanks DHW tanks, buffer tanks and combo tanks available.



### Residential ventilation units.

**Aquarea Vent -Counter flow ventilation units.**  
Suitable for single family houses or apartments.  
High-efficiency sensible heat recovery.



**Heat recovery ventilation unit.**  
Designed for areas up to approximately 140 m<sup>2</sup>.  
High energy-efficiency rotary heat exchanger with EC - technology fans.



### tado° for room heating control and smart energy management services.

Unlocking maximum efficiency and savings - without sacrificing cosy temperatures at any time.

tado° smart heating customers save an average of 22% on their energy consumption.

\* Based on internal data averaged across all tado° customers, collected up to 11/2023.



### Cascade solutions.

Boost the capacity up to 300 kW by connecting the Aquarea Heat Pumps in cascade.



### Aquarea Service Cloud.

For remote maintenance of the Aquarea Heat Pump.




# At the forefront of heating innovation: Panasonic expands Aquarea series with natural refrigerant R290

Aquarea air to water heat pumps with R290 refrigerant range is a groundbreaking low energy system for heating, cooling and domestic hot water production that delivers outstanding performance, aligning with our vision of a carbon-free society and our GREEN IMPACT plan.



**0,02** Global Warming Potential


Panasonic's newest series are engineered with industry leading natural refrigerant R290, which has a low Global Warming Potential (GWP) of just 0,02, helping reduce CO<sub>2</sub> emissions and environmental impact.



**Output water.**

Up to 75 °C water outlet down to -15 °C\* outdoor.


\* -10 °C for L Series. Down to 15 °C outdoor for 20, 25 and 30 kW models.



**Quiet operation.**


Only 27 dB(A) sound pressure at 5m\*.

\* Sound pressure calculation for WH-WDG05LE5, free standing, A +7 °C, W 35 °C in Quiet mode 3.



**Flexible hydraulic installation.**

Hydraulic connection between indoor and outdoor.

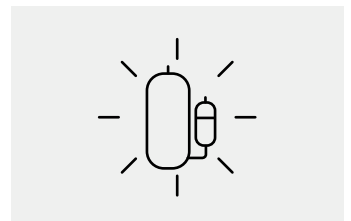


**Made and designed by Panasonic.**

Reliable outdoor units with Panasonic compressor.

**Output water. High performance under extreme conditions**

**Excellent solution for heating system retrofit.**

The compressor operates without backup heating down to -28 °C ambient temperatures, and can be integrated alongside existing radiators with a high-water flow temperature of up to 75 °C at -15 °C outside temperature. Even at -28 °C outside temperature, it can supply hot water at 55 °C.

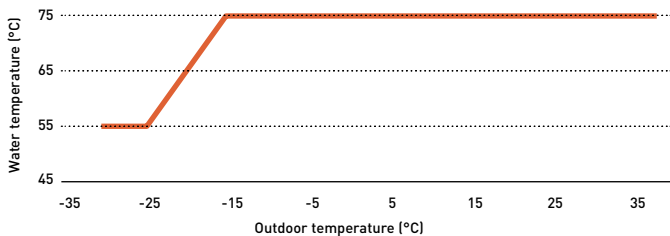


\* For M Series 9, 12 and 16 kW models. In case of L Series operation down to -25 °C and 75 °C water outlet down to -10 °C ambient.

**Sterilisation process without heater.**

It can also reach a domestic hot water temperature of up to 65 °C without the use of the electric heater, so the tank sterilisation can be performed with the heat pump operation.

**Quiet operation. Panasonic's unique low noise architecture**

The compressor, which is a major source of noise, is equipped with a double-bottomed structure to provide a safe, quiet structure that does not disturb neighbours in crowded residential areas.

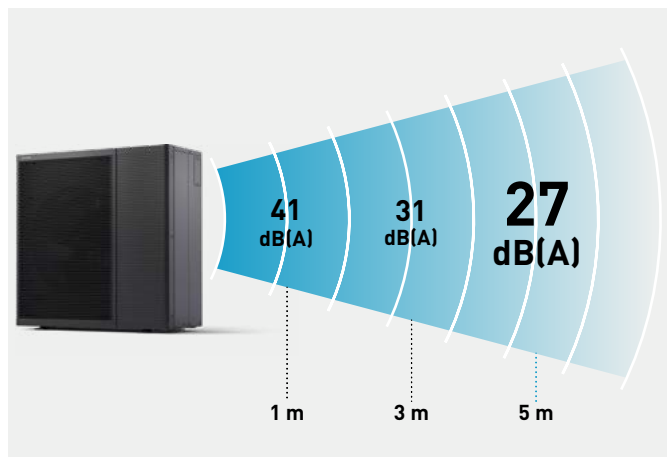

\* Sound pressure calculation for WH-WDG05LE5, free standing, A +7 °C, W 35 °C in Quiet mode 3.




**Flexible hydraulic installation**

The installation of the system is 100% hydraulic, with only water pipes between the outdoor unit and the interior of the home.

**More living space at home.**

No indoor safety measures needed for refrigerant or fuel gas piping.

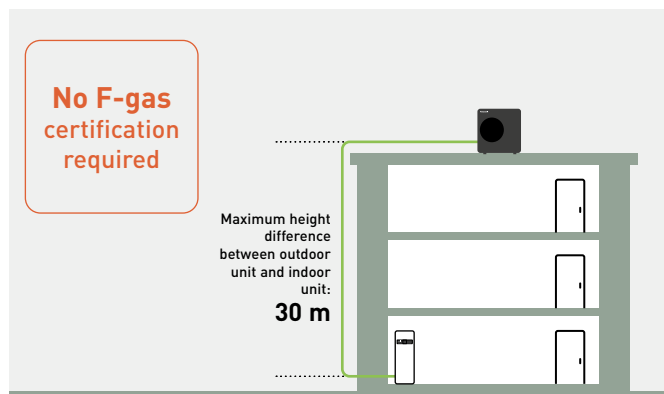

\* For L Series only when the outdoor unit is installed above the indoor unit, and the water pressure does not exceed 1 bar at the outdoor unit.

**Made and designed by Panasonic.**

**Aquarea High Performance L Series from 5 to 9 kW.**




**Aquarea T-CAP M Series from 9 to 30 kW.**



\* Check availability of units and combinations.



# Aquarea T-CAP M Series, the latest generation of Aquarea Heat Pumps with R290



Introducing M Series T-CAP, innovative Aquarea Heat Pumps with natural refrigerant R290, delivering superior performance even in extreme conditions.



reddot winner 2024



GOOD DESIGN AWARD 2024

**BEST 100**

\* For 9, 12 and 16 kW single and three phase.



### Output water.

Up to 75 °C water outlet down to -15 °C outdoor\*.


\* Down to 15 °C outdoor for 20, 25 and 30 kW models.



### Quiet operation.

Only 29 dB(A) sound pressure at 5 m\*.

\* Sound pressure calculation for WH-WXG12ME5, free standing, A +7 °C, W 35 °C in Quiet mode 3.



### Flexible hydraulic installation.

Hydraulic connection between indoor and outdoor.




### Made and designed by Panasonic.

Reliable outdoor units with Panasonic compressor.



### Panasonic Comfort Cloud App and Aquarea Service Cloud included.


Smart control and maintenance.



### High efficiency.

ErP 35 °C. Energy efficiency class up to A+++\*.

\* Scale from A+++ to D.



### Extreme conditions.

Compressor operating down to -28 °C outdoor temperatures.



### T-CAP.

Keeping heating capacity down to -20 °C.

**Flexible installation, suitable for retrofit and new buildings.**

Thanks to its new, modular concept, the outdoor unit can function independently with just an indoor remote control, for those seeking basic functionalities. Homeowners can opt for enhanced functionality by incorporating the more advanced control module or selecting between a Bi-bloc or All in One indoor units.



Available in 120 L, 185 L and 260 L DHW tank.




	Remote controller	Control module	Bi-bloc (available from 9 to 16 kW)	All in One (available from 9 to 16 kW)
CN-CNT	✓ [1]	✓ [2]	✓ [2]	✓ [2]
Backup heater	—	Field supply	✓	✓
Expansion vessel (10 L)	—	—	✓	✓
Additional functions	—	CZ-NS7P	CZ-NS6P	CZ-NS6P

**Output water. High performance under extreme conditions**

**Excellent solution for heating system retrofit.**

The compressor operates without backup heating down to -28 °C ambient temperatures, and can be integrated alongside existing radiators with a high-water flow temperature of up to 75 °C at -15 °C outside temperature. Even at -28 °C outside temperature, it can supply hot water at 55 °C.


\* For M Series 9, 12 and 16 kW models.

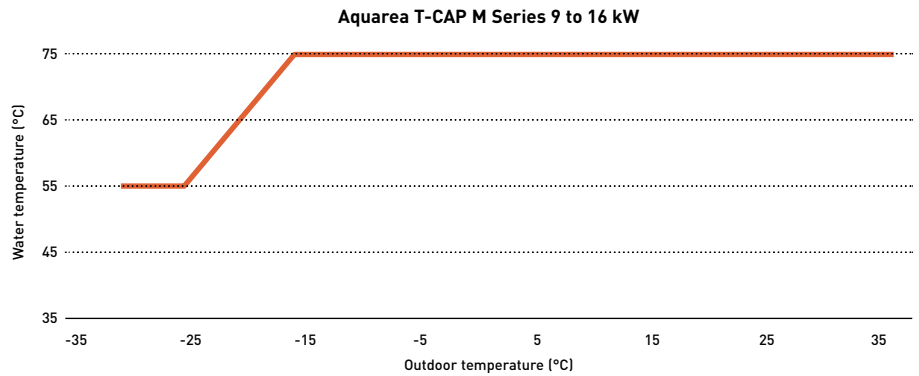

**Quiet operation. Panasonic's unique low noise architecture**

The compressor, which is a major source of noise, is equipped with a double-bottomed structure to provide a safe, quiet structure that does not disturb neighbours in crowded residential areas.


\* Sound pressure calculation for WH-WXG12ME8, free standing, A +7 °C, W 35 °C in Quiet mode 3.

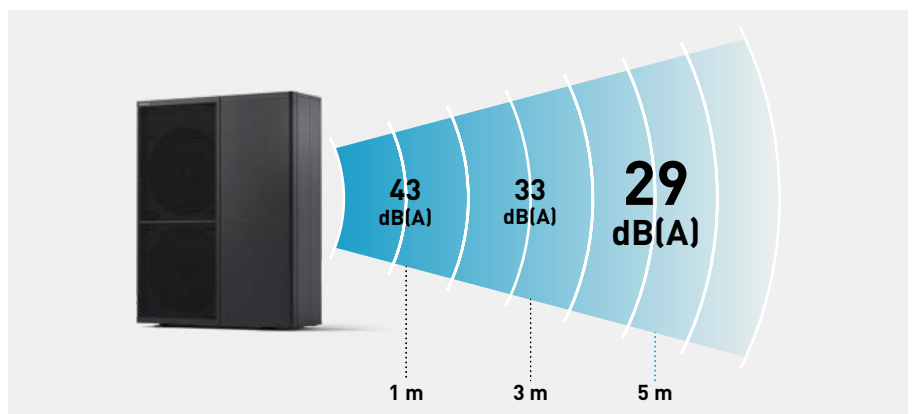

**Aquarea T-CAP, high performance whatever the climate**

With Aquarea T-CAP technology and the new compressor with Injection technology, Panasonic heat pumps can work in outdoor temperatures as low as -28 °C and maintain capacity without backup heating at -15 °C\*.

\* WH-WXG20/25/30ME8 work down to -25 °C outdoor.

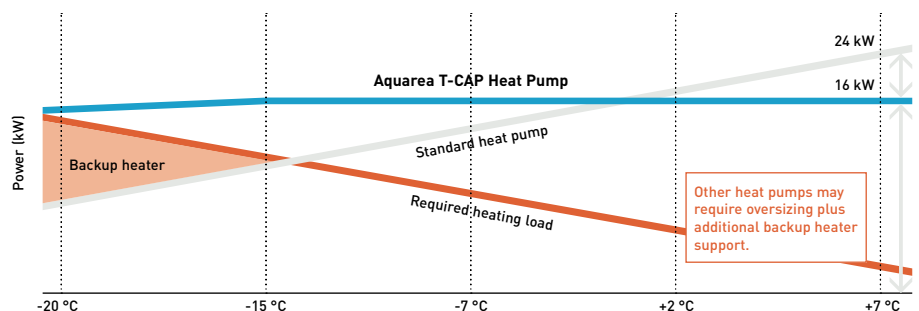

Other heat pumps may require oversizing plus additional backup heater support.

# Aquarea T-CAP M Series, the latest generation of high performance heat pumps with R290

Aquarea T-CAP M Series delivers a revolution in the design, performance, connectivity, and sustainability. Aligning with our vision of a carbon-free society and our GREEN IMPACT plan.




## High energy efficiency in heating and domestic hot water


The Aquarea M Series saves energy and significantly reduces operating cost by achieving the highest ErP energy rating.

Aquarea M Series can reach a domestic hot water temperature of up to 65 °C without the use of the electric heater, so the tank sterilisation can be performed with the heat pump operation for further energy savings.

\* Rating conditions: Heating: Inside air temperature: 20 °C Dry Bulb / Outside air temperature: 7 °C Dry Bulb / 6 °C Wet Bulb. Conditions: Water input temperature: 30 °C / Water output temperature: 35 °C. Energy rating for WH-WXG12ME8.




**Energy efficiency class up to A+.**  
Scale from A+ to F.



**ErP 35 °C / 55 °C.**  
**Energy efficiency class up to A+++/A++.**  
Scale from A+++ to D.

## Maximising hot water comfort

- Up to 40% more tap water with a higher tank temperature setting to save space
- New domestic hot water circulation mode for instant availability of hot tap water
- During sterilisation, the domestic hot water circulation mode is activated to ensure sterilisation of the water pipes

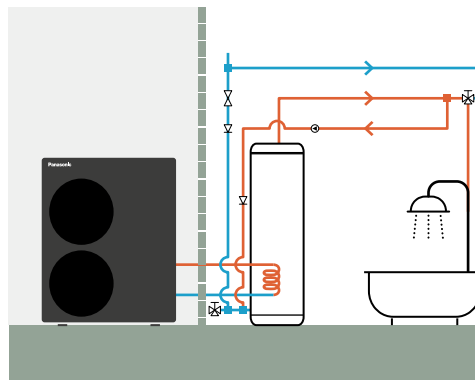

The hot water in the pipes recirculates back to the tank at set intervals during the set time period, ensuring instant hot water for the end user.

## Internet adapter included for Smart Control and remote maintenance

The Aquarea M Series comes standard with an internet adapter for Wi-Fi or WLAN connection. It can be easily connected via the front panel of the indoor units or the control module, providing flexible and intuitive connectivity.



## Reliable technology.

The outdoor units are equipped with a Panasonic R290 scroll compressor. The compressor is manufactured in-house with T-CAP technology including injection. The outdoor heat exchanger is protected with a Bluefin treatment for harsh ambient conditions.


## Great serviceability

Cutting-edge outdoor unit design keeps the PCB in a safe and accessible location.

## Aquarea M Series safety optimisation.

- 1 | Non-flammable control box
- 2 | Power box cable gland with sealed connections
- 3 | Air/refrigerant separator







\* This image applies to 9, 12 and 16 kW.

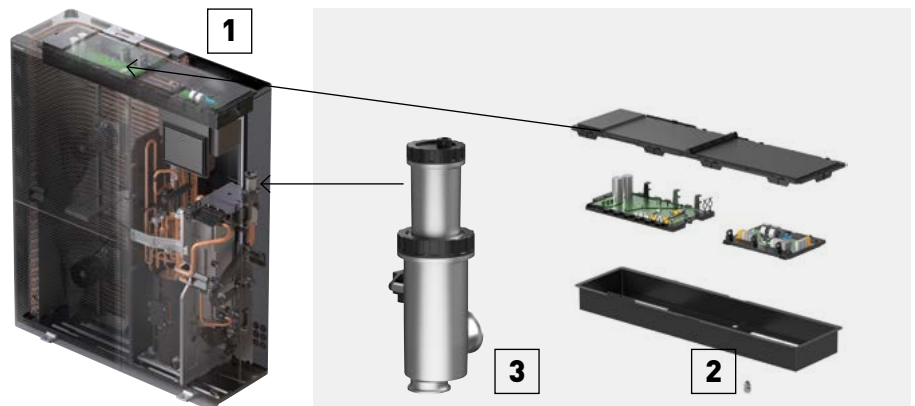

# Big Aquarea T-CAP M Series, the ideal solution for centralised heating and DHW installations

The new Big Aquarea M Series offers a flexible, compact and energy-efficient solution for central heating and/or domestic hot water installations in multi-family or commercial buildings.

The solution is suitable for both new buildings and retrofits, as it offers a more sustainable alternative to traditional fossil fuel heating systems and it can be easily integrated with existing water system such as fan coils, floor heating or domestic hot water tanks.

 <p><b>300 kW</b></p>		 <p><b>55 °C</b></p>			 <p><b>65 °C</b></p>
<p><b>Up to 300 kW in cascade.</b></p>	<p><b>Compact solution with small footprint.</b></p>	<p><b>Keeping capacity at 55 °C water outlet down to -15 °C outdoor.</b></p>	<p><b>Quiet operation.</b></p>	<p><b>Panasonic Inverter compressor.</b></p>	<p><b>DHW at 65 °C with compressor only.</b></p>

- Units from 20 to 30 kW, up to 300 kW in cascade
- Easy replacement of other heating sources
- Flexible control options: remote control only or control module for enhanced functionality
- Seamless Modbus integration
- Designed to blend with architecture and environment




**Maintained capacity.  
Time-saving installation.  
Cost-saving.  
Space-saving.**

**2x 20 kW  
heat pump**



**Conventional cascade system**

**1x 30 kW  
Big Aquarea T-CAP**




**New Panasonic Aquarea T-CAP M Series**

For 30 kW demand at 55 °C water outlet and -7 °C outdoor temperature.



# Big Aquarea for centralised heating and DHW installations in multi-family or commercial buildings

The new Big Aquarea M Series offers a flexible, compact and energy-efficient solution for central heating and/or domestic hot water installations in multi-family or commercial buildings.

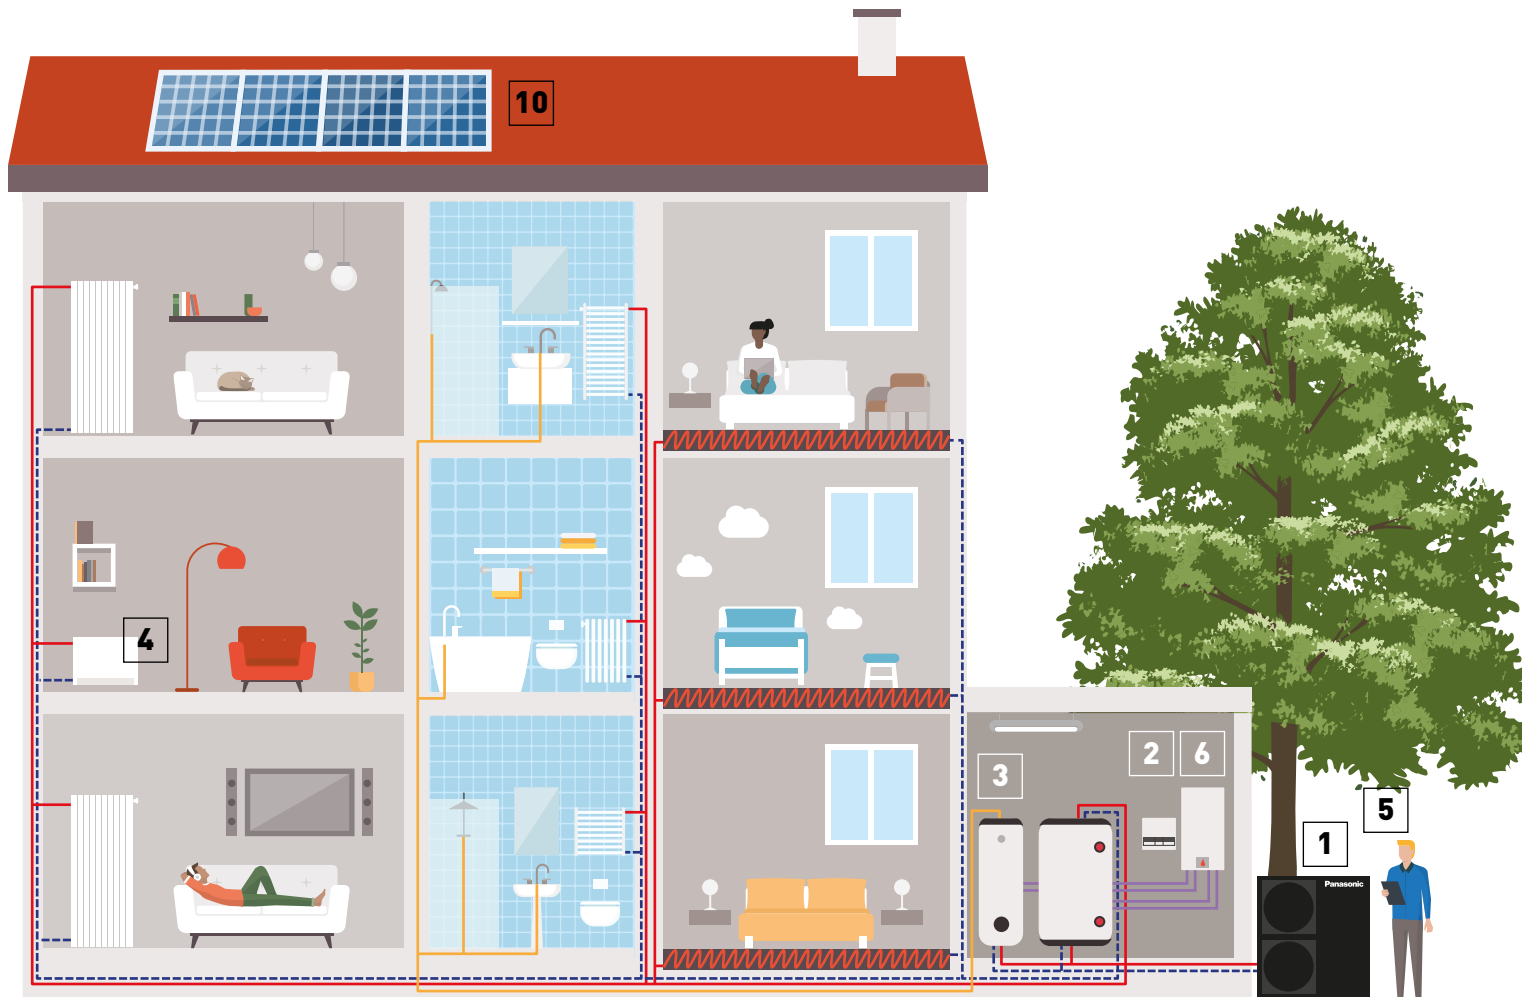

**1**  
**Big Aquarea T-CAP M Series.**  
25 kW heat pumps in cascade, for a space-saving solution. It can replace an old fossil fuel boiler.



**2**  
**M Series control module.**  
The control module allows for enhanced control functionality. Operation with the remote controller only is also possible.




**3**  
**High efficiency DHW tank.**  
A high efficiency tank provides the required volume of hot water, at the correct temperature, reducing energy costs.



**4**  
**Aquarea Loop.**  
The water loop heat pump provides heating and cooling for every apartment or room connected to a central water loop.




**4**  
**Fan coils, radiators or floor heating.**  
Aquarea Heat Pumps can be integrated into a new or existing water system.

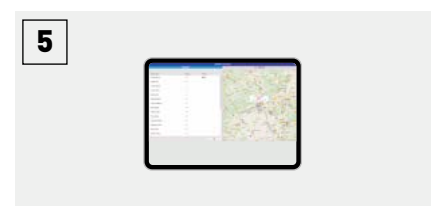

**5**  
**Aquarea Service Cloud.**  
This IoT solution provides powerful and user-friendly management and monitoring of Aquarea Heat Pumps and enables remote maintenance.

## A revolution in the design, performance, connectivity, and sustainability.

- Scalable solution, up to 300 kW in cascade
- Suitable for new build and retrofit
- Up to 75 °C water outlet
- Easy replacement of other heating sources and integration into existing water systems
- Quiet operation
- Maintains output at 55 °C down to -15 °C
- Hot water production at 65 °C with compressor only
- Flexible control options and seamless Modbus integration

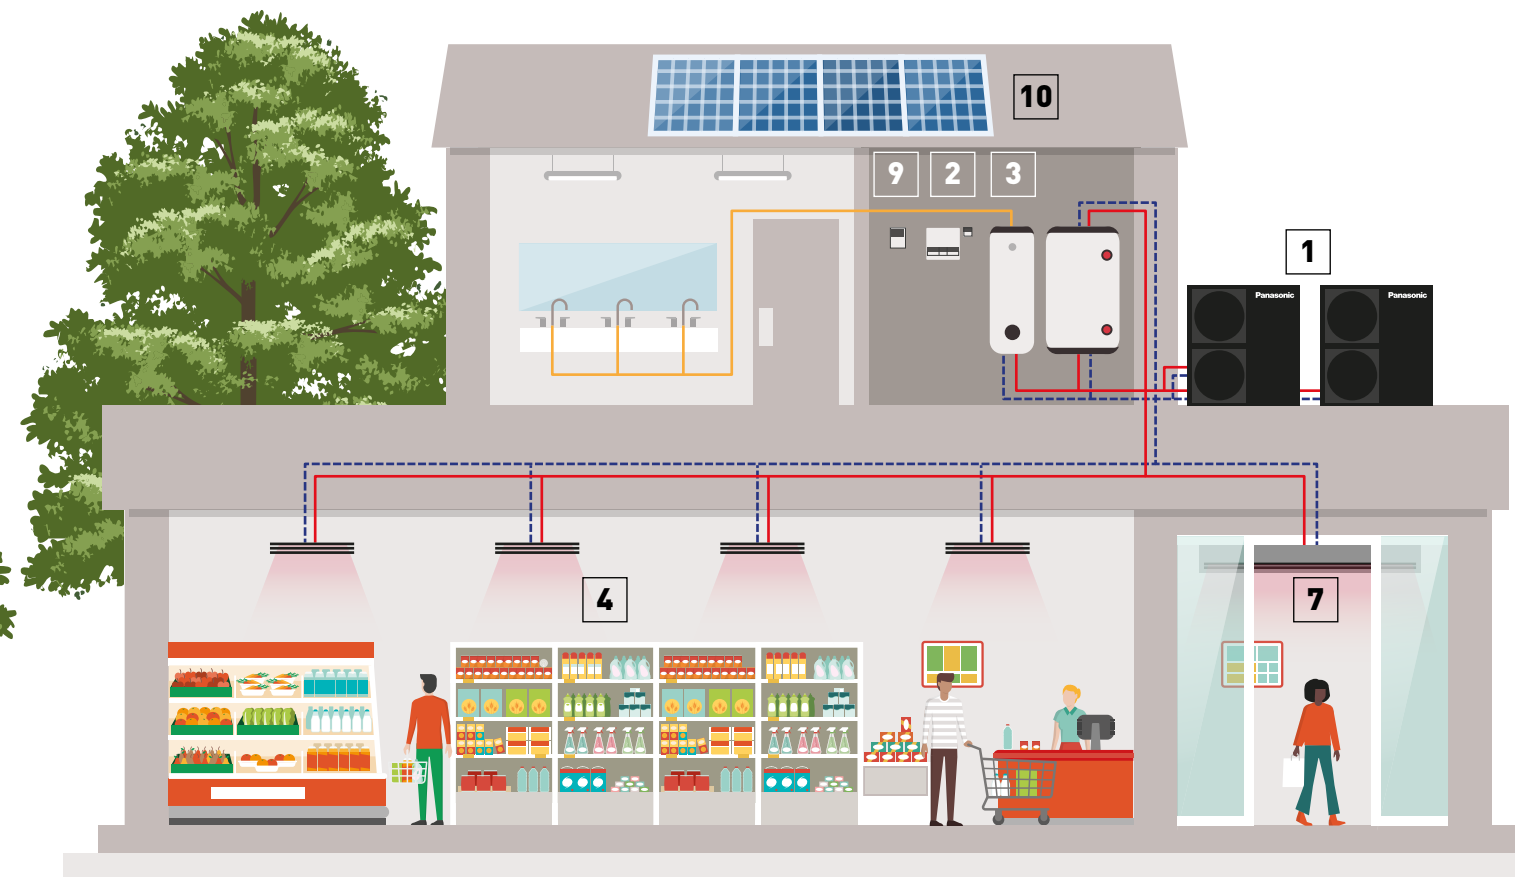

6



### OPTIONAL. Bivalent mode.

Cost-effective bivalent mode with energy tariff logic when combined with an existing boiler.

7



### Air Curtain with water Coil.

Water coil air curtains can be used in the hydraulic system to have efficient performance of the water system.

8



### BMS integration.

The system can be easily integrated into a Modbus project with the optional accessory.

9



### Cascade manager.

Manages up to 10 Aquarea Heat Pumps, balancing working hours, can control up to 2 buffer tanks and integrates PV, among others.

10



### Photovoltaics.

Thanks to the integration with PV, the demand or power consumption for heating or hot water production is adapted to the PV production.



### Burger & Lobster restaurant. Bath, UK.

Panasonic's air to water Aquarea system has been installed in the latest glamorous Burger & Lobster restaurant in Bath. The Octagon Chapel, a large listed building in the city centre, was converted to accommodate the restaurant, and Panasonic's Aquarea system provided an extensive, energy efficient and unobtrusive heating and cooling solution.

## Aquarea Loop, the water loop heat pump for multi-family buildings


The Aquarea Loop is a decentralised water-to-air heat pump using R290, designed to provide heating and cooling for each apartment connected to a central water loop.



The system circulates water year-round at a neutral temperature (20 ~ 30 °C), preventing condensation on uninsulated pipes during summer. The Aquarea Loop adjusts the water temperature to optimal levels, ensuring each room is properly heated or cooled.


This setup maximizes the use of renewable energy, minimizes heat losses in distribution, and enhances the environmental performance of the apartment building.

**Aquarea Loop efficiently upgrades the heat of the low temperature loop. Thus, a lower temperature may be used.**

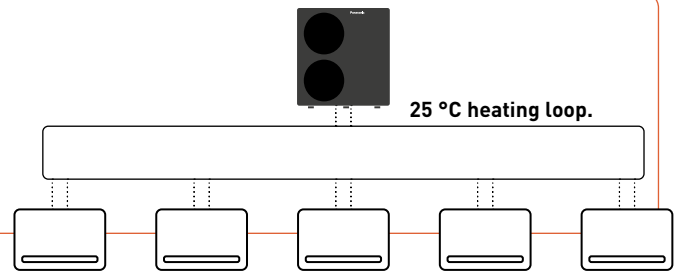

**Efficiently replaces existing radiators in centralised heating systems.**

Aquarea Loop offers low thermal losses and high seasonal efficiency. Enjoy simultaneous heating and cooling while effortlessly integrating with existing pipework for seamless renovations.



**Low thermal losses.**



**High seasonal efficiency of the entire system.**



**Simultaneous heating and cooling.**



**Use of existing pipework for renovations\*.**

\* Based on the low flow rate requirement – must be checked on each project.


#### And more:

- Compact indoor unit – depth of only 140 mm
- DC Inverter compressor with R290
- Lower CO<sub>2</sub> emissions than traditional heating systems
- Utilizes renewable energy
- Improves the energy class of the building
- No thermal losses in distribution
- Reduced operating costs
- No need for gas connection or chimney
- Easy installation
- Connects to individual apartment's electricity
- Accurate energy allocation for each Aquarea Loop with metering

#### Retrofit application: centralised low temperature installation for decentralised heating and cooling

The Aquarea Loop is the perfect replacement for existing radiators, ensuring optimum temperatures all year round.

- 1 | Centralised Aquarea Heat Pump (first stage of generation) replacing a high temperature traditional heat source
- 2 | Loop water temperature 20 ~ 30 °C. The existing pipework may be reused
- 3 | Aquarea Loop heat pump (second stage of generation) replacing conventional radiators

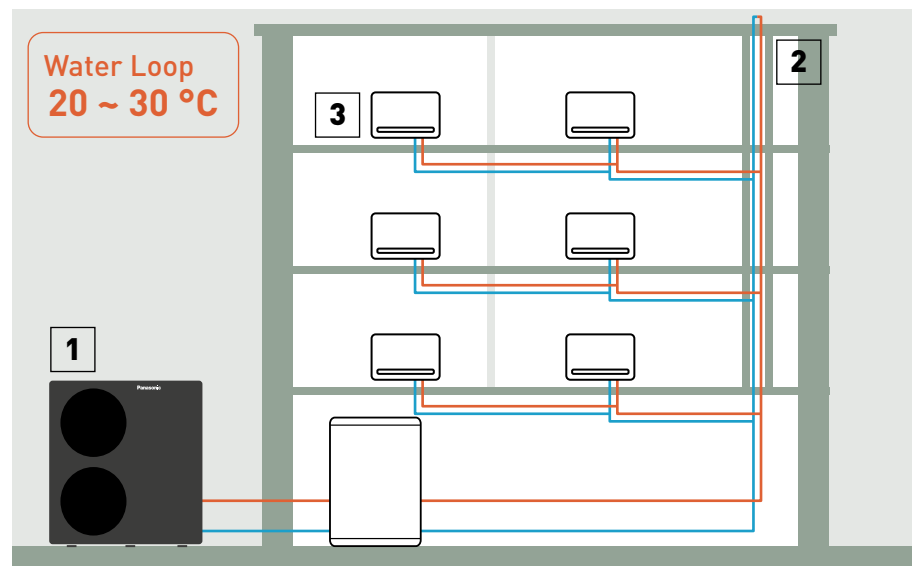



## Aquarea All in One Hydraulic M Series

The ultimate space-saving solution. Available in 120 L, 185 L and 260 L DHW tank, with a footprint of just 599 x 602 mm.



## Premium white indoor units.

The indoor unit is designed to blend into your interior space effortlessly. In premium white, faithful to the Aquarea spirit, underlined by the seamlessly integrated controller which provides a sleek black band across the unit.


## New All in One with 120 L DHW tank




**599 x 602 mm footprint reduces required installation space.**



**No buffer tank required, reducing space, cost and installation time.**



**Up to 40% more tap water with a higher tank temperature setting.**



**Robust body and top surface enables installation of a top ventilation unit.**

## Aquarea All-in-One M series: the best Panasonic technology.



\* Tentative information.

### Great serviceability.

- Easy access to hydraulic part thanks to door opening mechanism
- All sensors can be checked from the remote controller
- Water pressure sensor and reading on home-screen


### Other high quality components inside.

- Maintenance free Inox stainless 120 L, 185 L or 260 L tank
- Variable speed water pump ("A class")
- Backup heater
- 3 way valve inside



### Extended elevation difference (up to 30 m).

With the new expansion vessel, the All in One M Series allows a high indoor/outdoor height difference of up to 30 m.

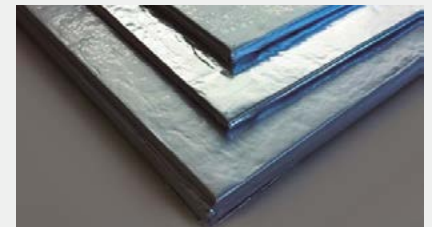

### U-Vacua™ Vacuum insulation panel.

U-Vacua™ panels offer 19 times the insulation performance of polystyrene foam. Since the system retains heat longer, it needs to heat up fewer times each day, resulting in energy savings.

## Aquarea All in One with 2 zones.

### The optimal solution for installations with 2 heating zones.

- 2 heating circuits, with 2 different water temperatures
- 2 variable speed water pumps "A class" and 2 water filters
- Floor heating water control with mixing valve

\* Only available with a 185 L DHW tank.

## Aquarea All in One with Electrical Anode:

The All in One with built-in impressed current anode is the ideal solution for installations in locations with harsh water conditions.

# Aquarea K Series

A revolution in design, efficiency, connectivity and sustainability. Aquarea K Series is a ground breaking low-energy system for heating, cooling and domestic hot water production that delivers outstanding performance. This model is ideal for new installations and well-insulated homes.



<p><b>Wide range.</b> Wide range to suit all homes: High Performance and T-CAP.</p>	<p><b>Further noise reduction.</b> -8 dB(A) in Quiet mode.</p>	<p><b>Optional remote control and maintenance.</b> Panasonic Comfort Cloud App and Aquarea Service Cloud.</p>	<p><b>High energy efficiency for heating.</b> High energy class for low temperature applications*.</p>	<p><b>High energy efficiency for domestic hot water.</b> DHW COP up to 3,5*. <small>* Scale from A+ to F.</small></p>	<p><b>Output water.</b> Up to 60 °C water outlet down to -10 °C outdoor.</p>

\* Scale from A+++ to D. Might not apply to all the models.

## Further advanced features


- High tank insulation performance thanks to U-Vacua™\*.
- All in One indoor unit available in 185 L and 260 L
- Less frequent maintenance with pre-installed magnet filter
- Water pressure sensor built-in

- Easy access to hydraulic parts
- Operation without backup heater at -25 °C
- Bluefin treatment protection on outdoor heat exchanger for harsh ambient conditions

\* Only applicable to All in One indoor unit. U-Vacua™ is a vacuum insulation panel (VIP) technology.

## Aquarea K Series keeps 60 °C water outlet temperature even at very low temperatures

Aquarea K Series is able to keep 60 °C water outlet temperature in outdoor temperatures down to -10 °C, keeping high comfort in the room even at low temperatures. With other heat pumps, water temperature dramatically drops at low outdoor temperatures, making the heat pump to work out of the design conditions and creating discomfort inside the room.

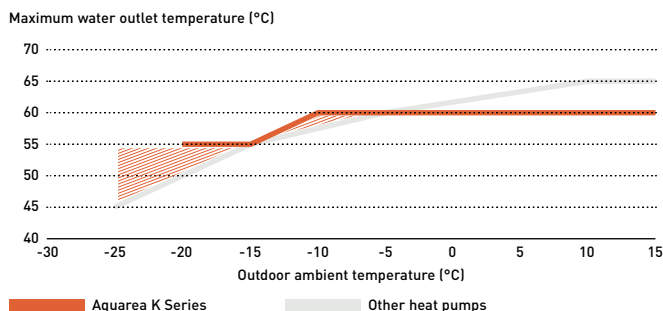

**Aquarea K Series for every project need.**

Available in both T-CAP and High Performance, the Aquarea K Series offers a versatile range of solutions to suit different project sizes and needs.



**The outdoor unit is designed to harmonize with architecture and the environment**

The compressor, which is a major source of noise, is equipped with a double-bottomed structure to provide a safe, quiet structure that does not disturb neighbours in crowded residential areas.




**-8 dB(A) in Quiet mode**


**Aquarea High Performance K Series.**

**For new installations and low consumption homes.** Suitable for a wide range of properties that demand exceptional efficiency and high energy savings. Featuring COPs as high as 5,33 <sup>1)</sup> this solution is perfect for either underfloor heating or low temperature radiators.

1) K and J Series 3 kW.




**Energy efficiency class up to A+.**  
Scale from A+ to F.



**ErP 35 °C. Energy efficiency class up to A+++.**  
Scale from A+++ to D.

\* Rating conditions: Heating: Inside air temperature: 20 °C Dry Bulb / Outside air temperature: 7 °C Dry Bulb / 6 °C Wet Bulb. Conditions: Water input temperature: 30 °C / Water output temperature: 35 °C. These energy efficiency might not apply to all models.

**With a COP of 5,33, the Aquarea Heat Pumps offers savings of up to 82% on heating costs compared to electric heaters, as a large portion of the energy is extracted from the air for free.**

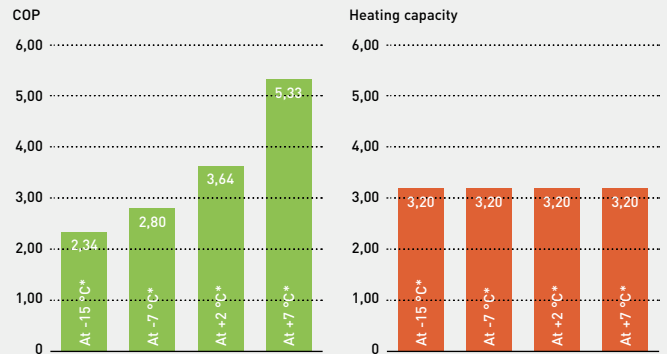

\* KIT-ADC03K3E5 at 35 °C water outlet.

**Aquarea T-CAP K Series.**

**For retrofit and new builds, the ideal solution for those installations where the output capacity is demanding.**

The entire Aquarea T-CAP line-up is excellent for replacing gas or oil boilers and for connecting to new underfloor heating, radiators or fan coil units.


Aquarea T-CAP can maintain the rated heating capacity even at -20 °C <sup>1)</sup> outdoor temperature, without requiring an electrical heater. This makes it an ideal solution for locations with extremely low temperatures

1) At 35 °C flow temperature.

**Aquarea T-CAP, high performance whatever the climate**

With Aquarea T-CAP technology, Panasonic heat pumps can work in outdoor temperatures as low as -28 °C and maintain capacity without backup heating at -20 °C\*.

\* At 35 °C flow temperature.

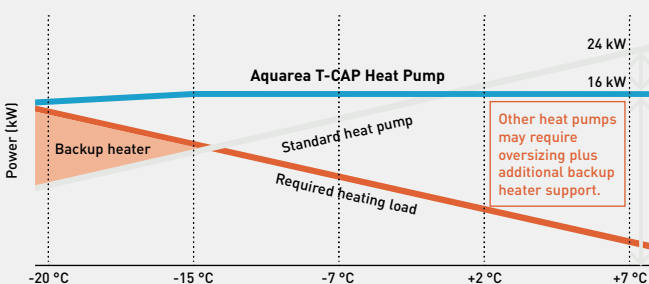


**How Aquarea T-CAP K Series maintains performance even at -20 °C outdoors**

A patent has been obtained for technology that can maintain heating capacity even in low outdoor temperatures through optimal control that comes from incorporating dual-piped heat exchanger into the refrigeration cycle.

**Dual-piped heat exchanger.** Low pressure and low-temperature refrigerant in the inner pipe.

Image of the Aquarea T-CAP J Series Mono-bloc.

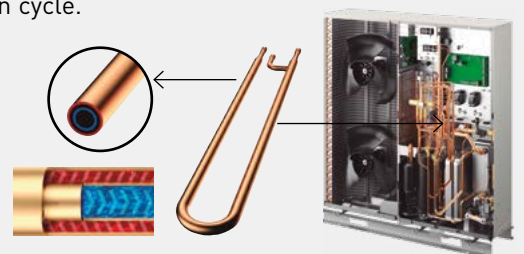



# Aquarea EcoFlex


**2-in-1 - Sustainable and efficient comfort all year long.**

Aquarea EcoFlex is a groundbreaking heat pump that connects an air ducted unit with nanoe™ X technology providing heat recovery hot water, space heating, space cooling and cleaner air. Outstanding efficiency and energy savings with low CO<sub>2</sub> emissions.




Heating, cooling and domestic hot water systems for a green future.

With Aquarea Heat Pump the heat energy is taken from the ambient air. One outdoor unit for synchronous air to air and air to water supply.



**Multi solution.**

Trendy air to water + DX value added solution, featuring bi-heating (simultaneous air heating and DHW or heating), heat recovery function (re-use wasted heat from the outdoor unit for DHW production) and Non-stop heating (air heating runs continuously even in defrost operation).



**Compact design.**

Ideal for installations with limited spaces. The compact outdoor unit can supply both air conditioning and hot water at the same time. The Tank fits beautifully in any kitchen, small laundry space, or any other desired area. No need for gas supply.



**Smart convenience.**

Energy savings, comfort and control from anywhere. Aquarea EcoFlex is equipped standard with Wi-Fi to enable smart control and energy consumption monitoring, using Aquarea Smart Cloud.



**nanoe™ X technology to improve protection 24/7.**

This advanced technology utilises hydroxyl radicals (also known as OH radicals), which inhibit the growth of certain pollutants such as allergens, bacteria, viruses, moulds, odours, and certain hazardous substances.




Unique technology that drives the system

**Heat recovery.**

Cooling (air to air) + DHW (air to water).


Heat exchange that took place in outdoor unit now is carried out in the water heater.

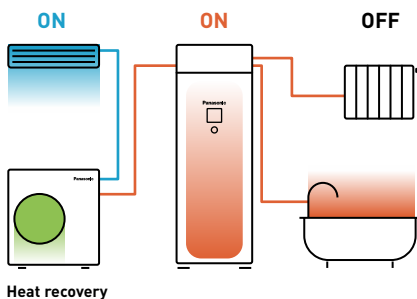

**Bi-heating.**

Heating (air to air) + Heating (air to water) or DHW.



Heat from the compressor is supplied for heating and DHW simultaneously.

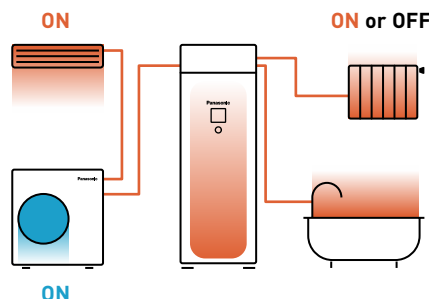

**Non-stop heating.**

Heating (air to air) continuous operation.

Use heat from tank to defrost and heat simultaneously.

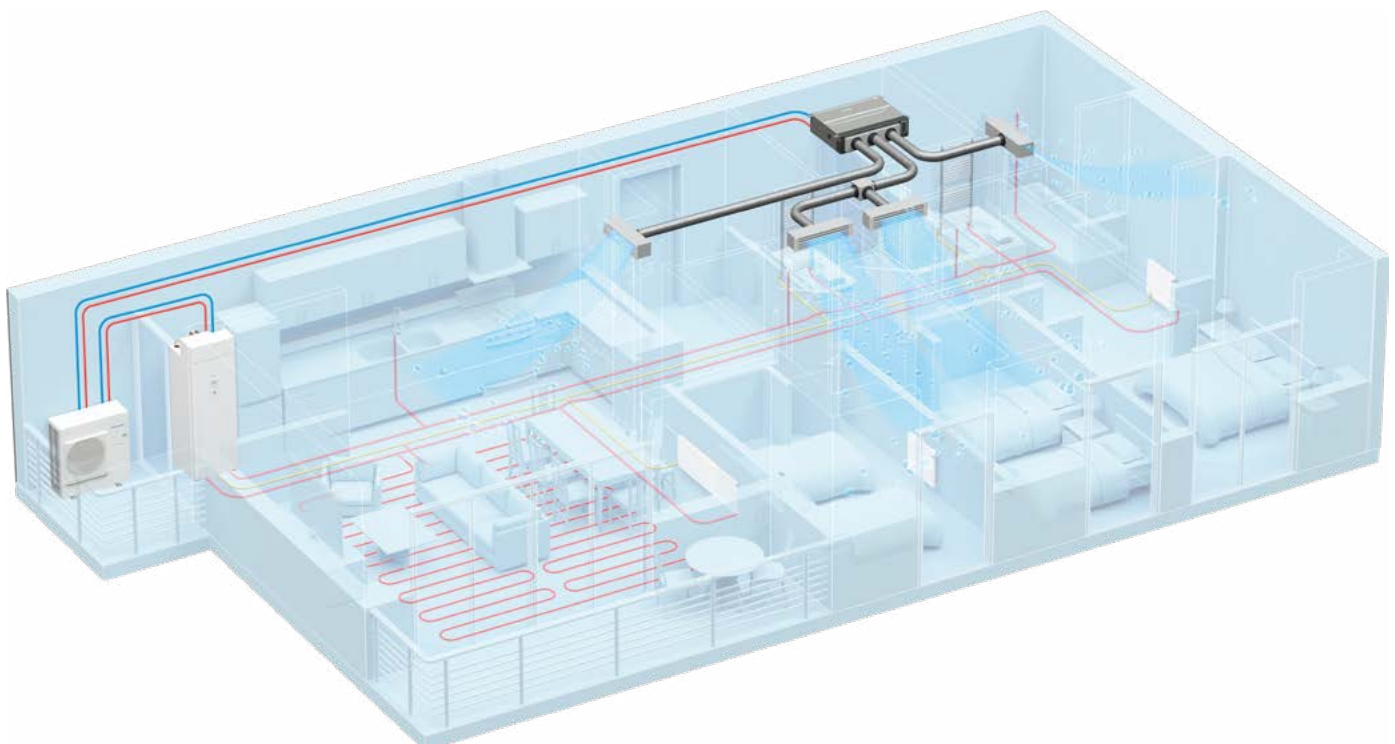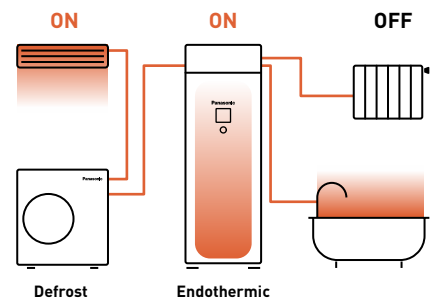

# Aquarea EcoFlex.

## Air to water

Tank unit + heat exchanger box to produce domestic hot water and space heating using radiators or floor heating.

Fits beautifully in any kitchen, small laundry space, or any other desired area

Kitchen.



Laundry space.




The same depth as a regular refrigerator/washing machine.

Deep: 600 mm  
Wide: 598 mm

Deep: 600 mm  
Wide: 600 mm

Deep: 600 mm  
Wide: 600 mm

### Compact, yet easy to maintain



#### 1 | Heat exchanger box structure to mitigate R32 refrigerant restrictions, flexible installation.

Water heat exchanger is designed above the top plate to comply with installation area regulation for products using large amounts of R32 refrigerant.

#### 2 | Maintained serviceability.

- Easy maintenance concept
- Access to hydraulic parts thanks to door opening mechanism
- No buffer tank required, reducing space, cost and installation time

#### 3 | Improved water filter for less maintenance.


Superior dust removal capacity of the water filter. Less frequent filter cleaning means more convenience.

#### 4 | Slim indoor unit with big tank capacity.

Built-in 185 L water tank in a slim W 598 x D 600 mm indoor unit housing.

#### 5 | U-Vacua insulation technology.

Panasonic U-Vacua™ is a high performance vacuum insulation panel with very low thermal conductivity, that performs about 19 times better than standard urethane foam.

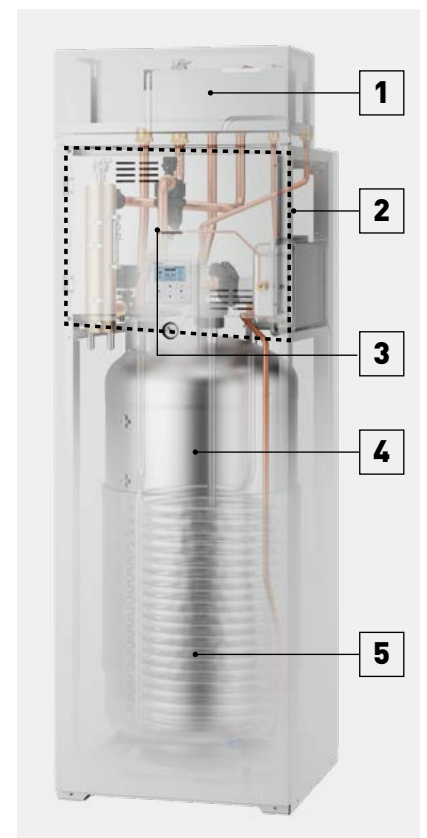



# Aquarea EcoFleX. Air heating or cooling and cleaner air

Aquarea EcoFleX ducted unit has been designed to provide better comfort and flexibility.



[+ SEE PRODUCT SPECIFICATIONS](#)

## Superior air quality

Standard equipped with nanoe™ X, a unique technology that cleans indoor air.



## Ideal for living spaces


- Static pressure level: 10 - 150 Pa
- Compact body: Only 250 mm high
- Smart control ready via CONEX
- Rated up to SEER / SCOP class A+/A
- Low noise operation (34 dB(A)) using an improved fan casing
- DC fan motor, built-in drain pump



## Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment


Thanks to the nanoe™ X properties, several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen and certain hazardous substances.

### Deodorises



Odours


### Capacity to inhibit 5 types of pollutants



Bacteria and viruses



Mould



Allergens



Pollen



Hazardous substances




Skin and hair

The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not medical device, local regulations on building design and sanitary recommendations must be followed.

[+ REFER TO PAGE 14 FOR MORE DETAILS AND VALIDATION DATA](#)

## nanoe™ X: improving protection 24/7

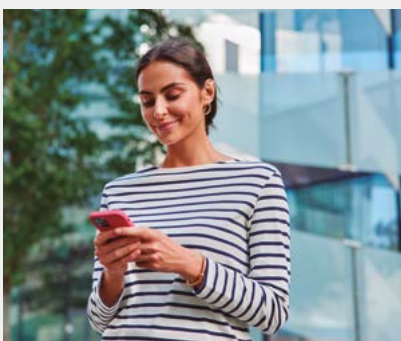

Acts to clean your air, so that the indoor environment can be a cleaner and more pleasant place to be all day long. nanoe™ X works together with heating or cooling function when you are at home and can work independently when you are away.

Give the air conditioning the strength to increase the protection at home with nanoe™ X technology and convenient control via the Panasonic Comfort Cloud App.



### Cleans the air when you are away.


Leave the nanoe™ mode ON to inhibit certain pollutants and deodorise before you return home.

### Improves your environment when you are at home.

Enjoy a cleaner, comfortable space with loved ones.

## Selectable inlet air position

Inlet air position may be adjusted by means of a removable panel, to allow rear or bottom entry, depending on the duct installation.

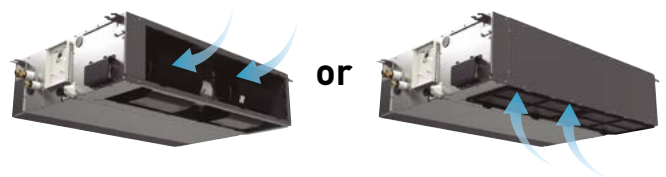

## Compact body

- Only 250 mm high
- Light units from 25 to 39 kg

Conventional model	33 kg	290 mm
Ducted unit	30 kg	250 mm

### Ducted unit








# Smart Solutions for Aquarea systems

Panasonic provides a comprehensive range of smart solutions for managing heating, cooling, and domestic hot water installations with Aquarea Heat Pumps. Each app features advanced functionality, user-friendly interfaces, and seamless connectivity, providing complete control and optimization of Aquarea systems.



With multiple apps designed to meet a variety of requirements, the optimal solution can be chosen based on the specific needs of the project—whether it’s achieving greater energy savings, enhancing comfort, or ensuring peace of mind with remote maintenance by a service partner.

Compare Aquarea Smart Solutions	 Comfort Cloud	 Aquarea Home	 tado°
	<b>Panasonic Comfort Cloud App</b>	<b>Aquarea Home App</b>	<b>tado°</b>
<b>Aquarea Heat Pump management</b>	✓ Requires Cloud adapter CZ-TAW1B/ CZ-TAW1C. Included with Aquarea L, M Series and EcoFlex.	✓ Requires Home Network Hub PCZ-ESW737.	✓ Requires Heat Pump Optimizer X PAW-THPOXE.
<b>Remote maintenance via Aquarea Service Cloud</b>	✓	—	—
<b>Room control</b>	✓ 1 or 2 heating zones control	✓ Aquarea Air Smart fan coils Aquarea Loop Aquarea Vent RAC Solo Requires remote control with Wi-Fi or Home Network Hub PCZ-ESW737.	✓ Radiators Underfloor heating Requires tado° Room control devices and Heat Pump Optimizer X or Bridge X.

# New Aquarea Home App, seamless control of all Aquarea room solutions

Introducing the Aquarea Home App: Effortlessly manage the Aquarea room solutions anytime, anywhere, 24/7.



Aquarea Home

The Aquarea Home App enables seamless control and monitoring of the Aquarea room solutions through an intuitive, user-friendly interface

The app provides centralised management of Aquarea Air Smart fan coils, Aquarea Loop, RAC Solo and Aquarea Vent ranges using a smartphone or tablet. It can also integrate Aquarea Heat Pumps, allowing complete control of the entire heating and cooling system, all from a single app <sup>1)</sup>.



### Centralised remote control.

Manage all your Aquarea systems from one app.



### Further energy savings.

Control individual rooms or zones.



### Weekly timer.

Calendar system for all home devices.



### User-friendly interface.

Easily manage home comfort.

Aquarea Air Smart fan coils <sup>1)</sup>.

Aquarea Vent <sup>1)</sup>.

Aquarea Loop <sup>1)</sup>.

RAC Solo <sup>1)</sup>.

Aquarea heating and cooling systems <sup>1)</sup>.



## Comfort management, anytime, anywhere.

- Home and room management
- Device settings
- Scheduling



## Requirements for connecting with Aquarea Home App

- 1 | Compatible devices (see list)
- 2 | In-house WLAN or Wi-Fi internet connection
- 3 | Smartphone or tablet with internet connection

### Compatible devices:

- Aquarea Air Smart fan coils (via Wi-Fi or Modbus <sup>1)</sup>)
- Aquarea Loop (via Wi-Fi or Modbus <sup>1)</sup>)
- Aquarea Vent (via Wi-Fi or Modbus <sup>1)</sup>)
- RAC Solo (via Wi-Fi or Modbus <sup>1)</sup>)
- Aquarea Heat Pumps (require connection of the Home Network Hub PCZ-ESW737 via the CN-CNT port)

<sup>1)</sup> Aquarea room solutions a remote control with Wi-Fi connection or Aquarea Home Network Hub PCZ-ESW737. Aquarea Heat Pumps require PCZ-ESW737 connected to the CN-CNT port.

## Download free app: Aquarea Home App.

Other hardware requirements: Router and Internet (purchase and subscribe separately). Panasonic Cloud Server is designed, operated and managed by Panasonic.



Aquarea Home



GET IT ON  
App Store

GET IT ON  
Google Play

# Panasonic Comfort Cloud App

A powerful and intuitive app designed to manage and monitor your Panasonic heat pumps from anywhere, 24/7. With energy monitoring features, it helps reduce operational costs while ensuring your desired comfort.



Comfort Cloud

\* Requires Wi-Fi adapter CZ-TAW1B or CZ-TAW1C.



Remote control.



Weekly timer.



Monitor energy consumption.






Enables Aquarea Service Cloud for remote maintenance.

## Comfort management, anytime, anywhere.

Easily control heating, cooling, and DHW settings through an intuitive interface, maximising energy savings and comfort.

- Control of up to 2 heating zones (ON / OFF, temperature setting, mode selection, DHW setting)
- Optimised scheduling with weekly timer

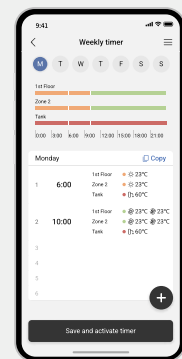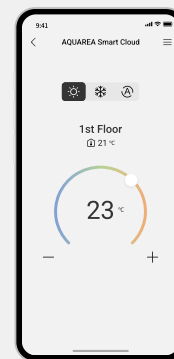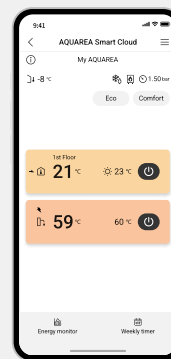

## Easy and powerful energy management.

Monitor and optimise your heat pump's energy usage to balance comfort and efficiency.

- Track energy consumption for space heating, cooling and domestic hot water
- Daily, weekly and yearly energy visualisation monitor energy recovery for domestic hot water production with Aquarea EcoFlex



## Further peace of mind.

Ensure your Aquarea Heat Pump is always under control.

- Enables remote maintenance via the Aquarea Service Cloud, managed by service partners
- Notification in case of malfunction

## Requirements for connecting with Panasonic Comfort Cloud App

- 1 | Aquarea H Series or later
- 2 | Cloud adapter CZ-TAW1, CZ-TAW1B or CZ-TAW1C connected via the CN-CNT port. Included in M and L Series, and EcoFlex. For other series, it needs to be purchased separately.
- 3 | In-house WLAN or Wi-Fi internet connection
- 4 | Smartphone or tablet with internet connection

## Download free app: Panasonic Comfort Cloud App.

Other hardware requirements: Router and Internet (purchase and subscribe separately). Panasonic Cloud Server is designed, operated and managed by Panasonic.



Comfort Cloud



Download on the App Store



GET IT ON Google Play

# Aquarea Service Cloud

With the Aquarea Service Cloud, installers can remotely take care of their customers' heating systems. It saves time and money and shortens the response time, thus increasing the customers' satisfaction.



WATCH DEMO

The real remote maintenance made simple: Global view at a glance, heat pump information and settings, error log history and statistics always available.




### Time and cost saving.

Remote system adjustment. Remote diagnosis. One visit, spare part in hand.



### Increased customer satisfaction.

Faster service. Time saving (less number of visits).

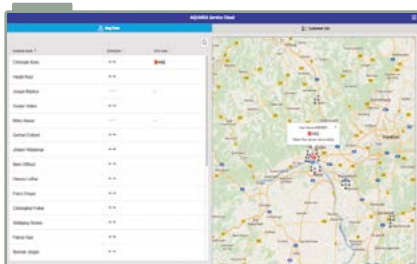

**Home page.**  
Status of connected users at a glance. 2 view options: map view or list view.



**Status tab.**  
Current status of unit with a maximum 28 parameters.




**Statistics tab.**  
Customisable statistics of a maximum of 71 parameters. Available anytime with the information of the last 7 days.



**Settings tab.**  
Most of the user and installer settings can be done remotely.

## Connecting an Aquarea heat pump to the Aquarea Service Cloud

The process can be initiated by the end user or by the installer.  
The end user can select and change the installer's level of control anytime (4 levels).

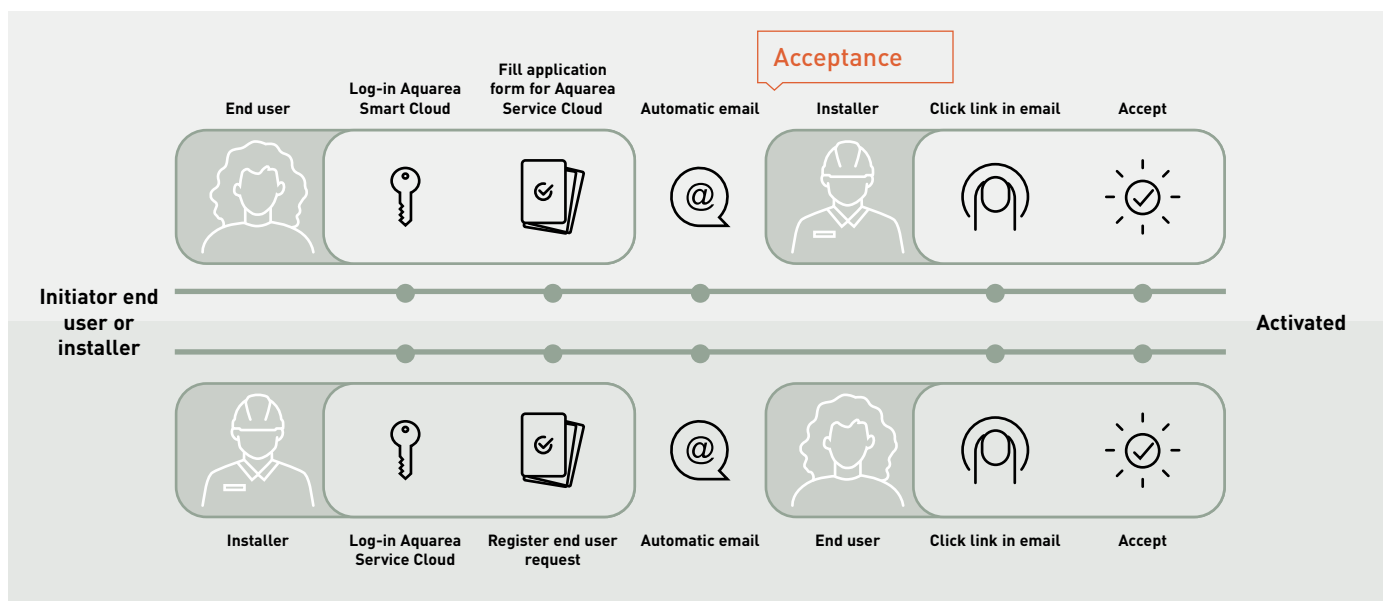

### Requirements:

- 1 | End user: Aquarea Heat Pump connected to the Panasonic Comfort Cloud App
- 2 | Installer/maintenance company: Service ID. Installer registration: <https://aquarea-service.panasonic.com/>



# Aquarea Heat Pumps + tado°, the integrated solution for maximum energy savings and comfort

tado° | Panasonic

Partnership for smart heat pump solutions

tado° X enables room control and smart energy management services.



**Easy installation.**  
Intuitive system selection.  
Offline installation possible.



**Future-proof solution.**  
Further efficiency gains via  
planned software updates.



**Advanced energy savings.**  
With the individual room  
temperature control.



**Reliable and trustworthy.**  
Guaranteed and optimised  
interoperability.

## A smart solution for maintaining the perfect temperature in your home.




**tado° Heat Pump Optimizer X.**  
Connecting to Aquarea Heat Pumps and enabling multi-room control and loadshifting.



**tado° app and Balance for Heat Pumps\*.**  
Multi-Room Control, scheduling and energy insights in one market leading app.

\* Requires additional subscription.

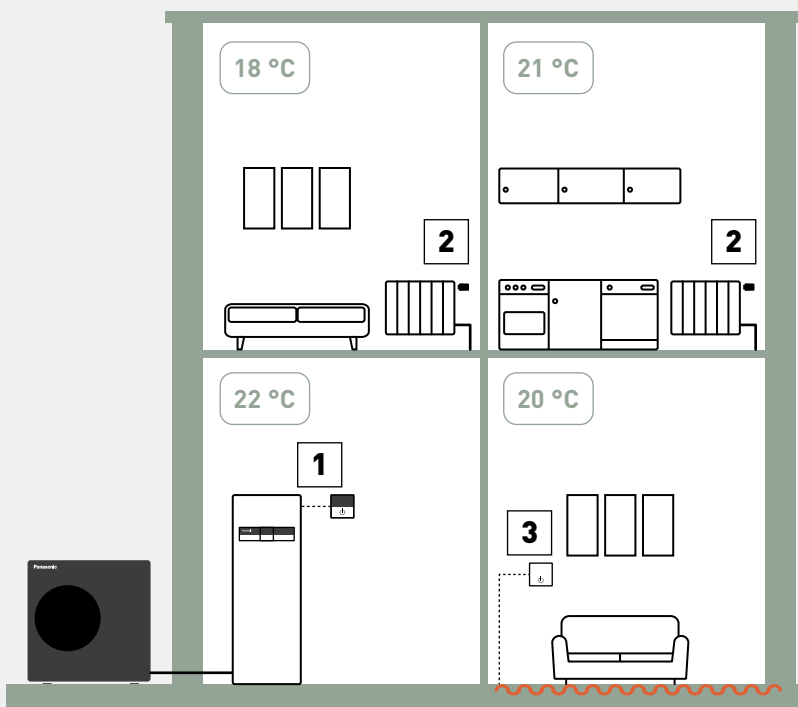

**matter**



**tado° Smart Radiator Thermostat X.**  
For radiator control.



**tado° Wired Smart Thermostat X.**  
For underfloor heating control.

Save energy with smart heating.

By joining forces, Panasonic and tado° are developing specially tailored auto-control software and new services for Panasonic's Aquarea air to water heat pumps, which provides a variety of customers with differentiating values such as further comfort and energy savings.

+ MORE TADO° OPTIONS IN ACCESSORIES SECTION

tado° X at a glance.



tado° Heat Pump Optimizer X and Balance for Heat Pumps.

Intelligent heating control optimised for Aquarea Heat Pumps, reducing energy use while optimizing comfort. When paired with Smart Thermostats, the heat pump synchronises with each room's needs. The optional Balance subscription maximizes savings by unlocking additional optimisations based on outdoor temperatures, dynamic energy tariffs, and your private PV system.

tado° Room Control.

Save energy, save money, and stay comfortable everywhere. tado° Smart Thermostats simply replace the radiator thermostats or wall thermostats in your home and let you control your heating room by room in one easy-to-use app. Set individual schedules to suit your routines while saving energy by allowing direct feedback from the single rooms to your heat pump. No more overshooting, no more wasting energy.

1) Requires the tado° Heat Pump Optimizer X, the tado° Bridge X or another Thread border router.  
2) Not required with a Heat Pump Optimizer X or another Thread border router.

tado° Room control sets with Heat Pump Optimizer X	
<b>KIT-TSRTXHPOXE</b>	Set of tado° Heat Pump Optimizer X and 1x Smart Radiator Thermostat X
<b>KIT-TSRTX4HPOXE</b>	Set of tado° Heat Pump Optimizer X and 4x tado° Smart Radiator Thermostat X
<b>KIT-TSTXHPOXE</b>	Set of tado° Heat Pump Optimizer X and 1x Smart Thermostat X
<b>KIT-TSTXSRTX2HPOXE</b>	Set of tado° Heat Pump Optimizer X and 1x Smart Thermostat X and 2x Smart Radiator Thermostat X

tado° Room control sets with Bridge X	
<b>PAW-TSRTXB</b>	tado° Smart Radiator Thermostat X with Bridge X
<b>PAW-TSTXB</b>	tado° Smart Thermostat X with Bridge X
<b>PAW-TSTXSRTX2B</b>	Set of 1x Smart Thermostat X, 2x Smart Radiator Thermostat X and 1x Bridge X
tado° X devices	
<b>PAW-THPOXE</b>	tado° Heat Pump Optimizer X (with Europlug)
<b>PAW-TSTX</b>	tado° Smart Thermostat X
<b>PAW-TSRTX</b>	tado° Smart Radiator Thermostat X
<b>PAW-TSRTX4</b>	4x tado° Smart Radiator Thermostat X
<b>PAW-TWTSX</b>	tado° Wireless Temperature Sensor X
<b>PAW-TBX</b>	tado° Bridge X

The tado° app.

Intuitive smart heating technology with Geofencing, Open Window Detection, Multi-Room Control, and offline Smart Schedules. Subscription to additional services, such as Balance for Heat Pumps or tado° Auto-Assist, is available for further energy savings and enhanced transparency over energy consumption.



12-month free subscription to Balance for Heat Pumps\*.

\* With the purchase of PAW-THPOXE or PAW-THPOXUK. This promotion is subject to change without notice.



# Control for Aquarea Heat Pumps

Aquarea Heat Pumps offer a variety of control options.

## Advanced remote controller

**Aquarea remote controller is designed in harmony with the whole system, with optimised user interface and improved features.**

The remote controller can be removed from the indoor unit and installed in the living room.

### K, L and M Series remote controller.

Dual controller system: A dual controller system for independent control of two zones within the home (requires additional remote controller CZ-RTW2 for M Series or CZ-RTW1 for K and L Series).



	K, L and M Series				H and J Series	
	Main controller		Sub controller		Main controller	
Quick menu	✓		✓		✓	
User menu	✓		✓		✓	
Installer / custom menu	✓		—		✓	
Maintenance menu	✓		—		✓	
Error reset	✓		✓		✓	
Internal thermostat	✓ Zone 1	✓ Zone 2	✓ Zone 1	✓ Zone 2	✓ Zone 1	✓ Zone 2

### Installer functions:

System setup, operation setup (including heating / cooling modes,  $\Delta T$  setup), dry concrete mode and cost-effective bivalent mode\*, among others.

\* Only for K, L and M Series.

### End user functions:

Mode selection (including auto, powerful and quiet modes), weekly timer and energy monitoring, among others.

## PCBs for additional functions

**CZ-NS4P: H and J Series.**

**CZ-NS5P: K and L Series.**

**CZ-NS6P: M Series All in One and Bi-bloc.**

**CZ-NS7P: M Series control module.**

The optional PCB enables additional control functions for Aquarea Heat Pumps.

Functions available through the connection of the Optional PCB to the Main PCB:

- 2-zone control, with 2 mixing valves, 2 pumps and 2 room thermostats or sensors
- Control of swimming pool
- Solar thermal control
- External error signal output
- 0-10 V signal for heat pump demand control
- SG Ready <sup>1)</sup>
- Stop compressor by external compressor switch
- Switch heating and cooling by external heat-cool switch

<sup>1)</sup> Aquarea H and J Series heat pumps in combination with the optional PCB CZ-NSP4 hold the SG Ready Label (Smart Grid Ready Label), given by Bundesverband Wärmepumpe (German Heat Pump Association). This Label shows the real capacity of Aquarea to be connected in an intelligent grid control.



# Connectivity

Home Management Systems allow centralized control of all house devices, optimizing operation and costs. Panasonic interfaces support KNX and Modbus protocols. For non-integrated control, Panasonic offers a simple connection to wireless LAN, enabling remote control of heat pumps.

## Control by BMS

**Modbus: PAW-AW-MBS-H <sup>1)</sup> (Intesis) and PAW-AZAW-MBS-M (Airzone).**  
**KNX: PAW-AW-KNX-H <sup>1)</sup> (Intesis) and PAW-AZAW-KNX-1 (Airzone).**

Great flexibility for integration into your KNX / Modbus projects allows fully bi-directional monitoring and control of all the functioning parameters.

- Quick installation
- Direct connection to the unit via CN-CNT connector
- Bidirectional control
- Unit can be controller simultaneously by remote controller and the gateway
- Compatible with H Series onwards
- PAW-AW-MBS-H and PAW-AW-KNX-H don't require external power supply

<sup>1)</sup> Compatible with H and J Series. \* For specific functionality list of each gateway, please check the user's manual.



## NEW Modbus PCB for Aquarea M Series

### CZ-NSMB

The Modbus PCB can be installed in Aquarea M Series units for seamless connectivity.

Compatible with:

- Bi-bloc M Series indoor units: WH-SDC0916M3E5, WH-SDC0916M6E5 and WH-SDC0316M9E8
- Control Module M Series: WH-CME8 and WH-CME8L
- Big Aquarea T-CAP M Series outdoor unit: WH-WXG20ME8, WH-WXG25ME8 and WH-WXG30ME8



## External meter gateway

### PAW-A2W-EXTMETER

- Energy consumption and production from external Modbus RTU meters
- Real values visualized via Aquarea remote controller and Aquarea Smart Cloud
- Compatible with Aquarea K Series onwards




#### Possibility to mix internal calculation and external meters

Configuration	Electricity meter (HP)	Heat meter (heating and cooling)	Heat meter (DHW)
Only external meters	External	External	External
Only external consumption meter	External	Internal calculation	Internal calculation
Only external production meters (2 meters)	Internal calculation	External	External
Only external production meter (single meter for total production)	Internal calculation	External	Internal calculation

#### Functions:

- Configuration via App (iOS and Android™) using Bluetooth®
- Easy to setup thanks to templates for some meters manufacturers
- Configuration can be done before and just send it on commissioning

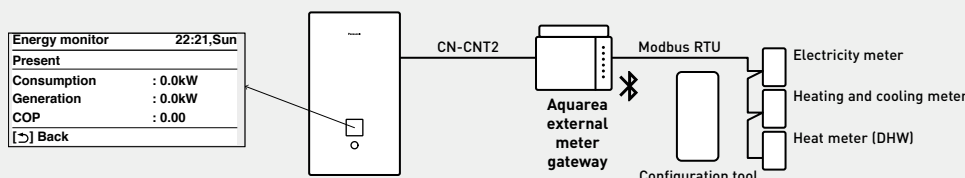




## Cascade manager

Designed for central heating projects, small hotels, supermarkets and restaurants, the cascade manager manages the demand for energy-efficient heating and cooling balancing working hours.



### Up to 10 heat pumps (up to 300 kW)

- Cascade up to 10 units
- Heating and cooling control
- Domestic hot water (DHW) control
- Management up to 75 °C (L or M Series)
- Provides total energy consumption and generation
- All components in one case
- BMS integration

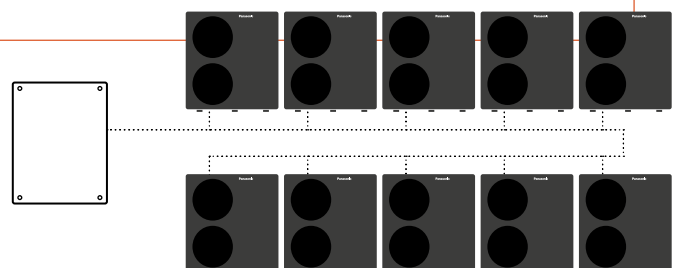

## New cascade manager

### PAW-A2W-CMH-3

Cascade up to 10 heat pumps, getting up to 300 kW, with a large, easy-to-use touch screen display, providing intuitive control.

- Photovoltaics integration (PV optimised algorithm)
- Control of 3 way valves for cooling (2 buffer tanks)
- Heating/cooling 0-10 V demand signal – controls target outlet temperature
- Energy meters compatibility
  - Meters communication with Modbus RTU
  - Pre-configuration of 4 market popular meters
- BMS integration via Modbus TCP
- Working mode: entire system in heating/cooling or DHW by priority



### Compatible with Aquarea Heat Pumps from H Series onwards <sup>1)</sup>.

<sup>1)</sup> Requires 1 CZ-NSMB or 1 PAW-AZAW-MBS-M per each Aquarea Heat Pump.

## New Aquarea Cascade Edge

### PAW-A2W-CME4 and PAW-A2W-CME10

Cascade up to 4 or 10 Aquarea Heat Pumps, also in combination with ECOi-W AQUA chillers and heat pumps, and get up to 750 kW <sup>1)</sup>. Remotely control your units with a local web visualization via smartphone, tablet or PC.

- Local web visualization of the cascade controller
- Easy connection with smartphone, tablet or PC thanks to the Wi-Fi access point on the device
- 2 possible online management solutions:
  - P-Smart Nexus: easy access and global visualization of all your sites
  - Via customer VPN or MyDNS configuration
- Data ownership thanks to local data storage (no cloud storage)
- BMS Integration via BACnet IP
- Smaller buffer tank or smaller capacity unit thanks to 2 possible logic working modes
  - Possibility to combine all the heat pumps between heating/cooling and DHW, providing both simultaneously
  - Entire system in heating/cooling or DHW by priority
- Configuration wizard with default values



### Compatible with Aquarea Heat Pumps from H Series onwards <sup>2)</sup>.

<sup>1)</sup> Maximum capacity combining 1 Aquarea (main) + 9 ECOi-W AQUA-G BLUE 80 kW (sub unit). <sup>2)</sup> Requires 1 CZ-NSMB or 1 PAW-AZAW-MBS-M per each Aquarea Heat Pump.

	PAW-A2W-CMH-3	PAW-A2W-CME4	PAW-A2W-CME10
Cascade up to number of heat pumps	Up to 10	Up to 4	Up to 10
Management of heat demand, balancing working hours	✓	✓	✓
Integration of photovoltaics (PV optimised algorithm)	✓	—	—
Connectable buffer tank	2 tanks	1 tank	1 tank
Heating/cooling 0-10 V demand signal	✓	—	—
BMS integration	Modbus TCP	BACnet IP	BACnet IP
Built-in touch screen display	✓	—	—
Management via smartphone, tablet or PC	—	✓	✓
Remote monitoring via P-Smart Edge	—	✓	✓
Multi-site control via P-Smart Nexus	—	✓	✓
Data statistics visualization	—	✓	✓


# P-Smart Edge for Aquarea Cascade Edge

Complete and remote centralized control of your Aquarea cascade system.




**P-Smart Edge.**

Control and monitoring solution for Aquarea cascade systems wherever you are. In a simple click, configure and receive status updates of all your units.

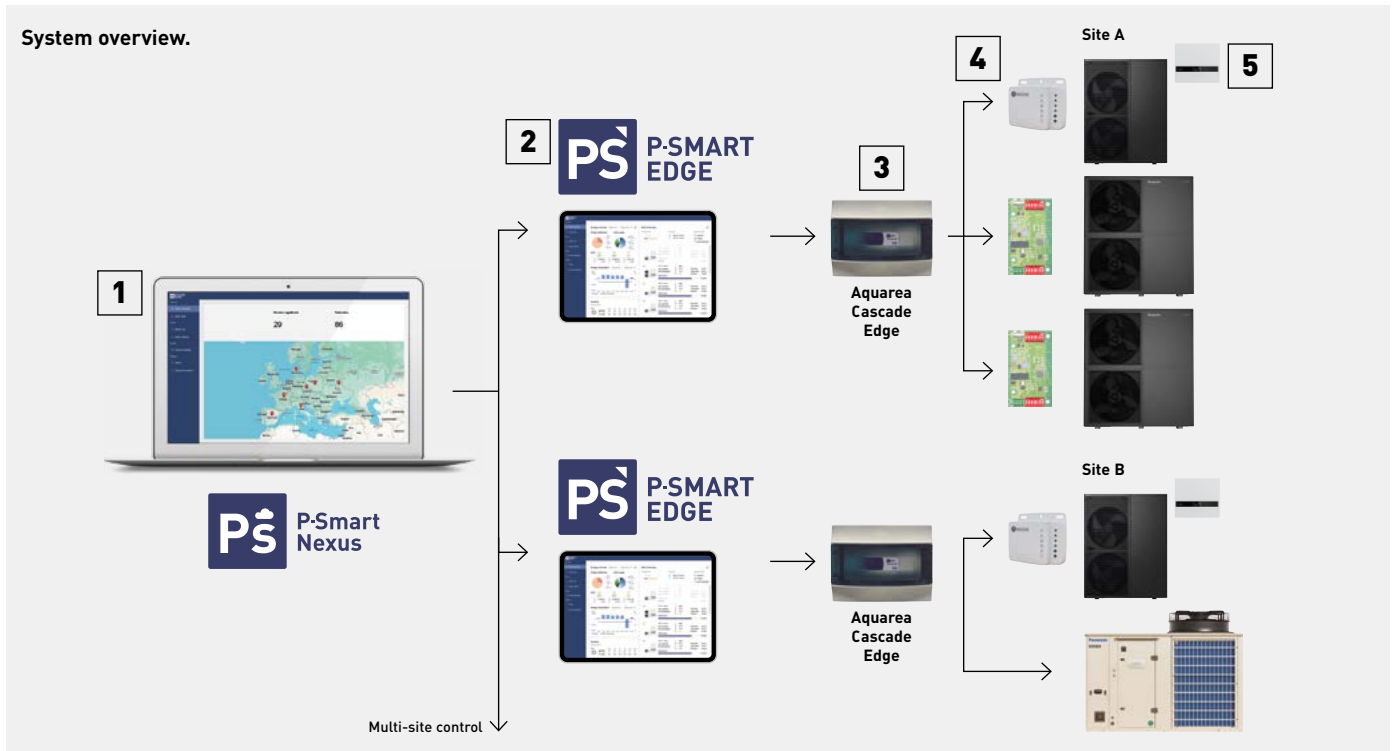

**1 P-Smart Nexus.**  
Smart multi-site control which allows a remote global supervision of all your sites. Control your different installations wherever you are, with easy on-site network setup.



**2 P-Smart Edge.**  
Control and monitoring solution for Aquarea cascade systems, even outside your installation site.



**3 Aquarea Cascade Edge.**  
PAW-A2W-CME4 and PAW-A2W-CME10.



**4 Modbus interface.**  
Requires 1 CZ-NSMB or 1 PAW-AZAW-MBS-M per each Aquarea Heat Pump.



**5 Aquarea cascade system.**  
Main unit: control module or Bi-bloc mandatory + optional PCB.  
Sub units: remote controller needed. Possibility of combination with other Panasonic commercial products (ECOi-W AQUA chillers and heat pumps).

\* Check availability for chiller connection.

**Advantages**



**Powerful remote management with user-friendly interface.**

- Simple and intuitive home screen with: Plant overview, energy overview, DHW status and buffer and zone list
- Alarm status and history
- 3 different user profiles: facility manager, installer and maintenance
- Online visualization, no installation of any specific software is required



**Remote configuration of the technical parameters.**  
Possible configuration of:

- Installation settings
- Sterilisation configuration (schedule)
- Outdoor units silence mode (schedule)
- Bivalent
- SG Ready
- COP ranking



**Historical system data.**

- Graphs and data showing the energy overview related to periods of 7 days or 8 hours
- Data stored for up to 2 years



**P-Smart Nexus: smart multi-site remote management.**

- Remote global supervision of all your sites in one place
- 24/7 control of all the installations
- Easy connection to Aquarea Cascade Edge without special on-site network setup
- 3-year subscription from the start-up included
- Online visualization, no installation of any specific software is required

Note: User interface design may vary.



# How Panasonic contributes to Nearly Zero Energy Buildings (nZEB)

Our expertise gained over the years has helped to launch a range of products that contribute to a more carbon-free society.

## Panasonic is committed to develop products with greater energy efficiency.

Highly efficient Panasonic solutions can help to significantly reduce the energy consumption of the house, at the same time a high level of comfort and good indoor air quality are kept.

- Aquarea High performance heat pump for heating, cooling and domestic hot water production
- Aquarea Smart Cloud, for energy monitoring
- Heat recovery ventilation system
- PV panels to produce renewable energy on-site



## Aquarea Heat Pumps and the ventilation unit with heat recovery certified as Passive House Component

Aquarea High Performance K and L Series heat pumps and the residential ventilation units have been certified by the Passive House Institute (PHI) as Passive House Component. This certification ensures highly energy efficient components according to international criteria for respective thermal performance, comfort and indoor air quality.

Certified models can be checked under the certification section of <https://database.passivehouse.com>.




### H3 Grande Passive House, Poland.

When looking for a energy-efficient heating solution, Polish construction company Procyon selected a 5 kW Panasonic Aquarea High Performance heat pump for its passive house project, H3 Grande. Procyon found this solution reduced annual heating expenses by almost half compared to an oil-based system, or by 10% in comparison to natural gas.

H3 Grande is a 175 m<sup>2</sup> detached house certified by the Passive House Institute (PHI) in Darmstadt. It is designed to minimise energy losses while incorporating an attractive, yet simple aesthetic. The building's shape, interior design and pitched roof contribute to the energy balance of the house, while large south-facing windows and wall insulation provide passive thermal comfort by retaining heat. The building has very low heating demand of approximately 15 W/m<sup>2</sup> and is designed to minimise energy.

## Aquarea and PV integration

Aquarea Heat Pumps are designed with the future in mind. Thanks to the integration of the Aquarea Heat Pumps with PV, the demand or power consumption for heating, cooling and domestic hot water production is adapted to the PV production.



**Savings on heat pump running costs.**



**Reduced primary energy consumption.**



**Lower CO<sub>2</sub> emissions.**




**Maximised comfort.**

### Aquarea Heat Pumps can be integrated with PV thanks to the optional PCB <sup>1)</sup>

With the SG Ready function, the Aquarea Heat Pumps will be able to store thermal energy during periods where the electricity produced is higher than the demand in the house. These are some examples:

1. Store DHW at higher temperature. Aquarea M and L Series can produce DHW at 65 °C up to 40% more tap water
2. Heat or cool the house to maintain a comfortable temperature continuously. This requires less energy during the off-peak production hours
3. Store thermal energy in a buffer tank

1) CZ-NS\*P. Check the model reference by Series in the control for Aquarea Heat Pumps section.

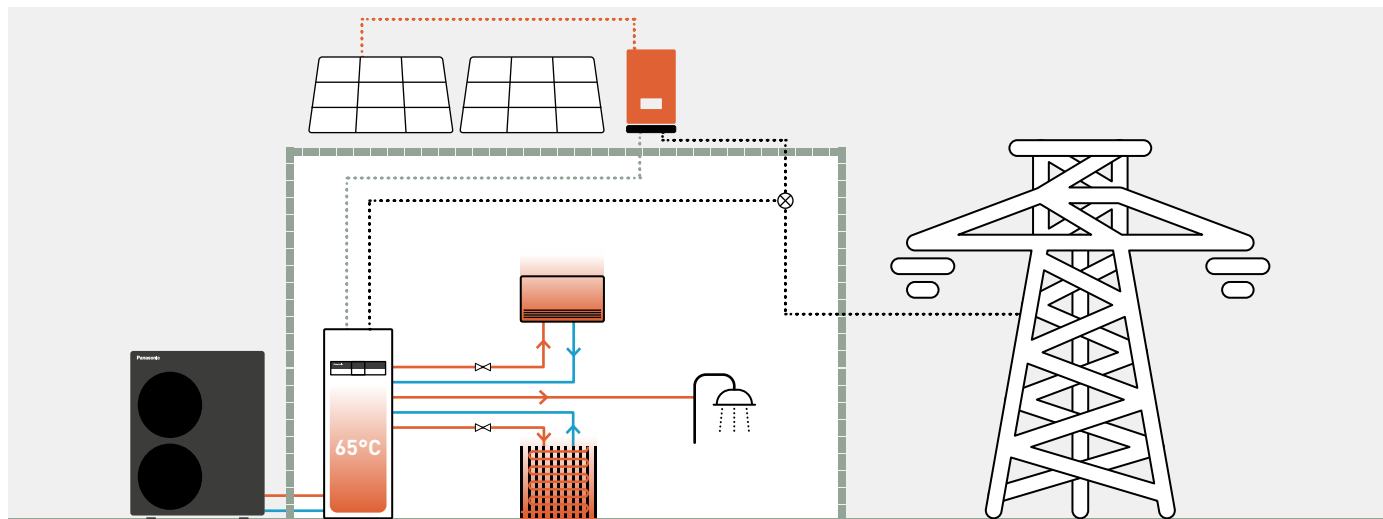

### Turning a family home into an energy-neutral house.

Installer Sinne Technyk chose the Aquarea T-CAP heat pump in combination with HIT KURO photovoltaic panels for a house in Oudemirdum in Friesland, the Netherlands. With this combination, the household enjoys energy-neutral and free heating and hot water, as well as a more comfortable indoor climate. "The aim was to create an energy-neutral house and to reduce gas consumption to zero," explains Leo van der Molen of Sinne Technyk. "This makes a heat pump an interesting option". With the comfort of customers and neighbours in mind, a silent Aquarea T-CAP heat pump was chosen, powered by 24 Panasonic HIT KURO solar panels of 325 Wp each.

# Aquarea design tools to make your life easier


Discover the suite of Aquarea design tools crafted to streamline your professional workflow on Aquarea projects. These resources are designed to make your planning process more efficient and effective.



## Aquarea Designer – online tool

With Panasonic's Aquarea Designer - online tool, projects can be developed simply and easily. The newly developed air to water design tool is optimised to help HVAC professionals easily identify the most appropriate Aquarea air-to-water heat pump for a particular application, to calculate the savings compared to other heat sources and to calculate CO<sub>2</sub> emissions very quickly. The system can produce a Heat Pump Design Report which includes:

- Customer and general project information
- Heating system specific data
- Heat pump dimensioning, including information about the chosen Panasonic heat pump
- Calculated energy demand and performance factors
- CO<sub>2</sub> savings by the different energy sources
- Comparison of yearly operational or economic costs (optional)

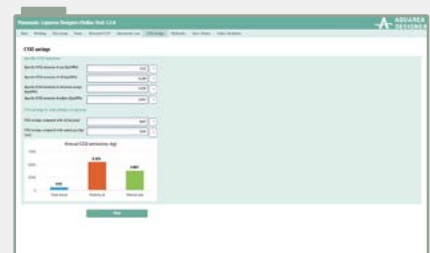

All the support tools are available in Panasonic PRO Club ([www.panasonicproclub.com](http://www.panasonicproclub.com)).

Among many others, these are the main tools for the design of Aquarea projects.





## Hydraulic scheme generator

The Aquarea Hydraulic Scheme Generator (HSG) allows users to select a hydraulic schematic according to their installation requirements. This will be accompanied by the relevant electrical connection schematic and component list.


The latest features and upgrades include:

- A modern user interface
- Accessory model choice selection
- Expanded buffer tank options
- Additional refrigerant and hydraulic specification details

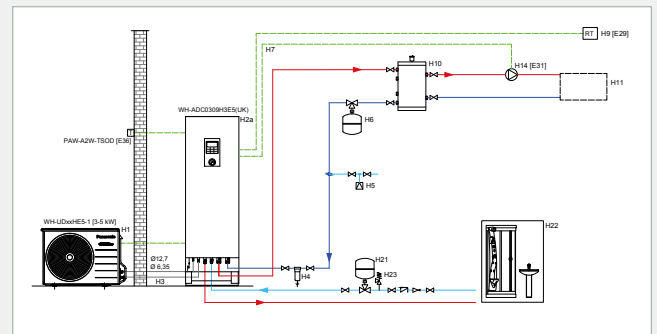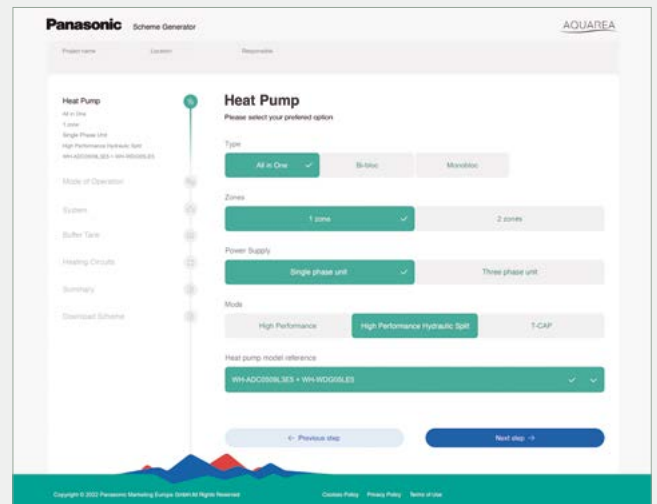

## Vent PRO

From selecting the right ventilation unit to planning the air distribution system and choosing the appropriate components, the Vent PRO guides you through every step to ensure the optimal solution for your project.

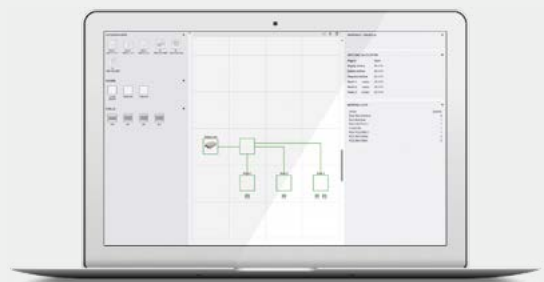

## Heating demand calculator

This software can quickly and easily determine the heating requirements for the rooms in a project. The Heating demand calculator will help determine approximately how much power is needed to heat each room individually. The result in kilowatts will help you choose the space heater best suited to your needs.


## CAD images and spec texts

In order to add value in the design of projects, Panasonic has a wide library of 2D CAD, BIM objects (Building Information Modeling) and Spec texts to be used in Revit.

Try the new Panasonic Augmented Reality projector.



Helping you to find the Aquarea Heat Pumps for your home in just a few clicks!





# Aquarea Hydraulic

Aquarea High Performance	5 kW	7 kW	9 kW	12 kW	16 kW
<b>P. 70 , 72</b> <b>All in One</b> <b>· R290</b> <b>1ph - 3ph</b>	 <b>NEW</b> WH-ADC0509L3E51 <sup>1)</sup> WH-ADC0509L3E5AN1 <sup>1)</sup>  WH-ADC0509L3E5 <sup>3)</sup> WH-ADC0509L3E5B WH-ADC0509L3E5AN <sup>3)</sup> WH-WDG05LE5	 <b>NEW</b> WH-ADC0509L3E51 <sup>1)</sup> WH-ADC0509L3E5AN1 <sup>1)</sup>  WH-ADC0509L3E5 <sup>3)</sup> WH-ADC0509L3E5B WH-ADC0509L3E5AN <sup>3)</sup> WH-WDG07LE5	 <b>NEW</b> WH-ADC0509L3E51 <sup>1)</sup> WH-ADC0509L3E5AN1 <sup>1)</sup>  WH-ADC0509L3E5 <sup>3)</sup> WH-ADC0509L3E5B WH-ADC0509L3E5AN <sup>3)</sup> WH-WDG09LE5	 <b>NEW</b> WH-ADC0916M3E51 <sup>2)</sup> WH-ADC0916M3E5AN1 <sup>2)</sup> WH-ADC0916M3E52 <sup>3)</sup> WH-ADC0916M3E5AN2 WH-ADC0916M3E53 <sup>3)</sup> WH-ADC0916M3E5AN3 WH-ADC0316M9E82 WH-ADC0316M9E8AN2 WH-ADC0316M9E83 WH-ADC0316M9E8AN3 WH-WDG12ME5 <sup>2)</sup>	 <b>NEW</b> WH-ADC0916M3E51 <sup>2)</sup> WH-ADC0916M3E5AN1 <sup>2)</sup> WH-ADC0916M3E52 <sup>3)</sup> WH-ADC0916M3E5AN2 WH-ADC0916M3E53 <sup>3)</sup> WH-ADC0916M3E5AN3 WH-ADC0316M9E82 WH-ADC0316M9E8AN2 WH-ADC0316M9E83 WH-ADC0316M9E8AN3 WH-WDG16ME5 <sup>2)</sup>
	 WH-SDC0509L3E5 <sup>3)</sup> WH-WDG05LE5	 WH-SDC0509L3E5 <sup>3)</sup> WH-WDG07LE5	 WH-SDC0509L3E5 <sup>3)</sup> WH-WDG09LE5	 <b>NEW</b> WH-SDC0916M3E5 <sup>1)3)</sup> WH-SDC0316M9E8 WH-WDG12ME5 <sup>2)</sup>	 <b>NEW</b> WH-SDC0916M3E5 <sup>1)3)</sup> WH-SDC0316M9E8 WH-WDG16ME5 <sup>2)</sup>
<b>P. 72</b> <b>Control module</b> <b>· R290</b> <b>1ph - 3ph</b>				 <b>NEW</b> WH-CME5 WH-CME8 WH-WDG12ME5 <sup>2)</sup>	 <b>NEW</b> WH-CME5 WH-CME8 WH-WDG16ME5 <sup>2)</sup>
	 <b>NEW</b> WH-WDG12ME5 <sup>2)</sup>	 <b>NEW</b> WH-WDG16ME5 <sup>2)</sup>			
<b>P. 74</b> <b>Mono-bloc</b> <b>· R32</b> <b>1ph</b>	 WH-MDC05J3E5	 WH-MDC07J3E5	 WH-MDC09J3E5		

Models with R290 refrigerant. Models with R32 refrigerant.  
 1) Available Spring 2025. 2) Available in Autumn 2025. 3) Also available with other backup heater capacities. 4) Requires CZ-RTW2TAW1C.  
 WH-\_\_E5 1ph // WH-\_\_E8 3ph.WH-\_\_E5 1ph // WH-\_\_E8 3ph.

Aquarea T-CAP      9 kW      12 kW      16 kW      20 kW      25 kW      30 kW



P. 76 ,  
78

**All in One**  
• R290  
1ph - 3ph



- |  |  |   |
|--|--|---|
| <b>NEW</b><br>WH-ADC0916M3E51 <sup>2)</sup><br>WH-ADC0916M3E5AN1 <sup>2)</sup><br>WH-ADC0916M3E52 <sup>3)</sup><br>WH-ADC0916M3E5AN2<br>WH-ADC0916M3E53 <sup>3)</sup><br>WH-ADC0916M3E5AN3<br>WH-ADC0316M9E82<br>WH-ADC0316M9E8AN2<br>WH-ADC0316M9E83<br>WH-ADC0316M9E8AN3<br>WH-WXG09ME5<br>WH-WXG09ME8 | <b>NEW</b><br>WH-ADC0916M3E51 <sup>2)</sup><br>WH-ADC0916M3E5AN1 <sup>2)</sup><br>WH-ADC0916M3E52 <sup>3)</sup><br>WH-ADC0916M3E5AN2<br>WH-ADC0916M3E53 <sup>3)</sup><br>WH-ADC0916M3E5AN3<br>WH-ADC0316M9E82<br>WH-ADC0316M9E8AN2<br>WH-ADC0316M9E83<br>WH-ADC0316M9E8AN3<br>WH-WXG12ME5<br>WH-WXG12ME8 | <b>NEW</b><br>WH-ADC0316M9E82<br>WH-ADC0316M9E8AN2<br>WH-ADC0316M9E83<br>WH-ADC0316M9E8AN3<br>WH-WXG16ME8 |
|--|--|---|



P. 76 ,  
78

**Bi-bloc**  
• R290  
1ph - 3ph



- |  |  |   |
|--|--|---|
| <b>NEW</b><br>WH-SDC0916M3E5 <sup>3)</sup><br>WH-SDC0316M9E8<br>WH-WXG09ME5<br>WH-WXG09ME8 | <b>NEW</b><br>WH-SDC0916M3E5 <sup>3)</sup><br>WH-SDC0316M9E8<br>WH-WXG12ME5<br>WH-WXG12ME8 | <b>NEW</b><br>WH-SDC0316M9E8<br>WH-WXG16ME8 |
|--|--|---|



P. 76 ,  
78

**Control module**  
• R290  
1ph - 3ph



- |  |  |                                      |                                       |                                       |                                       |
|--|--|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| <b>NEW</b><br>WH-CME5<br>WH-CME8<br>WH-WXG09ME5<br>WH-WXG09ME8 | <b>NEW</b><br>WH-CME5<br>WH-CME8<br>WH-WXG12ME5<br>WH-WXG12ME8 | <b>NEW</b><br>WH-CME8<br>WH-WXG16ME8 | <b>NEW</b><br>WH-CME8L<br>WH-WXG20ME8 | <b>NEW</b><br>WH-CME8L<br>WH-WXG25ME8 | <b>NEW</b><br>WH-CME8L<br>WH-WXG30ME8 |
|--|--|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|



P. 76 ,  
78

**Stand-alone**  
• R290 <sup>4)</sup>  
1ph - 3ph



- |  |  |                           |                           |                           |                           |
|--|--|---------------------------|---------------------------|---------------------------|---------------------------|
| <b>NEW</b><br>WH-WXG09ME5<br>WH-WXG09ME8 | <b>NEW</b><br>WH-WXG12ME5<br>WH-WXG12ME8 | <b>NEW</b><br>WH-WXG16ME8 | <b>NEW</b><br>WH-WXG20ME8 | <b>NEW</b><br>WH-WXG25ME8 | <b>NEW</b><br>WH-WXG30ME8 |
|--|--|---------------------------|---------------------------|---------------------------|---------------------------|

P. 80

**Mono-bloc**  
• R32  
1ph - 3ph



- |                              |                              |              |
|------------------------------|------------------------------|--------------|
| WH-MXC09J3E5<br>WH-MXC09J3E8 | WH-MXC12J6E5<br>WH-MXC12J9E8 | WH-MXC16J9E8 |
|------------------------------|------------------------------|--------------|

Models with R290 refrigerant. Models with R32 refrigerant.

1) Available Spring 2025. 2) Available in Autumn 2025. 3) Also available with other backup heater capacities. 4) Requires CZ-RTW2TAW1C.

WH-\_\_E5 1ph // WH-\_\_E8 3ph.

# Aquarea Split

## Aquarea EcoFlex

8 kW

P. 81 1ph



WH-ADF0309J3E5CM  
S-71WF3E  
CU-2WZ71YBE5

## Aquarea High Performance

3 kW

5 kW

7 kW

9 kW

12 kW

16 kW

P. 82,  
83,  
84,  
85,  
86,  
87,  
88,  
89

All in One  
· R32  
1ph - 3ph



WH-ADC0309K3E5 <sup>1)</sup>  
WH-ADC0309K3E5B  
WH-ADC0309K3E5AN <sup>1)</sup>  
WH-UDZ03KE5

WH-ADC0309K3E5 <sup>1)</sup>  
WH-ADC0309K3E5B  
WH-ADC0309K3E5AN <sup>1)</sup>  
WH-UDZ05KE5

WH-ADC0309K3E5 <sup>1)</sup>  
WH-ADC0309K3E5B  
WH-ADC0309K3E5AN <sup>1)</sup>  
WH-UDZ07KE5

WH-ADC0309K3E5 <sup>1)</sup>  
WH-ADC0309K3E5B  
WH-ADC0309K3E5AN <sup>1)</sup>  
WH-UDZ09KE5

**NEW**  
WH-ADC0912K9E8  
WH-ADC0912K9E8AN  
WH-ADC0912K9E83  
WH-ADC0912K9E8AN3  
WH-UDZ09KE8

WH-ADC0912K6E5  
WH-ADC0912K6E5AN  
WH-ADC0912K6E53  
WH-ADC0912K6E5AN3  
WH-UDZ12KE5

**NEW**  
WH-ADC0912K9E8  
WH-ADC0912K9E8AN  
WH-ADC0912K9E83  
WH-ADC0912K9E8AN3  
WH-UDZ12KE8

**NEW**  
WH-ADC16K9E8  
WH-ADC16K9E8AN  
WH-ADC16K9E83  
WH-ADC16K9E8AN3  
WH-UDZ16KE8

WH-ADC16K6E5  
WH-ADC16K6E5AN  
WH-ADC16K6E53  
WH-UDZ16KE5

P. 90,  
91

Bi-bloc  
· R32  
1ph - 3ph



WH-SDC0309K3E5 <sup>1)</sup>  
WH-UDZ03KE5

WH-SDC0309K3E5 <sup>1)</sup>  
WH-UDZ05KE5

WH-SDC0309K3E5 <sup>1)</sup>  
WH-UDZ07KE5

WH-SDC0309K3E5 <sup>1)</sup>  
WH-UDZ09KE5

**NEW**  
WH-SDC09K3E8 <sup>1)</sup>  
WH-UDZ09KE8

WH-SDC12K6E5  
WH-UDZ12KE5

**NEW**  
WH-SDC12K9E8  
WH-UDZ12KE8

**NEW**  
WH-SDC16K9E8  
WH-UDZ16KE8

Models with R32 refrigerant.

1) Also available with other backup heater capacities.  
WH-\_\_E5 1ph // WH-\_\_E8 3ph.

# Aquarea DHW Heat Pump

## Aquarea DHW Heat Pump · R290

100 L

150 L

200 L

260 L

P. 122



1ph



P-DHW100AE5



P-DHW150AE5















P-DHW200AE5  
P-DHW200CAE5



P-DHW260AE5  
P-DHW260CAE5



Check all our certified heat pumps on:  
[www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)

Aquarea T-CAP		9 kW	12 kW	16 kW
P. 93, 94, 95, 96	<b>All in One</b> · R32 1ph - 3ph			
		WH-ADC0912K6E53 WH-ADC0912K6E5AN3 WH-UXZ09KE5  WH-ADC0912K9E83 WH-ADC0912K9E8AN3 WH-UXZ09KE8	WH-ADC0912K6E53 WH-ADC0912K6E5AN3 WH-UXZ12KE5  WH-ADC0912K9E83 WH-ADC0912K9E8AN3 WH-UXZ12KE8	WH-ADC16K9E83 WH-ADC16K9E8AN3 WH-UXZ16KE8
P. 98	<b>All in One</b> · R410A 3ph			
		WH-ADC0916H9E8 WH-UQ09HE8	WH-ADC0916H9E8 WH-UQ12HE8	WH-ADC0916H9E8 WH-UQ16HE8
P. 97	<b>Bi-bloc</b> · R32 1ph - 3ph			
		WH-SXC09K3E5 <sup>1)</sup> WH-UXZ09KE5  WH-SXC09K3E8 WH-UXZ09KE8	WH-SXC12K6E5 WH-UXZ12KE5  WH-SXC12K9E8 WH-UXZ12KE8	WH-SXC16K9E8 WH-UXZ16KE8
P. 99	<b>Bi-bloc</b> · R410A 3ph			
		WH-SQC09H3E8 WH-UQ09HE8	WH-SQC12H9E8 WH-UQ12HE8	WH-SQC16H9E8 WH-UQ16HE8

Models with R32 refrigerant. Models with R410A refrigerant.

1) Also available with other backup heater capacities.

WH-\_\_E5 1ph // WH-\_\_E8 3ph.



## Aquarea High Performance Hydraulic L Series. Single phase - R290

**Natural refrigerant R290 with GWP 0,02.**

**Energy efficiency:** A+++ in heating at 35 °C.

**Flexibility:** Hydraulic connection between indoor and outdoor / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 75 °C water outlet temperature maximum at -10 °C outside temperature / 55 °C hot water even at -25 °C outside temperature.



\* For All in One.

Combination table						Outdoor unit			
Indoor unit						Heating capacity			
	DHW tank	Backup heater capacity	2 zones	Electrical anode		Single phase (power to indoor)			
						5,0 kW	7,0 kW	9,0 kW	
						WH-WDG05LE5	WH-WDG07LE5	WH-WDG09LE5	
Hydraulic All in One	1ph	120 L	3 kW	—	—	WH-ADC0509L3E51	✓	✓	✓
		120 L	3 kW	—	✓	WH-ADC0509L3E5AN1	✓	✓	✓
		185 L	3 kW	—	—	WH-ADC0509L3E5	✓	✓	✓
		185 L	3 kW	—	✓	WH-ADC0509L3E5AN	✓	✓	✓
		185 L	6 kW	—	—	WH-ADC0509L6E5	✓	✓	✓
		185 L	6 kW	—	✓	WH-ADC0509L6E5AN	✓	✓	✓
		185 L	3 kW	✓	—	WH-ADC0509L3E5B	✓	✓	✓
Hydraulic Bi-bloc	1ph	—	3 kW	—	—	WH-SDC0509L3E5	✓	✓	✓
		—	6 kW	—	—	WH-SDC0509L6E5	✓	✓	✓

Outdoor unit			WH-WDG05LE5	WH-WDG07LE5	WH-WDG09LE5
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	5,00/5,05	7,00/4,93	9,00/4,55
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	5,00/3,07	7,00/2,98	8,90/3,03
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	5,00/3,52	6,85/3,43	7,00/3,41
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	5,00/2,34	6,25/2,34	7,00/2,41
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	5,00/3,01	5,80/3,01	7,00/2,80
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	5,00/2,12	5,80/2,12	7,00/2,13
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	5,00/3,23	7,00/3,03	8,20/2,82
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	5,00/5,00	7,00/4,73	9,00/4,19
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,06/3,63(200/142)	4,96/3,62(195/142)	4,84/3,67(190/144)
	Energy class <sup>1)</sup>		A+++ / A++	A+++ / A++	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,00/4,27(237/168)	6,31/4,52(249/178)	6,44/4,50(255/177)
	Energy class <sup>1)</sup>		A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,25/3,28(167/128)	4,25/3,29(167/129)	4,31/3,33(170/130)
	Energy class <sup>1)</sup>		A++ / A++	A++ / A++	A++ / A++
Sound power <sup>2)</sup>	Heat	dB(A)	52	53	54
Dimension / Net weight	H x W x D	mm / kg	996 x 980 x 430 / 98	996 x 980 x 430 / 98	996 x 980 x 430 / 97
Refrigerant (R290) / CO <sub>2</sub> Eq.		kg / T	0,96/0,00002	0,96/0,00002	1,00/0,00002
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet	Heat / Cool	°C	20 ~ 75 / 5 ~ 20	20 ~ 75 / 5 ~ 20	20 ~ 75 / 5 ~ 20

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). \* EER and COP calculation is based in accordance to EN 14511.



DHW A+: For All in One. INTERNET CONTROL: Wi-Fi adapter included.

## All in One:

**Energy efficiency:** A+ in DHW / DHW up to 65 °C without heater / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,60.

**Flexibility:** Built-in 2 zone kit (for 2 zones models) / Installation in harsh water conditions (for models with Electrical Anode).

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Wi-Fi adapter included.

Indoor unit			WH-ADC0509L3E51*	WH-ADC0509L3E5	WH-ADC0509L6E5			
<b>Indoor unit 2 zones</b>			—	WH-ADC0509L3E5B	—			
<b>Indoor unit with Electrical Anode</b>			WH-ADC0509L3E5AN1*	WH-ADC0509L3E5AN	WH-ADC0509L6E5AN			
Sound pressure	Heat / Cool	dB(A)	31/31	28/28	28/28			
Dimension	HxWxD	mm	1293x599x602	1642x599x602	1642x599x602			
Net weight / 2 zones model		kg	79/—	93/101	94/—			
Water pipe connector	Room	Inch	1¼	1¼	1¼			
	Shower	Inch	¾	¾	¾			
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed			
	Input power (Min/Max)	W	30/145	30/145	30/145			
Heating water flow (ΔT=5 K. 35 °C)		L/min	14,3	14,3	25,8			
Water volume		L	120	185	185			
Maximum DHW temperature		°C	65	65	65			
Material inside tank			Stainless steel	Stainless steel	Stainless steel			
Water pipe connector (indoor / outdoor units)		Inch	1/1	1/1	1/1			
Pipe length range standard / maximum		m	5/30	5/30	5/30			
Elevation difference (in / out)		m	10	10	10			
Electric backup heater		kW	3,00	3,00	6,00			
Recommended fuse, supply 1 / 2 <sup>1)</sup>		A	25/16	25/16	25/30			
Recommended minimum cable size, supply 1 / 2 <sup>1)</sup>		mm <sup>2</sup>	3x2,5/3x1,5	3x2,5/3x1,5	3x2,5/3x4,0			
<b>Domestic Hot Water energy efficiency</b>			<b>120 L</b>	<b>185 L</b>	<b>120 L</b>	<b>185 L</b>	<b>120 L</b>	<b>185 L</b>
			ADC0509L3E51	ADC0509L3E5	ADC0509L3E51	ADC0509L3E5	ADC0509L3E51	ADC0509L3E5
			ADC0509L3E5AN1	ADC0509L3E5AN	ADC0509L3E5AN1	ADC0509L3E5AN	ADC0509L3E5AN1	ADC0509L3E5AN
<b>Indoor unit (I)</b>	<b>WH-</b>		ADC0509L3E5B	ADC0509L3E5B	ADC0509L3E5B	ADC0509L3E5B	ADC0509L3E5B	
			ADC0509L6E5	ADC0509L6E5	ADC0509L6E5	ADC0509L6E5	ADC0509L6E5	
			ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	
			ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	ADC0509L6E5AN	
<b>Outdoor unit</b>			<b>WH-WDG05LE5</b>	<b>WH-WDG07LE5</b>	<b>WH-WDG09LE5</b>			
Tapping profile according EN16147			M	L	M	L	M	L
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>	A+ to F		A+/A++/A	A+/A++/A	A+/A++/A	A+/A++/A	A+/A++/A	A+/A++/A
DHW tank ERP average climate η / COPdHW	ηwh %/COPdHW		115/2,88	148/3,61	115/2,88	148/3,61	115/2,88	148/3,61
DHW tank ERP warm climate η / COPdHW	ηwh %/COPdHW		134/3,35	160/4,00	134/3,35	160/4,00	134/3,35	160/4,00
DHW tank ERP cold climate η / COPdHW	ηwh %/COPdHW		90/2,26	112/2,80	90/2,26	112/2,80	90/2,26	112/2,80

1) Check local regulations. 2) Scale from A+ to F. \* Available Spring 2025. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

## Bi-bloc:

**Flexibility:** Flexible choice of DHW tank size.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Wi-Fi adapter included.

Indoor unit			WH-SDC0509L3E5	WH-SDC0509L6E5
Sound pressure	Heat / Cool	dB(A)	28/28	28/28
Dimension / Net weight	HxWxD	mm	892x500x348 / 33	892x500x348 / 33
Water pipe connector	Room	Inch	R1¼	R1¼
A class pump	Number of speeds		Variable speed	Variable speed
	Input power (Min/Max)	W	30/145	30/145
Heating water flow (ΔT=5 K. 35 °C)		L/min	14,3	20,1
Water pipe connector (indoor / outdoor units)		Inch	1/1	1/1
Pipe length range standard / maximum		m	5/30	5/30
Elevation difference (in / out)		m	10	10
Electric backup heater		kW	3,00	6,00
Recommended fuse, supply 1 / 2 <sup>1)</sup>		A	25/16	25/30
Recommended minimum cable size, supply 1 / 2 <sup>1)</sup>		mm <sup>2</sup>	3x2,5/3x1,5	3x2,5/3x4,0

1) Check local regulations. \* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Common accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat
<b>PAW-A2W-AFVLY-1</b>	1 antifreeze valve. It is required to order 2 valves per system

Bi-bloc accessories	
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLY-HW</b>	3 way valve for DHW tanks
<b>CZ-NV2</b>	3 way valve kit to fit inside the hydrokit. K and L Series
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L

## NEW Aquarea High Performance Hydraulic M Series Single phase · R290

**Natural refrigerant R290 with GWP 0,02.**

**Energy efficiency:** A+++ in heating at 35 °C.

**Flexibility:** Hydraulic connection between indoor and outdoor / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 75 °C water outlet temperature maximum at -15 °C outside temperature / 55 °C hot water even at -25 °C outside temperature.



\* For All in One.

Combination table				Outdoor unit			
Indoor unit				Heating capacity			
	DHW tank	Backup heater capacity	Electrical anode	Single phase			
				12,0 kW	16,0 kW		
				WH-WDG12ME5	WH-WDG16ME5		
Hydraulic All in One	120 L	3 kW	—	WH-ADC0916M3E51	✓	✓	
	120 L	3 kW	✓	WH-ADC0916M3E5AN1	✓	✓	
	185 L	3 kW	—	WH-ADC0916M3E52	✓	✓	
	185 L	3 kW	✓	WH-ADC0916M3E5AN2	✓	✓	
	185 L	6 kW	—	WH-ADC0916M6E52	✓	✓	
	260 L	3 kW	—	WH-ADC0916M3E53	✓	✓	
	260 L	3 kW	✓	WH-ADC0916M3E5AN3	✓	✓	
	260 L	6 kW	—	WH-ADC0916M6E53	✓	✓	
	3ph	185 L	9 kW	—	WH-ADC0316M9E82	✓	✓
		185 L	9 kW	✓	WH-ADC0316M9E8AN2	✓	✓
		260 L	9 kW	—	WH-ADC0316M9E83	✓	✓
		260 L	9 kW	✓	WH-ADC0316M9E8AN3	✓	✓
Hydraulic Bi-bloc	1ph	—	3 kW	—	WH-SDC0916M3E5	✓	✓
	—	—	6 kW	—	WH-SDC0916M6E5	✓	✓
	3ph	—	9 kW	—	WH-SDC0316M9E8	✓	✓
Control module	1ph	—	—	—	WH-CME5	✓	✓
	3ph	—	—	—	WH-CME8	✓	✓
Remote controller with Wi-Fi adapter	—	—	—	—	CZ-RTW2TAW1C	✓	✓

Outdoor unit			WH-WDG12ME5*	WH-WDG16ME5*
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP		12,10/4,78	16,00/4,31
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP		12,10/3,03	14,70/2,72
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP		11,50/3,44	13,20/3,28
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP		9,20/2,25	10,00/2,21
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP		10,10/2,78	11,60/2,57
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP		8,40/1,99	9,10/1,85
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER		9,00/3,61	9,00/3,61
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER		9,00/3,92	9,00/3,92
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> , %)	4,58/3,57(180/140)	4,46/3,57(176/140)
	Energy class <sup>1)</sup>		A+++ to D	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> , %)	6,47/4,34(256/171)	6,20/4,30(245/169)
	Energy class <sup>1)</sup>		A+++ to D	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> , %)	4,31/3,26(169/127)	4,28/3,20(168/125)
	Energy class <sup>1)</sup>		A+++ to D	A++ / A++
Sound power <sup>2)</sup>	Heat	dB(A)	55	59
	Dimension / Net weight	H x W x D	mm / kg	1520 x 1200 x 370 / 160
Pipe length range standard / maximum		m	5/30	5/30
Elevation difference (in / out)		m	30	30
A class pump	Number of speeds		Variable speed	Variable speed
	Input power (Min/Max)	W	30/175	30/175
Heating water flow (ΔT=5 K, 35 °C)		L/min	34,4	45,9
Refrigerant (R290) / CO <sub>2</sub> Eq. <sup>3)</sup>		kg / T	1,60/0,00003	1,60/0,00003
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43
Water outlet	Heat / Cool	°C	25 ~ 75 / 5 ~ 20	25 ~ 75 / 5 ~ 20
Recommended fuse, supply <sup>4)</sup>		A	32	32
Recommended minimum cable size, supply <sup>4)</sup>		mm <sup>2</sup>	3x4,0	3x4,0

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). 3) WH-WDG models are hermetically sealed. 4) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \* Available in Autumn 2025.



DHW A+: For All in One. INTERNET CONTROL: Wi-Fi adapter included.

## All in One:

**Energy efficiency:** A+ in DHW / DHW up to 65 °C without heater / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,60.  
**Flexibility:** Backup heater included / Built-in 10 L expansion vessel / 30 m maximum height difference between indoor and outdoor / Installation in harsh water conditions (for models with Electrical Anode).  
**Control:** All control functions / 2 CN-CNT ports / Optional PCB for advanced functions.  
**Connectivity:** Wi-Fi adapter included / Optional integration into BMS.

Indoor unit		WH-ADC	0916M3E51*	0916M3E52	0916M6E52	0316M9E82	0916M3E53	0916M6E53	0316M9E83
Indoor unit with Electrical Anode		WH-ADC	0916M3E5AN1*	0916M3E5AN2	—	0316M9E8AN2	0916M3E5AN3	—	0316M9E8AN3
Sound pressure	Heat / Cool	dB(A)	22/22	22/22	22/22	22/22	22/22	22/22	22/22
Dimension / Net weight	HxWxD	mm / kg	1293x599 x602/74	1642x599 x602/89	1642x599 x602/89	1642x599 x602/89	2036x599 x602/105	2036x599 x602/105	2036x599 x602/105
Water pipe connector	Room / Shower	Inch	1¼/¾	1¼/¾	1¼/¾	1¼/¾	1¼/¾	1¼/¾	1¼/¾
Water volume		L	120	185	185	185	260	260	260
Maximum DHW temperature		°C	65	65	65	65	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Water pipe connector (indoor / outdoor units)		Inch	1¼/1¼	1¼/1¼	1¼/1¼	1¼/1¼	1¼/1¼	1¼/1¼	1¼/1¼
Electric backup heater		kW	3,00	3,00	6,00	9,00	3,00	6,00	9,00
Recommended fuse, supply <sup>1)</sup>		A	16	16	30	20	15/16	30	20
Recommended minimum cable size, supply <sup>1)</sup>		mm <sup>2</sup>	3x1,5	3x1,5	3x4,0	5x1,5	3x1,5	3x4,0	5x1,5
Connecting cable to the outdoor unit size		mm <sup>2</sup>	2x0,75	2x0,75	2x0,75	2x0,75	2x0,75	2x0,75	2x0,75

### Domestic Hot Water energy efficiency

Indoor unit	WH-	ADC0916M3E51		ADC0916M3E52		ADC0916M3E53		ADC0916M3E53	
		ADC0916M3E5AN1	ADC0916M3E5AN1	ADC0916M3E5AN2	ADC0916M3E5AN2	ADC0916M3E5AN3	ADC0916M3E5AN3	ADC0916M6E52	ADC0916M6E53
Outdoor unit	WH-WDG12ME5	WH-WDG16ME5		WH-WDG12ME5		WH-WDG16ME5		WH-WDG12ME5	
		L	L	L	L	XL	XL	XL	XL
Tapping profile according EN16147									
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>	A+ to F	A/A/B	A/A/B	A+/A/A	A+/A/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A
DHW tank ERP average climate $\eta$ / COPdHW	$\eta_{wh}\%$ /COPdHW	84/2,1	96/2,1	100/2,50	96/2,40	123/3,08	123/3,08	98/2,45	98/2,45
DHW tank ERP warm climate $\eta$ / COPdHW	$\eta_{wh}\%$ /COPdHW	92/2,3	101/2,3	116/2,90	115/2,88	134/3,35	123/3,08	123/3,08	123/3,08
DHW tank ERP cold climate $\eta$ / COPdHW	$\eta_{wh}\%$ /COPdHW	64/1,6	70/1,6	80/2,00	76/1,90	94/2,35	80/2,00	80/2,00	80/2,00

1) Check local regulations. 2) Scale from A+ to F. Energy class A with 16 kW outdoor unit. \* Available Autumn 2025. Tentative data. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

## Bi-bloc:

**Flexibility:** Flexible choice of DHW tank size.

**Control:** All control functions / 2 CN-CNT ports / Optional PCB for advanced functions.

**Connectivity:** Wi-Fi adapter included / Optional integration into BMS.

Indoor unit			WH-SDC0916M3E5	WH-SDC0916M6E5	WH-SDC0316M9E8
Sound pressure	Heat / Cool	dB(A)	22/22	22/22	22/22
Dimension / Net weight	HxWxD	mm	892x500x348/28	892x500x348/28	892x500x348/29
Water pipe connector	Room	Inch	1¼	1¼	1¼
Water pipe connector (indoor / outdoor units)		Inch	1¼/1¼	1¼/1¼	1¼/1¼
Electric backup heater		kW	3,00	6,00	9,00
Recommended fuse, supply <sup>1)</sup>		A	15/16	30	20
Recommended minimum cable size, supply <sup>1)</sup>		mm <sup>2</sup>	3x1,5	3x4,0	5x1,5
Connecting cable to the outdoor unit size		mm <sup>2</sup>	2x0,75	2x0,75	2x0,75

1) Check local regulations. \* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

## Control module:

**Flexibility:** Simplified installation / Minimal interior space required / Supports third-party backup heater.

**Control:** All control functions / 2 CN-CNT ports / Optional PCB for advanced functions.

**Connectivity:** Wi-Fi adapter included / Optional integration into BMS.

Indoor unit			WH-CME5	WH-CME8
Dimension / Net weight	HxWxD	mm / kg	454x520x116/7	454x520x116/7
Field supply electrical backup heater		kW	Up to 3 kW	Up to 9 kW
Recommended fuse, supply <sup>1)</sup>		A	16	30
Recommended minimum cable size, supply <sup>1)</sup>		mm <sup>2</sup>	3x1,5	3x4,0
Connecting cable to the outdoor unit size		mm <sup>2</sup>	2x0,75	2x0,75

1) Check local regulations.

Accessories	
<b>CZ-RTW2TAW1C</b>	Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series
<b>CZ-RTW2</b>	Optional remote controller for 2 zone control. M Series
<b>CZ-NS6P</b>	PCB for advanced functions. M Series All in One and Bi-bloc
<b>CZ-NS7P</b>	PCB for advanced functions. M Series control module
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat
<b>PAW-A2W-AFVLY-1</b>	1 antifreeze valve. It is required to order 2 valves per system

Accessories	
<b>CZ-NV3</b>	3 way valve kit to fit inside the hydrokit. M Series
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLY-HW</b>	3 way valve for DHW tanks
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L
<b>PAW-BTANK100L</b>	Buffer tank 100 L
<b>PAW-BTANK200L</b>	Buffer tank 200 L
<b>PAW-BTANK260L</b>	Buffer tank 260 L



## Aquarea High Performance Mono-bloc J Series. Single phase - MDC · R32

**Energy efficiency:** A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.


**Flexibility:** Built-in magnetic water filter / Built-in 6 L expansion vessel.

**Comfort:** Operating range and heating curve down to -20 °C / 60 °C water outlet temperature / Cooling mode down to +10 °C.

**Control:** Additional functions with optional PCB (2 zone control, bivalent control, Smart Grid contact and more).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.

011-1W0398  
011-1W0399  
011-1W0400



Outdoor unit		Single phase			
		WH-MDC05J3E5	WH-MDC07J3E5	WH-MDC09J3E5	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	5,00/5,08	7,00/4,76	9,00/4,48	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	5,00/3,01	7,00/2,82	8,95/2,78	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	5,00/3,57	7,00/3,40	7,45/3,13	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	5,00/2,27	6,30/2,16	7,00/2,12	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	5,00/2,78	6,80/2,81	7,50/2,63	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	5,00/1,85	6,30/1,86	7,00/1,80	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	5,00/3,31	7,00/3,06	9,00/2,71	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	5,00/5,05	7,00/4,73	9,00/4,25	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,12/3,63(202/142)	4,90/3,32(193/130)	4,90/3,32(193/130)
	Energy class		A+++ / A++	A+++ / A++	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,00/4,20(237/165)	5,75/4,07(227/160)	5,75/4,07(227/160)
	Energy class		A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,08/2,95(160/115)	4,18/2,98(164/116)	4,18/2,98(164/116)
	Energy class		A+++ / A+	A++ / A+	A++ / A+
Sound power <sup>1)</sup>	Heat	dB(A)	59	59	59
Dimension	HxWxD	mm	865x1283x320	865x1283x320	865x1283x320
Net weight		kg	99	104	104
Refrigerant (R32) / CO <sub>2</sub> Eq. <sup>2)</sup>		kg / T	1,3/0,878	1,3/0,878	1,3/0,878
Water pipe connector		Inch	R 1½	R 1½	R 1½
Pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	34/96	36/100	39/108
Heating water flow (ΔT=5 K, 35 °C)		L/min	14,3	20,1	25,8
Electric backup heater		kW	3,00	3,00	3,00
Input power	Heat	kW	0,985	1,47	2,01
	Cool	kW	1,51	2,29	3,32
Running and starting current	Heat	A	4,7	7,0	9,3
	Cool	A	7,0	10,5	14,7
Current 1		A	12	17	17
Current 2		A	13	13	13
Recommended fuse <sup>3)</sup>		A	30/15	30/15	30/16
Recommended minimum cable size, supply 1 / 2 <sup>3)</sup>		mm <sup>2</sup>	3x1,5/3x1,5	3x2,5/3x1,5	3x2,5/3x1,5
Operating range - outdoor ambient	Heat	°C	-20 ~ 35	-20 ~ 35	-20 ~ 35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet	Heat	°C	20 ~ 60	20 ~ 60	20 ~ 60
	Cool	°C	5 ~ 20	5 ~ 20	5 ~ 20

1) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 2) WH-MDC models are hermetically sealed. 3) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511.

### Accessories

PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel
PAW-TA20C1E5STD	Tank 200 L - Enamelled
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-TD20B8E3-2	Combo Tank 185 L + 80 L - Enamelled
PAW-TD23B6E5	Combo Tank 230 L + 60 L - Stainless steel
PAW-3WYVLV-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L

### Accessories


CZ-TAW1C	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
CZ-TAW1-CBL	10 m extension cable for CZ-TAW1C
PAW-A2W-AFVLY-1	1 antifreeze valve. It is required to order 2 valves per system
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

# Validating efficiency and performance of Aquarea Heat Pumps

Aquarea Heat Pumps achieve outstanding efficiency and performance, validated through ErP labels and Keymark certifications. These credentials ensure that Aquarea Heat Pumps deliver reliable and sustainable heating solutions.

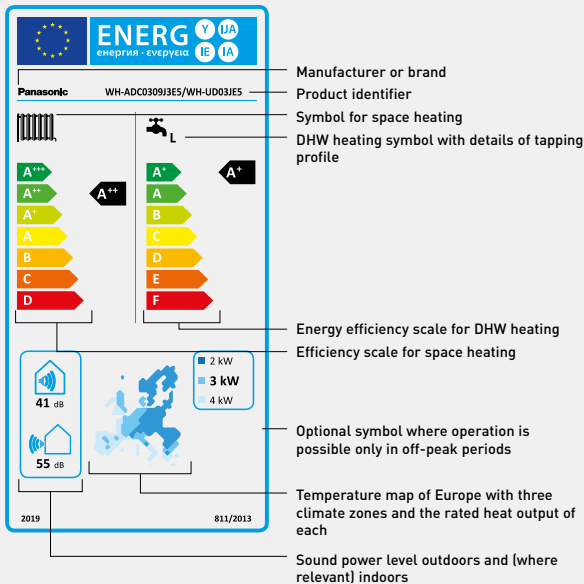

## Energy labels: guiding consumers to energy savings

Energy labels help consumers make informed purchasing decisions and support Ecodesign requirements that reduce energy demand and combat global warming. Heat pumps are classified into seven efficiency categories, from A+++ (most efficient) to D (least efficient). For hot water cylinders, the range is from A+ to F. Thanks to advanced technologies, Panasonic offers solutions that achieve the highest energy ratings, ensuring high efficiency and performance.



## Keymark certification: a mark of quality and reliability

The Keymark certification is a quality mark that demonstrates compliance with European standards. Issued by independent certification bodies, it ensures products meet rigorous quality and performance criteria. Aquarea Heat Pumps proudly carry the Keymark certification, validating their exceptional efficiency and reliability.



Check all our certified heat pumps on: [www.heatpumpkeymark.com](http://www.heatpumpkeymark.com)



**Aquarea T-CAP Hydraulic M Series outdoor units. Single phase / Three phase · R290**

**Natural refrigerant R290 with GWP 0,02.**

**Energy efficiency:** A+++ in heating at 35 °C / Built-in flow meter.

**Flexibility:** Hydraulic connection between indoor and outdoor / Built-in magnetic water filter.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 75 °C water temperature at -15 °C outside / 55 °C hot water even at -25 °C outside temperature / Low noise level.

**Control:** Optimised user interface and improved features [2 zone control, bivalent control].



\* For All in One.

Combination table - Aquarea T-CAP Hydraulic M Series					Outdoor unit					
Indoor unit					Heating capacity					
	DHW tank	Backup heater capacity	Electrical anode		Single phase		Three phase			
					9,0 kW	12,0 kW	9,0 kW	12,0 kW	16,0 kW	
					WH-WXG09ME5	WH-WXG12ME5	WH-WXG09ME8	WH-WXG12ME8	WH-WXG16ME8	
Hydraulic All in One	1ph	120 L	3 kW	—	WH-ADC0916M3E51	✓	✓	—	—	—
		120 L	3 kW	✓	WH-ADC0916M3E5AN1	✓	✓	—	—	—
		185 L	3 kW	—	WH-ADC0916M3E52	✓	✓	—	—	—
		185 L	3 kW	✓	WH-ADC0916M3E5AN2	✓	✓	—	—	—
		185 L	6 kW	—	WH-ADC0916M6E52	✓	✓	—	—	—
	3ph	260 L	3 kW	—	WH-ADC0916M3E53	✓	✓	—	—	—
		260 L	3 kW	✓	WH-ADC0916M3E5AN3	✓	✓	—	—	—
		260 L	6 kW	—	WH-ADC0916M6E53	✓	✓	—	—	—
		120 L	9 kW	—	WH-ADC0916M9E81	—	—	✓	✓	✓
		120 L	9 kW	✓	WH-ADC0916M9E8AN1	—	—	✓	✓	✓
Hydraulic Bi-bloc	1ph	—	3 kW	—	WH-SDC0916M3E5	✓	✓	—	—	—
		—	6 kW	—	WH-SDC0916M6E5	✓	✓	—	—	—
	3ph	—	9 kW	—	WH-SDC0316M9E8	✓	✓	✓	✓	✓
		—	9 kW	✓	WH-SDC0316M9E8AN1	✓	✓	✓	✓	✓
Control module	1ph	—	—	—	WH-CME5	✓	✓	—	—	—
	3ph	—	—	—	WH-CME8	✓	✓	✓	✓	✓
Remote controller with Wi-Fi adapter	—	—	—	—	CZ-RTW2TAW1C	✓	✓	✓	✓	✓

Combination table - Big Aquarea T-CAP Hydraulic M Series					Outdoor unit			
Indoor unit					Heating capacity			
					Three phase			
					20,0 kW	25,0 kW	30,0 kW	
					WH-WXG20ME8	WH-WXG25ME8	WH-WXG30ME8	
Control module	3ph	—	—	—	WH-CME8L	✓	✓	✓
Remote controller with Wi-Fi adapter	—	—	—	—	CZ-RTW2TAW1C	✓	✓	✓

Accessories	
CZ-RTW2TAW1C	Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series
CZ-RTW2	Optional remote controller for 2 zone control. M Series
CZ-NS6P	PCB for advanced functions. M Series All in One and Bi-bloc
CZ-NS7P	PCB for advanced functions. M Series control module
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIREDLESS	Wireless LCD room thermostat
PAW-A2W-AFVLV-112	1 antifreeze valve 1 1/2". It is required to order 2 valves per system. For 20, 25 and 30 kW
PAW-A2W-AFVLV-1	1 antifreeze valve. It is required to order 2 valves per system. For 9, 12 and 16 kW

Accessories	
PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel
PAW-TA20C1E5STD	Tank 200 L - Enamelled
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-3WYVLV-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L
PAW-BTANK100L	Buffer tank 100 L
PAW-BTANK200L	Buffer tank 200 L
PAW-BTANK260L	Buffer tank 260 L



DHW A+: For All in One. INTERNET CONTROL: Wi-Fi adapter included.

## Aquarea T-CAP Hydraulic M Series outdoor units.

Outdoor unit		WH-WXG09ME5	WH-WXG12ME5	WH-WXG09ME8	WH-WXG12ME8	WH-WXG16ME8	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/5,23	12,00/5,06	9,00/5,23	12,00/5,06	16,00/4,89	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/3,24	12,00/3,23	9,00/3,24	12,00/3,23	16,00/3,20	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,81	12,00/3,54	9,00/3,81	12,00/3,54	16,00/3,30	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,54	12,00/2,42	9,00/2,54	12,00/2,42	16,00/2,37	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/3,45	12,00/3,00	9,00/3,45	12,00/3,00	16,00/2,53	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	9,00/2,35	12,00/2,17	9,00/2,35	12,00/2,17	16,00/1,97	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	9,00/3,61	9,00/3,61	9,00/3,61	9,00/3,61	9,00/3,61	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	9,00/5,26	12,00/5,26	9,00/5,26	12,00/5,26	16,00/5,26	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	5,00/3,46(197/135)	5,00/3,50(197/137)	4,73/3,65(186/143)	4,75/3,70(187/115)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,33/4,40(250/173)	6,20/4,40(245/173)	6,08/4,45(240/175)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,45/3,20(175/125)	4,38/3,25(172/127)	4,33/3,40(170/133)
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A++	A+++/A++	A++/A++	A++/A++
Sound power <sup>2)</sup>	Heat	dB(A)	52	53	52	53	57
Dimension	H x W x D	mm	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430	1520 x 1200 x 430
Net weight		kg	161	161	161	161	165
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	30/175	30/175	30/175	30/175	30/175
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Refrigerant (R290) / CO <sub>2</sub> Eq. <sup>3)</sup>		kg / T	1,78/0,00004	1,78/0,00004	1,78/0,00004	1,78/0,00004	1,78/0,00004
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43
	DHW	°C	-28 ~ +43	-28 ~ +43	-28 ~ +43	-28 ~ +43	-28 ~ +43
Water outlet	Heat / Cool	°C	25 ~ 75 <sup>4)</sup> / 5 ~ 20	25 ~ 75 <sup>4)</sup> / 5 ~ 20	25 ~ 75 <sup>4)</sup> / 5 ~ 20	25 ~ 75 <sup>4)</sup> / 5 ~ 20	25 ~ 75 <sup>4)</sup> / 5 ~ 20
Recommended fuse, supply <sup>5)</sup>		A	30	30	20	20	25
Recommended minimum cable size, supply <sup>5)</sup>		mm <sup>2</sup>	3x4,0	3x4,0	5x1,5	5x1,5	5x2,5

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). 3) WH-WXG models are hermetically sealed. 4) Above -15 °C outdoor temperature. Between outdoor ambient -15 °C and -25 °C, the water outlet temperature gradually decreases from 75 °C to 55 °C. Below -25 °C outdoor temperature maximum water outlet temperature is 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511.

## Big Aquarea T-CAP Hydraulic M Series outdoor units.

Outdoor unit		WH-WXG20ME8	WH-WXG25ME8	WH-WXG30ME8	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	20,00/4,80	25,00/4,50	30,00/4,40	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	20,00/3,18	25,00/3,00	30,00/3,00	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	20,00/3,39	25,00/2,80	30,00/2,50	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	20,00/2,08	25,00/1,97	30,00/1,95	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	20,00/2,48	25,00/2,36	30,00/2,33	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	20,00/1,90	25,00/1,80	30,00/1,49	
Cooling capacity / EER (A 35 °C, W 7 °C) at Comfort mode	kW / EER	20,00/3,02	25,00/2,86	26,00/2,68	
Cooling capacity / EER (A 35 °C, W 7 °C) at Efficiency mode (default)	kW / EER	15,00/3,61	15,00/3,61	15,00/3,61	
Cooling capacity / EER (A 35 °C, W 18 °C) at Comfort mode	kW / EER	20,00/4,79	25,00/4,47	30,00/4,10	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,36/3,59 (171/141)	4,25/3,57 (167/140)	3,95/3,46 (155/135)
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A++	A++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,37/4,07 (212/160)	5,22/4,14 (206/163)	4,93/4,01 (194/158)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	3,07/2,57 (120/100)	3,16/2,71 (123/105)	3,20/2,71 (125/105)
	Energy class <sup>1)</sup>	A+++ to D	A/A+	A+/A+	A+/A+
Sound power <sup>2)</sup>	Heat	dB(A)	56	59	61
Dimension	H x W x D	mm	1645 x 1500 x 460	1645 x 1500 x 460	1645 x 1500 x 460
Net weight		kg	240	240	240
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	230	230	230
Heating water flow (ΔT=5 K, 35 °C)		L/min	57,3	71,6	86,0
Refrigerant (R290) / CO <sub>2</sub> Eq. <sup>3)</sup>		kg / T	3,0/0,00006	3,0/0,00006	3,0/0,00006
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet	Heat / Cool	°C	20 ~ 75 <sup>4)</sup> / 5 ~ 20	20 ~ 75 <sup>4)</sup> / 5 ~ 20	20 ~ 75 <sup>4)</sup> / 5 ~ 20
Recommended fuse, supply <sup>5)</sup>		A	50	50	50
Recommended minimum cable size, supply <sup>5)</sup>		mm <sup>2</sup>	5x10 - 5x16	5x10 - 5x16	5x10 - 5x16

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825 (part load). 3) WH-WXG models are hermetically sealed. 4) Above 15 °C ambient temperature. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511.



## Aquarea T-CAP Hydraulic M Series indoor units. Single phase / Three phase · R290

Natural refrigerant R290 with GWP 0,02.

**Control:** All control functions / 2 CN-CNT ports / Optional PCB for advanced functions.

**Connectivity:** Wi-Fi adapter included / Optional integration into BMS.



### Control module:

**Flexibility:** Simplified installation / Minimal interior space required / Supports third-party backup heater.

Indoor unit		WH-CME5	WH-CME8	WH-CME8L	
Dimension / Net weight	HxWxD	mm / kg	454x520 x 116/7	454x520 x 116/7	454x520 x 116/7
Field supply electrical backup heater		kW	Up to 3 kW	Up to 9 kW	Up to 18 kW
Recommended fuse, supply <sup>1)</sup>		A	16	30	≤9 kW: 20 — 9 kW< ≤18 kW: 40
Recommended minimum cable size, supply <sup>1)</sup>		mm <sup>2</sup>	3x1,5	3x4,0	≤12 kW: 5x2,5 12 kW< ≤15 kW: 5x4,0 15 kW< ≤18 kW: 5x6,0
Connecting cable to the outdoor unit size		mm <sup>2</sup>	2x0,75	2x0,75	2x0,75

1) Check local regulations.

### Bi-bloc:

**Flexibility:** Flexible choice of DHW tank size.

Indoor unit		WH-SDC0916M3E5	WH-SDC0916M6E5	WH-SDC0316M9E8	
Sound pressure	Heat / Cool	dB(A)	22/22	22/22	22/22
Dimension / Net weight	HxWxD	mm	892x500x348/28	892x500x348/28	892x500x348/29
Water pipe connector	Room	Inch	1¼	1¼	1¼
Water pipe connector (indoor / outdoor units)		Inch	1¼/1¼	1¼/1¼	1¼/1¼
Pipe length range standard / maximum		m	5/30	5/30	5/30
Elevation difference (in / out)		m	30	30	30

Electrical information for Bi-bloc and All in One indoor units		Single phase (3 kW heater)	Single phase (6 kW heater)	Three phase (9 kW heater)
Electric backup heater	kW	3	6	9
Recommended fuse, supply <sup>1)</sup>	A	16	30	20
Recommended minimum cable size, supply <sup>1)</sup>	mm <sup>2</sup>	3x1,5	3x4,0	5x1,5
Connecting cable to the outdoor unit size	mm <sup>2</sup>	2x0,75	2x0,75	2x0,75

1) Check local regulations. \* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW2TAW1C</b>	Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series
<b>CZ-RTW2</b>	Optional remote controller for 2 zone control. M Series
<b>CZ-NS6P</b>	PCB for advanced functions. M Series All in One and Bi-bloc
<b>CZ-NS7P</b>	PCB for advanced functions. M Series control module
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat
<b>CZ-NV3</b>	3 way valve kit to fit inside the hydrokit. M Series

Accessories	
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L
<b>PAW-BTANK100L</b>	Buffer tank 100 L
<b>PAW-BTANKG200L</b>	Buffer tank 200 L
<b>PAW-BTANKG260L</b>	Buffer tank 260 L



DHW A+: For All in One. INTERNET CONTROL: Wi-Fi adapter included.

## All in One:

**Energy efficiency:** A+ in DHW / DHW up to 65 °C without heater / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,60.  
**Flexibility:** Backup heater included / Built-in 10 L expansion vessel / 30 m maximum height difference between indoor and outdoor / Installation in harsh water conditions (for models with Electrical Anode).

All in One with 120 L DHW tank*			Single phase	Three phase
<b>Indoor unit</b>			<b>WH-ADC0916M3E51</b>	<b>WH-ADC0916M9E81</b>
<b>Indoor unit with Electrical Anode</b>			<b>WH-ADC0916M3E5AN1</b>	<b>WH-ADC0916M9E8AN1</b>
Dimension / Net weight	H x W x D	mm / kg	1293 x 599 x 602 / 74	
Water volume		L	120	
Electric backup heater		kW	3	

## Domestic Hot Water energy efficiency

Indoor unit		WH-ADC0916M3E51	WH-ADC0916M3E5AN1	WH-ADC0916M9E81	WH-ADC0916M9E8AN1
<b>Outdoor unit</b>		<b>WH-WXG09ME5</b>	<b>WH-WXG12ME5</b>	<b>WH-WXG09ME8</b>	<b>WH-WXG12ME8</b>
Tapping profile according EN16147		L	L	L	L
DHW tank ERP efficiency average / warm / cold <sup>1)</sup>	A+ to F	A+ / A / A	A+ / A / A	A+ / A / A	A+ / A / A
DHW tank ERP average climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	96 / 2,41	96 / 2,41	96 / 2,41	96 / 2,41
DHW tank ERP warm climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	101 / 2,7	101 / 2,7	101 / 2,7	101 / 2,7
DHW tank ERP cold climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	70 / 1,75	70 / 1,75	70 / 1,75	70 / 1,75

All in One with 185 L DHW tank			Single phase	Three phase
<b>Indoor unit</b>			<b>WH-ADC0916M3E52</b>	<b>WH-ADC0316M9E82</b>
<b>Indoor unit with Electrical Anode</b>			<b>WH-ADC0916M3E5AN2</b>	<b>WH-ADC0316M9E8AN2</b>
Dimension / Net weight	H x W x D	mm / kg	1642 x 599 x 602 / 89	1642 x 599 x 602 / 89
Water volume		L	185	185
Electric backup heater		kW	3	9

## Domestic Hot Water energy efficiency

Indoor unit		WH-ADC0916M3E52	WH-ADC0916M3E5AN2	WH-ADC0316M9E82	WH-ADC0316M9E8AN2
<b>Outdoor unit</b>		<b>WH-WXG09ME5</b>	<b>WH-WXG12ME5</b>	<b>WH-WXG09ME8</b>	<b>WH-WXG12ME8</b>
Tapping profile according EN16147		L	L	L	L
DHW tank ERP efficiency average / warm / cold <sup>1)</sup>	A+ to F	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A
DHW tank ERP average climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	123 / 3,00	123 / 3,00	123 / 3,00	117 / 2,85
DHW tank ERP warm climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	132 / 3,30	132 / 3,30	132 / 3,30	128 / 3,20
DHW tank ERP cold climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	88 / 2,20	88 / 2,20	88 / 2,20	84 / 2,10

All in One with 260 L DHW tank			Single phase	Three phase
<b>Indoor unit</b>			<b>WH-ADC0916M3E53</b>	<b>WH-ADC0316M9E83</b>
<b>Indoor unit with Electrical Anode</b>			<b>WH-ADC0916M3E5AN3</b>	<b>WH-ADC0316M9E8AN3</b>
Dimension / Net weight	H x W x D	mm / kg	2036 x 599 x 602 / 105	2036 x 599 x 602 / 105
Water volume		L	260	260
Electric backup heater		kW	3	9

## Domestic Hot Water energy efficiency

Indoor unit		WH-ADC0916M3E53	WH-ADC0916M3E5AN3	WH-ADC0316M9E83	WH-ADC0316M9E8AN3
<b>Outdoor unit</b>		<b>WH-WXG09ME5</b>	<b>WH-WXG12ME5</b>	<b>WH-WXG09ME8</b>	<b>WH-WXG12ME8</b>
Tapping profile according EN16147		XL	XL	XL	XL
DHW tank ERP efficiency average / warm / cold <sup>1)</sup>	A+ to F	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A	A / A+ / A
DHW tank ERP average climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	123 / 3,00	123 / 3,00	125 / 3,10	115 / 2,85
DHW tank ERP warm climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	132 / 3,30	132 / 3,30	136 / 3,35	129 / 3,20
DHW tank ERP cold climate $\eta$ / COPdHW	$\eta_{wh}$ % / COPdHW	88 / 2,20	88 / 2,20	95 / 2,35	85 / 2,10

## All in One Indoor units technical data

Sound pressure	Heat / Cool	dB(A)	22 / 22
Water pipe connector	Room	Inch	1¼
	Shower	Inch	3/4
Maximum DHW temperature		°C	65
Material inside tank			Stainless steel
Water pipe connector (indoor / outdoor units)		Inch	1¼ / 1¼
Pipe length range standard / maximum		m	5 / 30
Elevation difference (in / out)		m	30

1) Scale from A+ to F. \* Available in Autumn 2025. Tentative data. \*\* This product is designed to comply with the European drinking water standard [EU] 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

## Aquarea T-CAP Mono-bloc J Series. Single phase / Three phase - MXC · R32

**Energy efficiency:** A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Built-in magnetic water filter.

**Comfort:** Constant capacity and operating range down to -20 °C / 65 °C water outlet temperature.

**Control:** Additional functions with optional PCB (2 zone control, bivalent control, Smart Grid contact and more).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.




011-1W0463, 011-1W0464, 011-1W0562, 011-1W0563, 011-1W0564, 011-1W0565. For 9 and 12 kW single and three phase.



ErP 55 °C  
Scale from A+++ to D



ErP 35 °C  
Scale from A+++ to D



Outdoor unit		Single phase			Three phase		
		WH-MXC09J3E5	WH-MXC12J6E5	WH-MXC09J3E8	WH-MXC12J9E8	WH-MXC16J9E8	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/5,08	12,00/4,80	9,00/5,08	12,00/4,80	16,00/4,52	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/3,08	12,00/3,05	9,00/3,08	12,00/3,05	16,00/2,86	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,81	12,00/3,53	9,00/3,81	12,00/3,53	16,00/3,10	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,54	12,00/2,42	9,00/2,54	12,00/2,42	16,00/2,07	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/3,08	12,00/2,82	9,00/3,08	12,00/2,82	16,00/2,39	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	9,00/2,12	12,00/2,00	9,00/2,12	12,00/2,00	16,00/1,71	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	9,00/3,18	12,00/2,90	9,00/3,09	12,00/2,84	14,50/2,84	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	9,00/4,62	12,00/3,95	9,00/4,46	12,00/3,79	16,00/3,75	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,46/3,31(176/129)
	Energy class <sup>1)</sup>		A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)
	Energy class <sup>1)</sup>		A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>		A+++ to D	A++ / A++	A++ / A++	A++ / A++	A++ / A++
Sound power <sup>2)</sup>	Heat	dB(A)	61	61	61	61	63
Dimension	H x W x D	mm	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320
Net weight		kg	140	140	140	140	150
Refrigerant (R32) / CO <sub>2</sub> Eq. <sup>3)</sup>		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,80/1,215
Water pipe connector		Inch	R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4	R 1 1/4
Pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	32/145	34/145	145	145	145
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Electric backup heater		kW	3,00	6,00	3,00	9,00	9,00
Input power	Heat	kW	1,77	2,50	1,77	2,50	3,54
	Cool	kW	2,83	4,14	2,91	4,23	5,11
Running and starting current	Heat	A	8,3	11,6	2,6	3,7	5,3
	Cool	A	13,1	19,1	4,3	6,3	7,6
Current 1		A	29,0	29,0	14,7	11,8	16,4
Current 2		A	13,0	26,0	13,0	13,0	13,0
Recommended fuse, supply 1 / 2 <sup>4)</sup>		A	30/30	30/30	20/16	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>4)</sup>		mm <sup>2</sup>	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/3x1,5	5x1,5/5x1,5	5x2,5/5x1,5
Operating range - outdoor ambient	Heat	°C	-20 ~ +35	-20 ~ +35	-20 ~ +35	-20 ~ +35	-20 ~ +35
	Cool	°C	10 ~ +43	10 ~ +43	10 ~ +43	10 ~ +43	10 ~ +43
Water outlet <sup>5)</sup>	Heat	°C	20 ~ 65	20 ~ 65	20 ~ 65	20 ~ 65	20 ~ 65
	Cool	°C	5 ~ 20	5 ~ 20	5 ~ 20	5 ~ 20	5 ~ 20

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825. 3) WH-MXC models are hermetically sealed. 4) Check local regulations. 5) It is possible to set temperature by 65 °C on remote controller. Normally, outlet water temperature is 60 °C or lower. In case of ΔT setting with remote controller is 15 °C and the outdoor ambient temperature is 5 to 20 °C, outlet water temperature 65 °C is possible. \* EER and COP calculation is based in accordance to EN 14511.

Accessories	
PAW-TD20C1E5-1	Tank 200 L - Stainless steel
PAW-TD30C1E5-1	Tank 300 L - Stainless steel
PAW-TA20C1E5STD	Tank 200 L - Enamelled
PAW-TA30C1E5STD	Tank 300 L - Enamelled
PAW-TD20B8E3-2	Combo Tank 185 L + 80 L - Enamelled
PAW-TD23B6E5	Combo Tank 230 L + 60 L - Stainless steel
PAW-3WYVLV-HW	3 way valve for DHW tanks
PAW-BTANK50L-2	Buffer tank 50 L

Accessories	
CZ-TAW1C	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
CZ-TAW1-CBL	10 m extension cable for CZ-TAW1C
PAW-A2W-AFVLV-1	1 antifreeze valve. It is required to order 2 valves per system
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

**Aquarea EcoFlex. Single phase · R32**

**Energy efficiency:** Heat recovery function, to re-use wasted heat of outdoor unit for DHW production.

**Flexibility:** Small foot print outdoor unit, tank unit with a standard size of appliances.

**Comfort:** Non-stop heating operation / nanoe™ X technology to improve protection 24/7 (nanoe X Generator Mark 2).

**Connectivity:** Wi-Fi adapter included via Aquarea Smart Cloud or Panasonic Comfort Cloud App.



**WH-ADF0309J3E5CM**

Air to water	Heating capacity / COP [A +7 °C, W 35 °C]		kW / COP	8,00/4,21
	Heating capacity / COP [A +7 °C, W 55 °C]		kW / COP	8,00/2,81
	Heating capacity / COP [A +2 °C, W 35 °C]		kW / COP	6,70/3,25
	Heating capacity / COP [A +2 °C, W 55 °C]		kW / COP	6,00/2,08
	Heating capacity / COP [A -7 °C, W 35 °C]		kW / COP	5,60/2,84
	Heating capacity / COP [A -7 °C, W 55 °C]		kW / COP	5,30/1,91
	Cooling capacity / EER [A 35 °C, W 7 °C]		kW / EER	—
	Cooling capacity / EER [A 35 °C, W 18 °C]		kW / EER	—
	Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,00/3,20 [157 / 125]
		Energy class <sup>1)</sup>	A+++ to D	A++/A++
	Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,69/3,69 [224 / 145]
		Energy class <sup>1)</sup>	A+++ to D	A+++/A++
	Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	3,61/2,80 [141 / 109]
		Energy class <sup>1)</sup>	A+++ to D	A+/A+
	Sound pressure	Heat / Cool	dB(A)	28 / —
	Dimension / Net weight	HxWxD	mm / kg	1880x598x600/108
	Electric backup heater		kW	3,00
	Water volume		L	185
	Maximum DHW temperature		°C	65
	Heating water flow [ΔT=5 K, 35 °C]		L/min	22,90
Tapping profile according EN16147			L	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A/A+/A	
DHW tank ERP average climate η / COPdhw		η <sub>wh</sub> % / COPdhw	104/2,60	
DHW tank ERP warm climate η / COPdhw		η <sub>wh</sub> % / COPdhw	134/3,35	
DHW tank ERP cold climate η / COPdhw		η <sub>wh</sub> % / COPdhw	92/2,30	
Heat recovery capacity (DHW 55 °C)		kW	7,10+9,00	
Heat recovery input power (DHW 55 °C)		kW	3,15	
Heat recovery COP (DHW 55 °C)			5,11	
Water outlet		°C	20 - 55	

**S-71WF3E**

Air to air	Cooling capacity	Nominal	kW	7,10
	EER <sup>3)</sup>	Nominal	W/W	3,40
	<b>SEER <sup>4)</sup></b>			<b>5,60 A+</b>
	Pdesign (cooling)			7,10
	Heating capacity	Nominal	kW	7,10
	COP <sup>3)</sup>	Nominal	W/W	3,90
	<b>SCOP <sup>4)</sup></b>			<b>3,90 A</b>
	Pdesign at -10 °C		kW	4,80
	External static pressure <sup>5)</sup>		Pa	30 [10 - 150]
	Air flow		m <sup>3</sup> /min	22,7
	Sound pressure <sup>6)</sup>	Cool / Heat (Hi)	dB(A)	34/34
	Sound power <sup>7)</sup>	Cool / Heat (Hi)	dB(A)	57/57
	Dimension / Net weight	HxWxD	mm / kg	250x1000x730/30
	nanoe X Generator			Mark 2

**CU-2WZ71YBE5**

Outdoor unit	Sound pressure	Cool / Heat (air to air)	dB(A)	49/49
	Sound power <sup>7)</sup>	Cool / Heat (air to air)	dB(A)	68/67
	Sound pressure	Heat (air to water)	dB(A)	51
	Sound power <sup>8)</sup>	Heat (air to water)	dB(A)	61
	Dimension / Net weight	HxWxD	mm / kg	999x940x340/82
	Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2,40/1,62
	Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35) / 1/2 (12,70)
	Pipe length range / Elevation difference (in / out)		m / m	35/30
	Pre-charged pipe length / Additional gas amount		m / g/m	30/20
	Operating range - outdoor ambient	Heat (air to air)	°C	-15 ~ +24
		Cool (air to air)	°C	-10 ~ +46
Heat (air to water)		°C	-15 ~ +35	
Heat recovery (floor / DHW)		°C	+10 ~ +35 / +10 ~ +46	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) EER and COP calculation is based in accordance to EN 14511. 4) SEER and SCOP is calculated based on values of EU/626/2011. 5) Medium external static pressure setting from factory. 6) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 7) Sound power is measured in accordance with EN 14511 and EN 12102-1:2017 at +7 °C. 8) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C.



INTERNET CONTROL: Wi-Fi adapter included.



**Aquarea High Performance All in One 185 L K Series. Single phase · R32**

**Energy efficiency:** COP up to 5,33 / A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,50.

**Flexibility:** 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.




		Single phase [power to indoor]								
Kit 3 kW electric heater		KIT-ADC03K3E5	KIT-ADC05K3E5	KIT-ADC07K6E5	KIT-ADC09K3E5	—	—			
Kit 6 kW electric heater		KIT-ADC03K6E5	KIT-ADC05K6E5	KIT-ADC07K6E5	KIT-ADC09K6E5	KIT-ADC12K6E5	KIT-ADC16K6E5*			
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	3,20/5,33	5,00/5,10	7,00/4,86	9,00/4,55	12,10/4,78	16,00/4,31			
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	3,20/2,81	5,00/3,03	7,00/2,92	8,90/2,93	12,00/2,96	14,70/2,72			
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	3,20/3,64	5,00/3,57	6,85/3,43	7,00/3,40	11,50/3,44	13,00/3,18			
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	3,20/2,19	5,00/2,29	6,25/2,23	6,30/2,18	9,20/2,25	10,00/2,24			
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	3,30/2,80	5,00/2,79	5,75/2,95	6,25/2,84	10,10/2,74	11,70/2,61			
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	3,20/1,79	5,00/1,89	5,35/1,98	5,90/1,93	8,40/1,97	9,10/1,85			
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	3,20/3,52	5,00/3,05	6,70/3,03	8,20/2,72	10,70/2,68	12,20/2,68			
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	3,20/4,71	5,00/4,90	6,70/4,72	9,00/4,18	10,70/3,92	13,00/3,80			
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,07/3,47(200/136)	5,12/3,63(202/142)	4,90/3,62(193/142)	4,44/3,41(175/133)	4,58/3,33(180/130)	4,46/3,40(176/133)		
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++		
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,20/4,20(245/165)	6,00/4,20(237/165)	5,75/4,07(227/160)	5,75/4,07(227/160)	6,47/4,34(256/171)	6,20/4,30(245/169)		
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++		
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,00/2,83(157/110)	4,08/2,95(160/115)	4,18/2,98(164/116)	4,18/2,98(164/116)	4,31/3,26(169/127)	4,28/3,10(168/121)		
	Energy class <sup>1)</sup>	A+++ to D	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+	A++/A+		
<b>Indoor unit 3 kW electric heater</b>		<b>WH-ADC0309K3E5</b>	<b>WH-ADC0309K3E5</b>	<b>WH-ADC0309K3E5</b>	<b>WH-ADC0309K3E5</b>	—	—			
<b>Indoor unit 6 kW electric heater</b>		<b>WH-ADC0309K6E5</b>	<b>WH-ADC0309K6E5</b>	<b>WH-ADC0309K6E5</b>	<b>WH-ADC0309K6E5</b>	<b>WH-ADC0912K6E5</b>	<b>WH-ADC16K6E5</b>			
Sound pressure	Heat / Cool	dB(A)		28/28	28/28	28/28	33/33			
Dimension	HxWxD	mm		1642x599x602	1642x599x602	1642x599x602	1642x599x602			
Net weight 3 kW / 6 kW		kg		100/101	100/101	100/101	—/101			
Water pipe connector		Inch		R 1¼	R 1¼	R 1¼	R 1¼			
A class pump	Number of speeds	Variable speed		Variable speed	Variable speed	Variable speed	Variable speed			
	Input power	W		145	145	145	145			
Heating water flow (ΔT=5 K, 35 °C)		L/min		9,2	14,3	20,1	25,8			
Water volume		L		185	185	185	185			
Maximum DHW temperature		°C		65	65	65	65			
Material inside tank		Stainless steel		Stainless steel	Stainless steel	Stainless steel	Stainless steel			
Tapping profile according EN16147		L		L	L	L	L			
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>	A+ to F	A+/A++/A		A+/A++/A	A+/A++/A	A+/A++/A	A+/A/A			
DHW tank ERP average climate η / COP <sub>DHW</sub>	η <sub>wh</sub> %/COP <sub>DHW</sub>	128/3,20		140/3,50	140/3,50	140/3,50	100/2,50			
DHW tank ERP warm climate η / COP <sub>DHW</sub>	η <sub>wh</sub> %/COP <sub>DHW</sub>	154/3,86		160/4,00	160/4,00	160/4,00	116/2,90			
DHW tank ERP cold climate η / COP <sub>DHW</sub>	η <sub>wh</sub> %/COP <sub>DHW</sub>	99/2,48		112/2,80	112/2,80	112/2,80	80/2,00			
<b>Outdoor unit</b>		<b>WH-UDZ03KE5</b>	<b>WH-UDZ05KE5</b>	<b>WH-UDZ07KE5</b>	<b>WH-UDZ09KE5</b>	<b>WH-UDZ12KE5</b>	<b>WH-UDZ16KE5</b>			
Sound power <sup>3)</sup>	Heat	dB(A)		55	55	56	65			
Dimension / Net weight	HxWxD	mm / kg		622x824x298/37	795x875x380/55	795x875x380/55	1340x900x320/88			
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		0,9/0,608	1,3/0,878	1,3/0,878	1,6/1,080			
Piping diameter	Liquid / Gas	Inch (mm)		1/4(6,35)/1/2(12,70)	1/4(6,35)/5/8(15,88)	1/4(6,35)/5/8(15,88)	1/4(6,35)/1/2(12,7)			
Pipe length range / Elevation difference (in / out)		m / m		3-25/20	3-40(3-50) <sup>4)</sup> /30	3-40(3-50) <sup>4)</sup> /30	3-30(3-50) <sup>5)</sup> /20(30) <sup>5)</sup>			
Pre-charged pipe length / Additional gas amount		m / g/m		10/20	10/25	10/25	10/30			
Operating range - outdoor ambient	Heat	°C		-20~+35	-25~+35	-25~+35	-25~+35			
	Cool	°C		+10~+43	+10~+43	+10~+43	+10~+43			
Water outlet <sup>6)</sup>	Heat / Cool	°C		20-60/5-20	20-60/5-20	20-60/5-20	20-60/5-20			
<b>Electrical information</b>		<b>Heater</b>	<b>3 kW</b>	<b>6 kW</b>	<b>3 kW</b>	<b>6 kW</b>	<b>3 kW</b>	<b>6 kW</b>	<b>6 kW</b>	<b>6 kW</b>
Electric backup heater		kW		3,00	6,00	3,00	6,00	3,00	6,00	6,00
Recommended fuse <sup>7)</sup>		A		16/16	16/30	16/16	16/30	25/16	25/30	30/30
Recommended minimum cable size, supply 1 / 2 <sup>7)</sup>		mm <sup>2</sup>		3x1,5/3x1,5	3x1,5/3x4,0	3x1,5/3x4,0	3x2,5/3x4,0	3x2,5/3x4,0	3x4,0/3x4,0	3x4,0/3x4,0

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Operation range down to -25 °C in heating with 3-40 m pipe length range, operation range down to -15 °C in heating with 3-50 m pipe length range. 5) Ambient temperature down to -10 °C. Below -10 °C, permitted piping length and elevation difference is 3-30 m, 20 m. 6) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 7) Check local regulations. \* Available in Summer 2025. Tentative data. \*\* EER and COP calculation is based in accordance to EN 14511. \*\*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

### Aquarea High Performance All in One 185 L K Series. Single phase with Electrical Anode - R32

**Energy efficiency:** COP up to 5,33 / A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,50.

**Flexibility:** 599 x 602 footprint / Built-in magnetic water filter / Installation in harsh water conditions.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features [2 zone control, bivalent control].

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



		Single phase (power to indoor)						
Kit 3 kW electric heater	KIT-	ADC03K3E5AN	ADC05K3E5AN	ADC07K3E5AN	ADC09K3E5AN	—		
Kit 6 kW electric heater	KIT-	ADC03K6E5AN	ADC05K6E5AN	ADC07K6E5AN	ADC09K6E5AN	ADC12K6E5AN	ADC16K6E5AN*	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	3,20/5,33	5,00/5,10	7,00/4,86	9,00/4,55	12,10/4,78	16,00/4,31	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	3,20/2,81	5,00/3,03	7,00/2,92	8,90/2,93	12,00/2,96	14,70/2,72	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	3,20/3,64	5,00/3,57	6,85/3,43	7,00/3,40	11,50/3,44	13,00/3,18	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	3,20/2,19	5,00/2,29	6,25/2,23	6,30/2,18	9,20/2,25	10,00/2,24	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	3,30/2,80	5,00/2,79	5,75/2,95	6,25/2,84	10,10/2,74	11,70/2,61	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	3,20/1,79	5,00/1,89	5,35/1,98	5,90/1,93	8,40/1,97	9,10/1,85	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	3,20/3,52	5,00/3,05	6,70/3,03	8,20/2,72	10,70/2,68	12,20/2,68	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	3,20/4,71	5,00/4,90	6,70/4,72	9,00/4,18	10,70/3,92	13,00/3,80	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	5,07/3,47(200/136)	5,12/3,63(202/142)	4,90/3,62(193/142)	4,44/3,41(175/133)	4,58/3,33(180/130)	4,46/3,40(176/133)	
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	6,20/4,20(245/165)	6,00/4,20(237/165)	5,75/4,07(227/160)	5,75/4,07(227/160)	6,47/4,34(256/171)	6,20/4,30(245/169)	
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,00/2,83(157/110)	4,08/2,95(160/115)	4,18/2,98(164/116)	4,18/2,98(164/116)	4,31/3,26(169/127)	4,28/3,10(168/121)	
	Energy class <sup>1)</sup>	A+++ to D	A++/A+	A++/A+	A++/A+	A++/A++	A++/A+	
Indoor unit 3 kW electric heater	WH-	ADC0309K3E5AN	ADC0309K3E5AN	ADC0309K3E5AN	ADC0309K3E5AN	—		
Indoor unit 6 kW electric heater	WH-	ADC0309K6E5AN	ADC0309K6E5AN	ADC0309K6E5AN	ADC0309K6E5AN	ADC0912K6E5AN	ADC16K6E5AN	
Sound pressure	Heat / Cool	dB(A)		28/28	28/28	28/28	33/33	
Dimension	HxWxD	mm		1642x599x602	1642x599x602	1642x599x602	1642x599x602	
Net weight 3 kW / 6 kW		kg		100/101	100/101	100/101	—/101	
Water pipe connector		Inch		R 1¼	R 1¼	R 1¼	R 1¼	
A class pump	Number of speeds	Variable speed		Variable speed	Variable speed	Variable speed	Variable speed	
	Input power	W		145	145	145	145	
Heating water flow (ΔT=5 K, 35 °C)		L/min		9,2	14,3	20,1	25,8	
Water volume		L		185	185	185	185	
Maximum DHW temperature		°C		65	65	65	65	
Material inside tank		Stainless steel		Stainless steel	Stainless steel	Stainless steel	Stainless steel	
Tapping profile according EN16147		L		L	L	L	L	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F		A+/A++/A	A+/A++/A	A+/A++/A	A+/A/A	
DHW tank ERP average climate η / COPdHW	η <sub>wh</sub> %/COPdHW	128/3,20		140/3,50	140/3,50	140/3,50	100/2,50	
DHW tank ERP warm climate η / COPdHW	η <sub>wh</sub> %/COPdHW	154/3,86		160/4,00	160/4,00	160/4,00	116/2,90	
DHW tank ERP cold climate η / COPdHW	η <sub>wh</sub> %/COPdHW	99/2,48		112/2,80	112/2,80	112/2,80	80/2,00	
Outdoor unit		WH-UDZ03KE5	WH-UDZ05KE5	WH-UDZ07KE5	WH-UDZ09KE5	WH-UDZ12KE5	WH-UDZ16KE5	
Sound power <sup>3)</sup>	Heat	dB(A)		55	55	56	56	
Dimension / Net weight	HxWxD	mm / kg		622x824x298/37	795x875x380/55	795x875x380/55	795x875x380/55	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		0,9/0,608	1,3/0,878	1,3/0,878	1,3/0,878	
Piping diameter	Liquid / Gas	Inch (mm)		1/4(6,35)/1/2(12,70)	1/4(6,35)/5/8(15,88)	1/4(6,35)/5/8(15,88)	1/4(6,35)/5/8(15,88)	
Pipe length range / Elevation difference (in / out)		m / m		3-25/20	3-40(3-50) <sup>4)</sup> /30	3-40(3-50) <sup>4)</sup> /30	3-40(3-50) <sup>4)</sup> /30	
Pre-charged pipe length / Additional gas amount		m / g/m		10/20	10/25	10/25	10/30	
Operating range - outdoor ambient	Heat	°C		-20-+35	-25-+35	-25-+35	-25-+35	
	Cool	°C		+10-+43	+10-+43	+10-+43	+10-+43	
Water outlet <sup>6)</sup>	Heat / Cool	°C		20-60/5-20	20-60/5-20	20-60/5-20	20-60/5-20	
Electrical information	Heater	3 kW	6 kW	3 kW	6 kW	3 kW	6 kW	
Electric backup heater	kW	3,00	6,00	3,00	6,00	3,00	6,00	
Recommended fuse <sup>7)</sup>	A	16/16	16/30	16/16	16/30	25/16	25/30	
Recommended minimum cable size, supply 1 / 2 <sup>7)</sup>	mm <sup>2</sup>	3x1,5/ 3x1,5	3x1,5/ 3x4,0	3x1,5/ 3x1,5	3x1,5/ 3x4,0	3x2,5/ 3x2,5	3x2,5/ 3x4,0	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Operation range down to -25 °C in heating with 3-40 m pipe length range, operation range down to -10 °C in heating with 3-50 m pipe length range. 5) Ambient temperature down to -10 °C. Below -10 °C, permitted piping length and elevation difference is 3-30 m, 20 m. 6) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 7) Check local regulations. \* Available in Summer 2025. Tentative data. \*\* EER and COP calculation is based in accordance to EN 14511. \*\*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
CZ-RTW1	Optional remote controller for 2 zone control. K and L Series
CZ-TAW1C	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
CZ-TAW1-CBL	10 m extension cable for CZ-TAW1C
CZ-NS5P	PCB for advanced functions
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIREDLESS	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## NEW Aquarea High Performance All in One 260 L K Series. Single phase with Electrical Anode- R32

**Energy efficiency:** COP up to 5,33 / A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,08.

**Flexibility:** 260 L DHW tank / 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features [2 zone control, bivalent control].

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



		Single phase [power to indoor]				
Kit		KIT-ADC12K6E53	KIT-ADC16K6E53	KIT-ADC12K6E5AN3	KIT-ADC16K6E5AN3	
Heating capacity / COP [A +7 °C, W 35 °C]	kW / COP	12,10/4,78	16,00/4,31	12,10/4,78	16,00/4,31	
Heating capacity / COP [A +7 °C, W 55 °C]	kW / COP	12,00/2,96	14,70/2,72	12,00/2,96	14,70/2,72	
Heating capacity / COP [A +2 °C, W 35 °C]	kW / COP	11,50/3,44	13,00/3,18	11,50/3,44	13,00/3,18	
Heating capacity / COP [A +2 °C, W 55 °C]	kW / COP	9,20/2,25	10,00/2,24	9,20/2,25	10,00/2,24	
Heating capacity / COP [A -7 °C, W 35 °C]	kW / COP	10,10/2,74	11,70/2,61	10,10/2,74	11,70/2,61	
Heating capacity / COP [A -7 °C, W 55 °C]	kW / COP	8,40/1,97	9,10/1,85	8,40/1,97	9,10/1,85	
Cooling capacity / EER [A 35 °C, W 7 °C]	kW / EER	10,70/2,68	12,20/2,68	10,70/2,68	12,20/2,68	
Cooling capacity / EER [A 35 °C, W 18 °C]	kW / EER	10,70/3,92	13,00/3,80	10,70/3,92	13,00/3,80	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP [ $\eta_{s, \text{H}}$ %]	4,58/3,33 [180/130]	4,46/3,40 [176/133]	4,58/3,33 [180/130]	4,46/3,40 [176/133]
	Energy class <sup>1)</sup>		A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP [ $\eta_{s, \text{W}}$ %]	6,47/4,34 [256/171]	6,20/4,30 [245/169]	6,47/4,34 [256/171]	6,20/4,30 [245/169]
	Energy class <sup>1)</sup>		A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP [ $\eta_{s, \text{C}}$ %]	4,31/3,26 [169/127]	4,28/3,10 [168/121]	4,31/3,26 [169/127]	4,28/3,10 [168/121]
	Energy class <sup>1)</sup>		A+++ to D	A++ / A++	A++ / A++	A++ / A+
<b>Indoor unit</b>		<b>WH-ADC0912K6E53</b>	<b>WH-ADC16K6E53</b>	<b>WH-ADC0912K6E5AN3</b>	<b>WH-ADC16K6E5AN3</b>	
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	
Dimension	H x W x D	mm	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	
Net weight		kg	119	119	120	
Water pipe connector		Inch	R 1½	R 1½	R 1½	
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	
	Input power	W	145	145	145	
Heating water flow ( $\Delta T=5$ K, 35 °C)		L/min	34,4	34,4	45,8	
Water volume		L	185	185	185	
Maximum DHW temperature		°C	65	65	65	
Material inside tank			Stainless steel	Stainless steel	Stainless steel	
Tapping profile according EN16147			L	L	L	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A+ / A / A	A+ / A / A	A+ / A / A	
DHW tank ERP average climate $\eta$ / COP <sub>DHW</sub>	$\eta_{\text{wh}} \%$ / COP <sub>DHW</sub>		100/2,50	100/2,50	100/2,50	
DHW tank ERP warm climate $\eta$ / COP <sub>DHW</sub>	$\eta_{\text{wh}} \%$ / COP <sub>DHW</sub>		116/2,90	116/2,90	116/2,90	
DHW tank ERP cold climate $\eta$ / COP <sub>DHW</sub>	$\eta_{\text{wh}} \%$ / COP <sub>DHW</sub>		80/2,00	80/2,00	80/2,00	
<b>Outdoor unit</b>		<b>WH-UDZ12KE5</b>	<b>WH-UDZ16KE5</b>	<b>WH-UDZ12KE5</b>	<b>WH-UDZ16KE5</b>	
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	
Dimension / Net weight	H x W x D	mm / kg	1340 x 900 x 320 / 88	1340 x 900 x 320 / 88	1340 x 900 x 320 / 88	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,6 / 1,080	1,6 / 1,080	1,6 / 1,080	
Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35) / 1/2 (12,7)	1/4 (6,35) / 5/8 (15,88)	1/4 (6,35) / 1/2 (12,7)	
Pipe length range / Elevation difference [in / out]		m / m	3-30 [3-50] <sup>5)</sup> / 20 [30] <sup>5)</sup>	3-30 [3-50] <sup>5)</sup> / 20 [30] <sup>5)</sup>	3-30 [3-50] <sup>5)</sup> / 20 [30] <sup>5)</sup>	
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35	
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	
Water outlet	Heat / Cool	°C	20 ~ 60 / 5 ~ 20	20 ~ 60 / 5 ~ 20	20 ~ 60 / 5 ~ 20	
<b>Electrical information</b>		<b>WH-ADC0912K6E53</b>	<b>WH-ADC16K6E53</b>	<b>WH-ADC0912K6E5AN3</b>	<b>WH-ADC16K6E5AN3</b>	
Electric backup heater		kW	6,00	6,00	6,00	
Recommended fuse <sup>5)</sup>		A	30/30	30/30	30/30	
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x4,0 / 3x4,0	3x4,0 / 3x4,0	3x4,0 / 3x4,0	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 4) Operation range down to -25 °C in heating with 3~40 m pipe length range, operation range down to -15 °C in heating with 3~50 m pipe length range. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard [EU] 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## Aquarea High Performance All in One 185 L K Series. Single phase 2 zones - R32

**Energy efficiency:** COP up to 5,33 / A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / DHW COP up to 3,50.

**Flexibility:** 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter / 2 zone control.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



		Single phase (power to indoor)				
Kit		KIT-ADC03K3E5B	KIT-ADC05K3E5B	KIT-ADC07K3E5B	KIT-ADC09K3E5B	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	3,20/5,33	5,00/5,10	7,00/4,86	9,00/4,55	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	3,20/2,81	5,00/3,03	7,00/2,92	8,90/2,93	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	3,20/3,64	5,00/3,57	6,85/3,43	7,00/3,40	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	3,20/2,19	5,00/2,29	6,25/2,23	6,30/2,18	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	3,30/2,80	5,00/2,79	5,75/2,95	6,25/2,84	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	3,20/1,79	5,00/1,89	5,35/1,98	5,90/1,93	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	3,20/3,52	5,00/3,05	6,70/3,03	8,20/2,72	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	3,20/4,71	5,00/4,90	6,70/4,72	9,00/4,18	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,07/3,47 [200/136]	5,12/3,63 [202/142]	4,90/3,62 [193/142]	4,44/3,41 [175/133]
	Energy class <sup>1)</sup>		A+++ to D	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,20/4,20 [245/165]	6,00/4,20 [237/165]	5,75/4,07 [227/160]	5,75/4,07 [227/160]
	Energy class <sup>1)</sup>		A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,00/2,83 [157/110]	4,08/2,95 [160/115]	4,18/2,98 [164/116]	4,18/2,98 [164/116]
	Energy class <sup>1)</sup>		A+++ to D	A++/A+	A++/A+	A++/A+
<b>Indoor unit</b>		<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	
Sound pressure	Heat / Cool	dB(A)	28/28	28/28	28/28	
Dimension	H x W x D	mm	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	
Net weight		kg	109	109	109	
Water pipe connector		Inch	R 1¼	R 1¼	R 1¼	
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	
	Input power (Min/Max)	W	30/120	30/120	30/120	
Heating water flow (ΔT=5 K, 35 °C)		L/min	9,2	14,3	20,1	
Water volume		L	185	185	185	
Maximum DHW temperature		°C	65	65	65	
Material inside tank			Stainless steel	Stainless steel	Stainless steel	
Tapping profile according EN16147			L	L	L	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A+/A++/A	A+/A++/A	A+/A++/A	
DHW tank ERP average climate η / COP <sub>DHW</sub>	η <sub>wh</sub> % / COP <sub>DHW</sub>		128/3,20	140/3,50	140/3,50	
DHW tank ERP warm climate η / COP <sub>DHW</sub>	η <sub>wh</sub> % / COP <sub>DHW</sub>		154/3,86	160/4,00	160/4,00	
DHW tank ERP cold climate η / COP <sub>DHW</sub>	η <sub>wh</sub> % / COP <sub>DHW</sub>		99/2,48	112/2,80	112/2,80	
<b>Outdoor unit</b>		<b>WH-UDZ03KE5</b>	<b>WH-UDZ05KE5</b>	<b>WH-UDZ07KE5</b>	<b>WH-UDZ09KE5</b>	
Sound power <sup>3)</sup>	Heat	dB(A)	55	55	56	
Dimension / Net weight	H x W x D	mm / kg	622 x 824 x 298/37	795 x 875 x 380/55	795 x 875 x 380/55	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0,9/0,608	1,3/0,878	1,3/0,878	
Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35) / 1/2 (12,70)	1/4 (6,35) / 5/8 (15,88)	1/4 (6,35) / 5/8 (15,88)	
Pipe length range / Elevation difference (in / out)		m / m	3 ~ 25/20	3 ~ 40 (3 ~ 50) <sup>4)</sup> / 30	3 ~ 40 (3 ~ 50) <sup>4)</sup> / 30	
Pre-charged pipe length / Additional gas amount		m / g/m	10/20	10/25	10/25	
Operating range - outdoor ambient	Heat	°C	-20 ~ +35	-25 ~ +35	-25 ~ +35	
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	
Water outlet	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	
<b>Electrical information</b>		<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	<b>WH-ADC0309K3E5B</b>	
Electric backup heater		kW	3,00	3,00	3,00	
Recommended fuse <sup>5)</sup>		A	16/16	16/16	25/16	
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x1,5/3x1,5	3x1,5/3x1,5	3x2,5/3x1,5	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 4) Operation range down to -25 °C in heating with 3-40 m pipe length range, operation range down to -15 °C in heating with 3-50 m pipe length range. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.



## Aquarea High Performance All in One 185 L K Series. Three phase - R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel.

**Flexibility:** 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features [2 zone control, bivalent control].

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Three phase (power to indoor)					
Kit			KIT-ADC09K9E8	KIT-ADC12K9E8	KIT-ADC16K9E8
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	9,00/4,90	12,10/4,78	16,00/4,31
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	9,00/2,97	12,00/2,96	14,70/2,72
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	9,00/3,63	11,50/3,44	13,20/3,28
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	9,00/2,26	9,20/2,25	10,00/2,21
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	9,00/2,88	10,10/2,74	11,60/2,57
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	8,10/2,07	8,40/1,97	9,10/1,85
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	8,80/3,11	10,70/2,68	13,40/2,64
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	8,80/4,63	10,70/3,92	15,50/3,60
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,58/3,33(180/130)	4,46/3,40(176/133)
	Energy class <sup>1)</sup>		A+++ / A++	A+++ / A++	A+++ / A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,20/4,30(245/169)
	Energy class <sup>1)</sup>		A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,28/3,10(168/121)
	Energy class <sup>1)</sup>		A++ / A++	A++ / A++	A++ / A+
<b>Indoor unit</b>			<b>WH-ADC0912K9E8</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC16K9E8</b>
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33
Dimension	HxWxD	mm	1642x599x602	1642x599x602	1642x599x602
Net weight		kg	102	102	103
Water pipe connector		Inch	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power	W	145	145	145
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	45,9
Water volume		L	185	185	185
Maximum DHW temperature		°C	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			L	L	L
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>			A+ / A+ / A	A+ / A+ / A	A+ / A+ / A
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> % / COPdHW	100/2,50	100/2,50	96/2,40
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> % / COPdHW	116/2,90	116/2,90	115/2,88
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> % / COPdHW	80/2,00	80/2,00	76/1,90
<b>Outdoor unit</b>			<b>WH-UDZ09KE8</b>	<b>WH-UDZ12KE8</b>	<b>WH-UDZ16KE8</b>
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65
Dimension / Net weight	HxWxD	mm / kg	1340x900x320/90	1340x900x320/90	1340x900x320/103
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,83/1,235
Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35) / 1/2 (12,70)	1/4 (6,35) / 1/2 (12,70)	1/4 (6,35) / 1/2 (12,70)
Pipe length range / Elevation difference (in / out)		m / m	3~30/20	3~30/20	3~30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet <sup>4)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20
<b>Electrical information</b>			<b>WH-ADC0912K9E8</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC16K9E8</b>
Electric backup heater		kW	9,00	9,00	9,00
Recommended fuse <sup>5)</sup>		A	20/20	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

### Aquarea High Performance All in One 185 L K Series. Three phase with Electrical Anode - R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel.

**Flexibility:** 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter / Installation in harsh water conditions.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



				Three phase (power to indoor)		
Kit			KIT-ADC09K9E8AN	KIT-ADC12K9E8AN	KIT-ADC16K9E8AN	
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	9,00/4,90	12,10/4,78	16,00/4,31	
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	9,00/2,97	12,00/2,96	14,70/2,72	
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	9,00/3,63	11,50/3,44	13,20/3,28	
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	9,00/2,26	9,20/2,25	10,00/2,21	
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	9,00/2,88	10,10/2,74	11,60/2,57	
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	8,10/2,07	8,40/1,97	9,10/1,85	
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	8,80/3,11	10,70/2,68	13,40/2,64	
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	8,80/4,63	10,70/3,92	15,50/3,60	
Heating average climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,58/3,33(180/130)	4,46/3,40(176/133)	
		Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	
Heating warm climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,20/4,30(245/169)	
		Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	
Heating cold climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,28/3,10(168/121)	
		Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A+	
<b>Indoor unit</b>			<b>WH-ADC0912K9E8AN</b>	<b>WH-ADC0912K9E8AN</b>	<b>WH-ADC16K9E8AN</b>	
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	
Dimension	H x W x D	mm	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	
Net weight		kg	102	102	103	
Water pipe connector		Inch	R 1/4	R 1/4	R 1/4	
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	
	Input power	W	145	145	145	
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	45,9	
Water volume		L	185	185	185	
Maximum DHW temperature		°C	65	65	65	
Material inside tank			Stainless steel	Stainless steel	Stainless steel	
Tapping profile according EN16147			L	L	L	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A/A+/A	A/A+/A	A/A+/A	
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> %/COPdHW	100/2,50	100/2,50	96/2,40	
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> %/COPdHW	116/2,90	116/2,90	115/2,88	
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> %/COPdHW	80/2,00	80/2,00	76/1,90	
<b>Outdoor unit</b>			<b>WH-UDZ09KE8</b>	<b>WH-UDZ12KE8</b>	<b>WH-UDZ16KE8</b>	
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	
Dimension / Net weight	H x W x D	mm / kg	1340 x 900 x 320/90	1340 x 900 x 320/90	1340 x 900 x 320/103	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,83/1,235	
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	
Pipe length range / Elevation difference (in / out)		m / m	3-30/20	3-30/20	3-30/20	
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35	
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	
Water outlet <sup>4)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	
<b>Electrical information</b>			<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC16K9E8AN3</b>	
Electric backup heater		kW	9,00	9,00	9,00	
Recommended fuse <sup>5)</sup>		A	20/20	20/20	20/20	
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## NEW Aquarea High Performance All in One 260 L K Series. Three phase - R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel.

**Flexibility:** 260 L DHW tank / 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



				Three phase (power to indoor)		
Kit			KIT-ADC09K9E83	KIT-ADC12K9E83	KIT-ADC16K9E83	
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	9,00/4,90	12,10/4,78	16,00/4,31	
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	9,00/2,97	12,00/2,96	14,70/2,72	
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	9,00/3,63	11,50/3,44	13,20/3,28	
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	9,00/2,26	9,20/2,25	10,00/2,21	
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	9,00/2,88	10,10/2,74	11,60/2,57	
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	8,10/2,07	8,40/1,97	9,10/1,85	
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	8,80/3,11	10,70/2,68	13,40/2,64	
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	8,80/4,63	10,70/3,92	15,50/3,60	
Heating average climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,58/3,33(180/130)	4,46/3,40(176/133)	
		Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	
Heating warm climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,20/4,30(245/169)	
		Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	
Heating cold climate (W 35 °C / W 55 °C)		Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,28/3,10(168/121)	
		Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A+	
<b>Indoor unit</b>			<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>	
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	
Dimension	HxWxD	mm	2036x599x602	2036x599x602	2036x599x602	
Net weight		kg	119	119	120	
Water pipe connector		Inch	R 1½	R 1½	R 1½	
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	
	Input power	W	145	145	145	
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	46,0	
Water volume		L	260	260	260	
Maximum DHW temperature		°C	65	65	65	
Material inside tank			Stainless steel	Stainless steel	Stainless steel	
Tapping profile according EN16147			XL	XL	XL	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A+/A+/A	A+/A+/A	A+/A+/A	
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> %/COPdHW	123/3,08	123/3,08	98/2,45	
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> %/COPdHW	134/3,35	134/3,35	123/3,08	
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> %/COPdHW	94/2,35	94/2,35	80/2,00	
<b>Outdoor unit</b>			<b>WH-UDZ09KE8</b>	<b>WH-UDZ12KE8</b>	<b>WH-UDZ16KE8</b>	
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	
Dimension / Net weight	HxWxD	mm / kg	1340x900x320/90	1340x900x320/90	1340x900x320/103	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,83/1,235	
Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35)/1/2 (12,70)	1/4 (6,35)/1/2 (12,70)	1/4 (6,35)/1/2 (12,70)	
Pipe length range / Elevation difference (in / out)		m / m	3~30/20	3~30/20	3~30/20	
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	
Operating range - outdoor ambient	Heat	°C	-25~+35	-25~+35	-25~+35	
	Cool	°C	+10~+43	+10~+43	+10~+43	
Water outlet	Heat / Cool	°C	20~60/5~20	20~60/5~20	20~60/5~20	
<b>Electrical information</b>			<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>	
Electric backup heater		kW	9,00	9,00	9,00	
Recommended fuse <sup>5)</sup>		A	20/20	20/20	20/20	
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 4) Operation range down to -25 °C in heating with 3~40 m pipe length range, operation range down to -15 °C in heating with 3~50 m pipe length range. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## NEW Aquarea High Performance All in One 260 L K Series. Three phase with Electrical Anode - R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel.

**Flexibility:** 260 L DHW tank / 599 x 602 footprint / Easy access to hydraulic parts / Built-in magnetic water filter / Installation in harsh water conditions.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



		Three phase (power to indoor)			
Kit		KIT-ADC09K9E8AN3	KIT-ADC12K9E8AN3	KIT-ADC16K9E8AN3	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/4,90	12,10/4,78	16,00/4,31	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/2,97	12,00/2,96	14,70/2,72	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,63	11,50/3,44	13,20/3,28	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,26	9,20/2,25	10,00/2,21	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/2,88	10,10/2,74	11,60/2,57	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	8,10/2,07	8,40/1,97	9,10/1,85	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	8,80/3,11	10,70/2,68	13,40/2,64	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	8,80/4,63	10,70/3,92	15,50/3,60	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,58/3,33(180/130)	4,46/3,40(176/133)	
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,20/4,30(245/169)	
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,28/3,10(168/121)	
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A+	
<b>Indoor unit</b>		<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC16K9E8AN3</b>	
Sound pressure	Heat / Cool	33/33		33/33	
Dimension	H x W x D	2036 x 599 x 602		2036 x 599 x 602	
Net weight		119		120	
Water pipe connector		R 1¼		R 1¼	
A class pump	Number of speeds	Variable speed		Variable speed	
	Input power	145		145	
Heating water flow (ΔT=5 K, 35 °C)	L/min	25,8		34,4	
Water volume	L	260		260	
Maximum DHW temperature	°C	65		65	
Material inside tank		Stainless steel		Stainless steel	
Tapping profile according EN16147		XL		XL	
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>	A+ to F	A+/A+/A		A+/A+/A	
DHW tank ERP average climate η / COPdHW	η <sub>wh</sub> %/COPdHW	123/3,08		98/2,45	
DHW tank ERP warm climate η / COPdHW	η <sub>wh</sub> %/COPdHW	134/3,35		123/3,08	
DHW tank ERP cold climate η / COPdHW	η <sub>wh</sub> %/COPdHW	94/2,35		80/2,00	
<b>Outdoor unit</b>		<b>WH-UDZ09KE8</b>	<b>WH-UDZ12KE8</b>	<b>WH-UDZ16KE8</b>	
Sound power <sup>3)</sup>	Heat	65		65	
Dimension / Net weight	H x W x D	1340 x 900 x 320/90		1340 x 900 x 320/103	
Refrigerant (R32) / CO <sub>2</sub> Eq.	kg / T	1,60/1,080		1,83/1,235	
Piping diameter	Liquid / Gas	1/4 (6,35) / 1/2 (12,70)		1/4 (6,35) / 1/2 (12,70)	
Pipe length range / Elevation difference (in / out)	m / m	3 - 30/20		3 - 30/20	
Pre-charged pipe length / Additional gas amount	m / g/m	10/30		10/30	
Operating range - outdoor ambient	Heat	-25 ~ +35		-25 ~ +35	
	Cool	+10 ~ +43		+10 ~ +43	
Water outlet	Heat / Cool	20 ~ 60/5 ~ 20		20 ~ 60/5 ~ 20	
<b>Electrical information</b>		<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC0912K9E8AN3</b>	<b>WH-ADC16K9E8AN3</b>	
Electric backup heater	kW	9,00		9,00	
Recommended fuse <sup>5)</sup>	A	20/20		20/20	
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>	mm <sup>2</sup>	5x1,5/5x1,5		5x1,5/5x1,5	

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. 4) Operation range down to -25 °C in heating with 3-40 m pipe length range, operation range down to -15 °C in heating with 3-50 m pipe length range. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.



## Aquarea High Performance Bi-bloc K Series. Single phase - SDC · R32

**Energy efficiency:** COP up to 5,33 / A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Long piping lengths / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



		Single phase (power to indoor)									
Kit 3 kW electric heater		KIT-WC03K3E5	KIT-WC05K3E5	KIT-WC07K3E5	KIT-WC09K3E5	—					
Kit 6 kW electric heater		KIT-WC03K6E5	KIT-WC05K6E5	KIT-WC07K6E5	KIT-WC09K6E5	KIT-WC12K6E5	KIT-WC16K6E5				
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	3,20/5,33	5,00/5,10	7,00/4,86	9,00/4,55	12,10/4,78	16,00/4,31				
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	3,20/2,81	5,00/3,03	7,00/2,92	8,90/2,93	12,00/2,96	14,70/2,72				
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	3,20/3,64	5,00/3,57	6,85/3,43	7,00/3,40	11,50/3,44	13,00/3,18				
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	3,20/2,19	5,00/2,29	6,25/2,23	6,30/2,18	9,20/2,25	10,00/2,24				
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	3,30/2,80	5,00/2,79	5,75/2,95	6,25/2,84	10,10/2,74	11,70/2,61				
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	3,20/1,79	5,00/1,89	5,35/1,98	5,90/1,93	8,40/1,97	9,10/1,85				
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	3,20/3,52	5,00/3,05	6,70/3,03	8,20/2,72	10,70/2,68	12,20/2,68				
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	3,20/4,71	5,00/4,90	6,70/4,72	9,00/4,18	10,70/3,92	13,00/3,80				
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,07/3,47(200/136)	5,12/3,63(202/142)	4,90/3,62(193/142)	4,44/3,41(175/133)	4,58/3,33(180/130)	4,46/3,40(176/133)			
	Energy class <sup>1)</sup>	A+++ to D	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++			
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,20/4,20(245/165)	6,00/4,20(237/165)	5,75/4,07(227/160)	5,75/4,07(227/160)	6,47/4,34(256/171)	6,20/4,30(245/169)			
	Energy class <sup>1)</sup>	A+++ to D	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++			
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,00/2,83(157/110)	4,08/2,95(160/115)	4,18/2,98(164/116)	4,18/2,98(164/116)	4,31/3,26(169/127)	4,28/3,10(168/121)			
	Energy class <sup>1)</sup>	A+++ to D	A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A++	A++ / A+			
<b>Indoor unit 3 kW electric heater</b>		<b>WH-</b>	<b>SDC0309K3E5</b>	<b>SDC0309K3E5</b>	<b>SDC0309K3E5</b>	<b>SDC0309K3E5</b>	—				
<b>Indoor unit 6 kW electric heater</b>		<b>WH-</b>	<b>SDC0309K6E5</b>	<b>SDC0309K6E5</b>	<b>SDC0309K6E5</b>	<b>SDC0309K6E5</b>	<b>SDC12K6E5</b>	<b>SDC16K6E5</b>			
Sound pressure	Heat / Cool	dB(A)	28/28	28/28	30/30	30/31	33/33	33/33			
Dimension	H x W x D	mm	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348			
Net weight 3 kW / 6 kW		kg	40/41	40/41	40/41	40/41	41	41			
Water pipe connector		Inch	R 1¼	R 1¼	R 1¼	R 1¼	R 1¼	R 1¼			
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed			
	Input power	W	145	145	145	145	145	145			
Heating water flow (ΔT=5 K, 35 °C)		L/min	9,2	14,3	20,1	25,8	34,4	45,8			
<b>Outdoor unit</b>			<b>WH-UDZ03KE5</b>	<b>WH-UDZ05KE5</b>	<b>WH-UDZ07KE5</b>	<b>WH-UDZ09KE5</b>	<b>WH-UDZ12KE5</b>	<b>WH-UDZ16KE5</b>			
Sound power <sup>2)</sup>	Heat	dB(A)	55	55	56	56	65	65			
Dimension	H x W x D	mm	622 x 824 x 298	795 x 875 x 380	795 x 875 x 380	795 x 875 x 380	1340 x 900 x 320	1340 x 900 x 320			
Net weight		kg	37	55	55	55	88	88			
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0,9/0,608	1,3/0,878	1,3/0,878	1,3/0,878	1,6/1,080	1,6/1,080			
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/5/8(15,88)	1/4(6,35)/5/8(15,88)	1/4(6,35)/5/8(15,88)	1/4(6,35)/1/2(12,7)	1/4(6,35)/5/8(15,88)			
Pipe length range		m	3 ~ 25	3 ~ 40 (3 ~ 50) <sup>3)</sup>	3 ~ 40 (3 ~ 50) <sup>3)</sup>	3 ~ 40 (3 ~ 50) <sup>3)</sup>	3 ~ 30	3 ~ 30			
Elevation difference (in / out)		m	20	30	30	30	20	20			
Pre-charged pipe length		m	10	10	10	10	10	10			
Additional gas amount		g/m	20	25	25	25	30	30			
Operating range - outdoor ambient	Heat	°C	-20 ~ +35	-25 ~ +35	-25 ~ +35	-25 ~ +35	-25 ~ +35	-25 ~ +35			
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43			
Water outlet <sup>4)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20			
<b>Electrical information</b>		<b>Heater</b>	<b>3 kW</b>	<b>6 kW</b>	<b>3 kW</b>	<b>6 kW</b>	<b>3 kW</b>	<b>6 kW</b>	<b>6 kW</b>	<b>6 kW</b>	<b>6 kW</b>
Electric backup heater		kW	3,00	6,00	3,00	6,00	3,00	6,00	6,00	6,00	6,00
Recommended fuse <sup>5)</sup>		A	16/16	16/30	16/16	16/30	25/16	25/30	25/16	25/30	30/30
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x1,5/ 3x1,5	3x1,5/ 3x4,0	3x1,5/ 3x1,5	3x1,5/ 3x4,0	3x2,5/ 3x4,0	3x2,5/ 3x4,0	3x2,5/ 3x4,0	3x4,0/3x4,0	3x4,0/3x4,0

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825. 3) Operation range down to -25 °C in heating with 3~40 m pipe length range, operation range down to -15 °C in heating with 3~50 m pipe length range. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

## Accessories

<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>CZ-NV2</b>	3 way valve kit to fit inside the hydrokit. K and L Series

## Accessories

<b>PAW-BTANK50L-2</b>	Buffer tank 50 L
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

**Aquarea High Performance Bi-bloc K Series. Three phase - SDC · R32**

**Energy efficiency:** A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Long piping lengths / Built-in magnetic water filter.

**Comfort:** Operation without backup heating at -25 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



				Three phase (power to indoor)			
Kit 3 kW electric heater		KIT-WC09K3E8		—		—	
Kit 9 kW electric heater		KIT-WC09K9E8		KIT-WC12K9E8		KIT-WC16K9E8	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00 / 4,90		12,10 / 4,78		16,00 / 4,31	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00 / 2,97		12,00 / 2,96		14,70 / 2,72	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00 / 3,63		11,50 / 3,44		13,20 / 3,28	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00 / 2,26		9,20 / 2,25		10,00 / 2,21	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00 / 2,88		10,10 / 2,74		11,60 / 2,57	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	8,10 / 2,07		8,40 / 1,97		9,10 / 1,85	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	8,80 / 3,11		10,70 / 2,68		13,40 / 2,64	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	8,80 / 4,63		10,70 / 3,92		15,50 / 3,60	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96 / 3,57 (195 / 140)	4,58 / 3,33 (180 / 130)	4,46 / 3,40 (176 / 133)		
	Energy class <sup>1)</sup>		A+++ / A++	A+++ / A++	A+++ / A++		
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47 / 4,34 (256 / 171)	6,47 / 4,34 (256 / 171)	6,20 / 4,30 (245 / 169)		
	Energy class <sup>1)</sup>		A+++ / A+++	A+++ / A+++	A+++ / A+++		
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31 / 3,26 (169 / 127)	4,31 / 3,26 (169 / 127)	4,28 / 3,10 (168 / 121)		
	Energy class <sup>1)</sup>		A++ / A++	A++ / A++	A++ / A+		
Indoor unit 3 kW electric heater		WH-SDC09K3E8		—		—	
Indoor unit 9 kW electric heater		WH-SDC09K9E8		WH-SDC12K9E8		WH-SDC16K9E8	
Sound pressure	Heat / Cool	dB(A)	33 / 33	33 / 33	33 / 33		
Dimension	H x W x D	mm	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348		
Net weight 3 kW / 9 kW		kg	40 / 41	— / 41	— / 41		
Water pipe connector		Inch	R 1¼	R 1¼	R 1¼		
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed		
	Input power	W	145	145	145		
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	45,9		
Outdoor unit		WH-UDZ09KE8		WH-UDZ12KE8		WH-UDZ16KE8	
Sound power <sup>2)</sup>	Heat	dB(A)	65	65	65		
Dimension	H x W x D	mm	1340 x 900 x 320	1340 x 900 x 320	1340 x 900 x 320		
Net weight		kg	90	90	103		
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60 / 1,080	1,60 / 1,080	1,83 / 1,235		
Piping diameter	Liquid / Gas	Inch (mm)	1/4 (6,35) / 1/2 (12,70)	1/4 (6,35) / 1/2 (12,70)	1/4 (6,35) / 1/2 (12,70)		
Pipe length range		m	3 - 30	3 - 30	3 - 30		
Elevation difference (in / out)		m	20	20	20		
Pre-charged pipe length		m	10	10	10		
Additional gas amount		g/m	30	30	30		
Operating range - outdoor ambient	Heat	°C	-25 ~ +35	-25 ~ +35	-25 ~ +35		
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43		
Water outlet <sup>3)</sup>	Heat / Cool	°C	20 ~ 60 / 5 ~ 20	20 ~ 60 / 5 ~ 20	20 ~ 60 / 5 ~ 20		
Electrical information		3 kW heater		9 kW heater		9 kW heater	
Electric backup heater		kW	3,00	9,00	9,00	9,00	
Recommended fuse <sup>4)</sup>		A	20 / 15 / 16	20 / 20	20 / 20	20 / 20	
Recommended minimum cable size, supply 1 / 2 <sup>4)</sup>		mm <sup>2</sup>	5x1,5 / 3x1,5	5x1,5 / 5x1,5	5x1,5 / 5x1,5	5x2,5 / 5x1,5	

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825. 3) Operation range down to -25 °C in heating with 3-40 m pipe length range, operation range down to -15 °C in heating with 3-50 m pipe length range. 4) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>CZ-NV2</b>	3 way valve kit to fit inside the hydrokit. K and L Series

Accessories	
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## Aquarea K Series

Aquarea K Series gives you even more.

Highly efficient Panasonic solutions can help to significantly reduce the energy consumption of the house, at the same time a high level of comfort and good indoor air quality are kept.



### Ventilation unit on top for a low-energy house

Heat recovery ventilation units are ideal for homes, for these owners who are looking for high performance and maximum comfort.

Combine the Residential ventilation unit with Panasonic Aquarea for an space saving and highly efficient solution for heating, cooling, ventilation and DHW.

### Aquarea + PV panels

Aquarea Heat Pumps can synchronise with PV panels, using the optional PCB CZ-NS5P. Thanks to this feature, demand of heating, cooling and domestic hot water production is adapted to the PV panel production.

### Smart Grid Ready

Aquarea K Series heat pumps in combination with the optional PCB CZ-NS5P hold the SG Ready function, allowing the heat pump to be connected in an intelligent grid control.

**Remote controller designed in harmony with the whole system, with optimised user interface and improved features.**

#### Smart bivalency.

Cost effective bivalent mode with power tariff logic.

#### Optimised user interface.

Each touch point designed in harmony, with optimised user interface across the range.

#### Dual controller system.

A dual controller system, for independent control of two zones, within the home.



**Aquarea T-CAP All in One 185 L K Series. Single phase / Three phase · R32**

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / Built-in flow meter.

**Flexibility:** 599 x 602 footprint / Built-in magnetic water filter.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Kit	Single phase (power to indoor)				Three phase (power to indoor)		
	KIT-AXC09K6E5	KIT-AXC12K6E5	KIT-AXC09K9E8	KIT-AXC12K9E8	KIT-AXC16K9E8		
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>			<b>WH-ADC0912K6E5</b>	<b>WH-ADC0912K6E5</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC16K9E8</b>
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	33/33	33/33
Dimension	H x W x D	mm	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602
Net weight		kg	101	101	102	102	103
Water pipe connector		Inch	R 1½	R 1½	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power	W	145	145	145	145	173
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Water volume		L	185	185	185	185	185
Maximum DHW temperature		°C	65	65	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			L	L	L	L	L
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A/A+/A	A/A+/A	A/A+/A	A/A+/A	A/A+/A
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> % / COPdHW	112/2,80	112/2,80	112/2,80	112/2,80	107/2,68
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> % / COPdHW	132/3,30	132/3,30	132/3,30	132/3,30	128/3,20
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> % / COPdHW	88/2,20	88/2,20	88/2,20	88/2,20	84/2,10
<b>Outdoor unit</b>			<b>WH-UXZ09KE5</b>	<b>WH-UXZ12KE5</b>	<b>WH-UXZ09KE8</b>	<b>WH-UXZ12KE8</b>	<b>WH-UXZ16KE8</b>
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	65	65
Dimension / Net weight	H x W x D	mm / kg	1340 x 900 x 320/88	1340 x 900 x 320/88	1340 x 900 x 320/90	1340 x 900 x 320/90	1340 x 900 x 320/103
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)
Pipe length range / Elevation difference (in / out)		m / m	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	10/30	10/30
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet <sup>4)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20
<b>Electrical information</b>			<b>WH-ADC0912K6E5</b>	<b>WH-ADC0912K6E5</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC0912K9E8</b>	<b>WH-ADC16K9E8</b>
Electric backup heater		kW	6,00	6,00	9,00	9,00	9,00
Recommended fuse <sup>5)</sup>		A	30/30	30/30	20/20	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.



## Aquarea T-CAP All in One 185 L K Series. Single phase / Three phase with Electrical Anode · R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / Built-in flow meter.

**Flexibility:** 599 x 602 footprint / Built-in magnetic water filter.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Kit	Single phase (power to indoor)			Three phase (power to indoor)			
	KIT-AXC09K6E5AN	KIT-AXC12K6E5AN	KIT-AXC09K9E8AN	KIT-AXC12K9E8AN	KIT-AXC16K9E8AN		
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP		9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP		9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP		9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP		9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP		9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP		9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER		8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER		8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)
	Energy class <sup>1)</sup>		A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)
	Energy class <sup>1)</sup>		A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>		A+++ to D	A++/A++	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>	<b>WH-</b>	<b>ADC0912K6E5AN</b>	<b>ADC0912K6E5AN</b>	<b>ADC0912K9E8AN</b>	<b>ADC0912K9E8AN</b>	<b>ADC16K9E8AN</b>	
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	33/33	33/33
Dimension	H x W x D	mm	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602	1642 x 599 x 602
Net weight		kg	101	101	102	102	103
Water pipe connector		Inch	R 1½	R 1½	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power	W	145	145	145	145	173
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Water volume		L	185	185	185	185	185
Maximum DHW temperature		°C	65	65	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			L	L	L	L	L
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A/A+/A	A/A+/A	A/A+/A	A/A+/A	A/A+/A
DHW tank ERP average climate η / COP <sub>DHW</sub>		η <sub>wh</sub> % / COP <sub>DHW</sub>	112/2,80	112/2,80	112/2,80	112/2,80	107/2,68
DHW tank ERP warm climate η / COP <sub>DHW</sub>		η <sub>wh</sub> % / COP <sub>DHW</sub>	132/3,30	132/3,30	132/3,30	132/3,30	128/3,20
DHW tank ERP cold climate η / COP <sub>DHW</sub>		η <sub>wh</sub> % / COP <sub>DHW</sub>	88/2,20	88/2,20	88/2,20	88/2,20	84/2,10
<b>Outdoor unit</b>	<b>WH-UXZ09KE5</b>	<b>WH-UXZ12KE5</b>	<b>WH-UXZ09KE8</b>	<b>WH-UXZ12KE8</b>	<b>WH-UXZ16KE8</b>		
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	65	65
Dimension / Net weight	H x W x D	mm / kg	1340 x 900 x 320/88	1340 x 900 x 320/88	1340 x 900 x 320/90	1340 x 900 x 320/90	1340 x 900 x 320/103
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)
Pipe length range / Elevation difference (in / out)		m / m	3~30/20	3~30/20	3~30/20	3~30/20	3~30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	10/30	10/30
Operating range - outdoor ambient	Heat	°C	-28~+35	-28~+35	-28~+35	-28~+35	-28~+35
	Cool	°C	+10~+43	+10~+43	+10~+43	+10~+43	+10~+43
Water outlet	Heat / Cool	°C	20~60/5~20	20~60/5~20	20~60/5~20	20~60/5~20	20~60/5~20
<b>Electrical information</b>	<b>WH-</b>	<b>ADC0912K6E5AN</b>	<b>ADC0912K6E5AN</b>	<b>ADC0912K9E8AN</b>	<b>ADC0912K9E8AN</b>	<b>ADC16K9E8AN</b>	
Electric backup heater		kW	6,00	6,00	9,00	9,00	9,00
Recommended fuse <sup>4)</sup>		A	30/30	30/30	20/20	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>4)</sup>		mm <sup>2</sup>	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

**Aquarea T-CAP All in One 260 L K Series. Single phase / Three phase · R32**

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / Built-in flow meter.

**Flexibility:** 260 L DHW tank / 599 x 602 footprint / Built-in magnetic water filter.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Kit	Single phase (power to indoor)					Three phase (power to indoor)						
		KIT-AXC09K6E53	KIT-AXC12K6E53	KIT-AXC09K9E83	KIT-AXC12K9E83	KIT-AXC16K9E83		KIT-AXC09K6E53	KIT-AXC12K6E53	KIT-AXC09K9E83	KIT-AXC12K9E83	KIT-AXC16K9E83
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38		9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72		9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10		9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07		9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39		9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71		9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64		8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60		8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>			<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	33/33	33/33	33/33	33/33	33/33	33/33	33/33
Dimension	H x W x D	mm	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602	2036 x 599 x 602
Net weight		kg	119	119	119	119	120	119	119	119	119	120
Water pipe connector		Inch	R 1½	R 1½	R 1½	R 1½	R 1½	R 1½	R 1½	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power	W	145	145	145	145	145	145	145	145	145	145
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9	25,8	34,4	25,8	34,4	45,9
Water volume		L	260	260	260	260	260	260	260	260	260	260
Maximum DHW temperature		°C	65	65	65	65	65	65	65	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			XL	XL	XL	XL	XL	XL	XL	XL	XL	XL
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A	A+/A+/A
DHW tank ERP average climate η / COPdHW	η <sub>wh</sub> % / COPdHW		123/3,08	123/3,08	123/3,08	123/3,08	98/2,45	123/3,08	123/3,08	123/3,08	123/3,08	98/2,45
DHW tank ERP warm climate η / COPdHW	η <sub>wh</sub> % / COPdHW		134/3,35	134/3,35	134/3,35	134/3,35	123/3,08	134/3,35	134/3,35	134/3,35	134/3,35	123/3,08
DHW tank ERP cold climate η / COPdHW	η <sub>wh</sub> % / COPdHW		94/2,35	94/2,35	94/2,35	94/2,35	80/2,00	94/2,35	94/2,35	94/2,35	94/2,35	80/2,00
<b>Outdoor unit</b>			<b>WH-UXZ09KE5</b>	<b>WH-UXZ12KE5</b>	<b>WH-UXZ09KE8</b>	<b>WH-UXZ12KE8</b>	<b>WH-UXZ16KE8</b>	<b>WH-UXZ09KE5</b>	<b>WH-UXZ12KE5</b>	<b>WH-UXZ09KE8</b>	<b>WH-UXZ12KE8</b>	<b>WH-UXZ16KE8</b>
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	65	65	65	65	65	65	65
Dimension / Net weight	H x W x D	mm / kg	1340 x 900 x 320/88	1340 x 900 x 320/88	1340 x 900 x 320/90	1340 x 900 x 320/90	1340 x 900 x 320/103	1340 x 900 x 320/88	1340 x 900 x 320/88	1340 x 900 x 320/90	1340 x 900 x 320/90	1340 x 900 x 320/103
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)
Pipe length range / Elevation difference (in / out)		m / m	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	10/30	10/30	10/30	10/30	10/30	10/30	10/30
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43
Water outlet <sup>4)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20
<b>Electrical information</b>			<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K6E53</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC0912K9E83</b>	<b>WH-ADC16K9E83</b>
Electric backup heater		kW	6,00	6,00	9,00	9,00	9,00	6,00	6,00	9,00	9,00	9,00
Recommended fuse <sup>5)</sup>		A	30/30	30/30	20/20	20/20	20/20	30/30	30/30	20/20	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

### Aquarea T-CAP All in One 260 L K Series. Single phase / Three phase with Electrical Anode · R32

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / Built-in flow meter.

**Flexibility:** 260 L DHW tank / 599 x 602 footprint / Built-in magnetic water filter / Installation in harsh water conditions.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Kit	Single phase (power to indoor)			Three phase (power to indoor)			
	KIT-AXC09K6E5AN3	KIT-AXC12K6E5AN3	KIT-AXC09K9E8AN3	KIT-AXC12K9E8AN3	KIT-AXC16K9E8AN3		
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP		9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP		9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP		9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP		9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP		9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP		9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER		8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER		8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)
	Energy class <sup>1)</sup>		A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)
	Energy class <sup>1)</sup>		A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>		A+++ to D	A++/A++	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>		<b>WH-</b>	<b>ADC0912K6E5AN3</b>	<b>ADC0912K6E5AN3</b>	<b>ADC0912K9E8AN3</b>	<b>ADC0912K9E8AN3</b>	<b>ADC16K9E8AN3</b>
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	33/33	33/33
Dimension	HxWxD	mm	2036x599x602	2036x599x602	2036x599x602	2036x599x602	2036x599x602
Net weight		kg	119	119	119	119	120
Water pipe connector		Inch	R 1½	R 1½	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed
	Input power	W	145	145	145	145	145
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9
Water volume		L	260	260	260	260	260
Maximum DHW temperature		°C	65	65	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			XL	XL	XL	XL	XL
DHW tank ERP efficiency average / warm / cold <sup>2)</sup>		A+ to F	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A	A+ / A+ / A
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> % / COPdHW	123/3,08	123/3,08	123/3,08	123/3,08	98/2,45
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> % / COPdHW	134/3,35	134/3,35	134/3,35	134/3,35	123/3,08
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> % / COPdHW	94/2,35	94/2,35	94/2,35	94/2,35	80/2,00
<b>Outdoor unit</b>		<b>WH-UXZ09KE5</b>	<b>WH-UXZ12KE5</b>	<b>WH-UXZ09KE8</b>	<b>WH-UXZ12KE8</b>	<b>WH-UXZ16KE8</b>	
Sound power <sup>3)</sup>	Heat	dB(A)	65	65	65	65	65
Dimension / Net weight	HxWxD	mm / kg	1340x900x320/88	1340x900x320/88	1340x900x320/90	1340x900x320/90	1340x900x320/103
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)
Pipe length range / Elevation difference (in / out)		m / m	3~30/20	3~30/20	3~30/20	3~30/20	3~30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	10/30	10/30
Operating range - outdoor ambient	Heat	°C	-28~+35	-28~+35	-28~+35	-28~+35	-28~+35
	Cool	°C	+10~+43	+10~+43	+10~+43	+10~+43	+10~+43
Water outlet <sup>4)</sup>	Heat / Cool	°C	20~60/5~20	20~60/5~20	20~60/5~20	20~60/5~20	20~60/5~20
<b>Electrical information</b>		<b>WH-</b>	<b>ADC0912K6E5AN3</b>	<b>ADC0912K6E5AN3</b>	<b>ADC0912K9E8AN3</b>	<b>ADC0912K9E8AN3</b>	<b>ADC16K9E8AN3</b>
Electric backup heater		kW	6,00	6,00	9,00	9,00	9,00
Recommended fuse <sup>5)</sup>		A	30/30	30/30	20/20	20/20	20/20
Recommended minimum cable size, supply 1 / 2 <sup>5)</sup>		mm <sup>2</sup>	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5

1) Scale from A+++ to D. 2) Scale from A+ to F. 3) Sound power level in accordance to EN 12102 under conditions of the EN14825. 4) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 5) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud

Accessories	
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

**Aquarea T-CAP Bi-bloc K Series. Single phase / Three phase · R32**

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Built-in magnetic water filter.

**Comfort:** Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C hot water even at -10 °C outside temperature.

**Control:** Optimised user interface and improved features (2 zone control, bivalent control).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



			Single phase (power to indoor)		Three phase (power to indoor)					
			KIT-WXC09K3E5	—	KIT-WXC09K3E8	—	—			
			KIT-WXC09K6E5	KIT-WXC12K6E5	—	—	—			
			—	—	KIT-WXC09K9E8	KIT-WXC12K9E8	KIT-WXC16K9E8			
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP		9,00/5,03	12,10/4,84	9,00/5,03	12,10/4,84	16,00/4,38			
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP		9,00/3,07	12,10/3,04	9,00/3,07	12,10/3,04	16,00/2,72			
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP		9,00/3,69	12,00/3,44	9,00/3,69	12,00/3,44	16,00/3,10			
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP		9,00/2,31	12,00/2,29	9,00/2,31	12,00/2,29	16,00/2,07			
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP		9,00/3,00	12,00/2,72	9,00/3,00	12,00/2,72	16,00/2,39			
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP		9,00/2,10	12,00/2,29	9,00/2,10	12,00/2,29	16,00/1,71			
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER		8,80/3,11	10,70/2,68	8,80/3,11	10,70/2,68	13,40/2,64			
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER		8,80/4,63	10,70/3,92	8,80/4,63	10,70/3,92	15,50/3,60			
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,96/3,57(195/140)	4,58/3,46(180/135)	4,46/3,31(176/129)			
	Energy class <sup>1)</sup>		A+++ to D	A+++/A++	A+++/A++	A+++/A++	A+++/A++			
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	6,47/4,34(256/171)	5,88/4,09(232/160)			
	Energy class <sup>1)</sup>		A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++			
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	4,31/3,26(169/127)	3,83/3,20(150/125)			
	Energy class <sup>1)</sup>		A+++ to D	A++/A++	A++/A++	A++/A++	A++/A++			
<b>Indoor unit 3 kW electric heater</b>			<b>WH-SXC09K3E5</b>	—	<b>WH-SXC09K3E8</b>	—	—			
<b>Indoor unit 6 kW electric heater</b>			<b>WH-SXC09K6E5</b>	<b>WH-SXC12K6E5</b>	—	—	—			
<b>Indoor unit 9 kW electric heater</b>			—	—	<b>WH-SXC09K9E8</b>	<b>WH-SXC12K9E8</b>	<b>WH-SXC16K9E8</b>			
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33	33/33	33/33			
Dimension	H x W x D	mm	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348	892 x 500 x 348			
Net weight 3 kW / 6 kW / 9 kW		kg	40/41/—	—/41/—	40/—/41	—/—/41	—/—/42			
Water pipe connector		Inch	R 1½	R 1½	R 1½	R 1½	R 1½			
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed	Variable speed	Variable speed			
	Input power	W	145	145	145	145	173			
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	25,8	34,4	45,9			
<b>Outdoor unit</b>			<b>WH-UXZ09K5</b>	<b>WH-UXZ12K5</b>	<b>WH-UXZ09K8</b>	<b>WH-UXZ12K8</b>	<b>WH-UXZ16K8</b>			
Sound power <sup>2)</sup>	Heat	dB(A)	65	65	65	65	65			
Dimension	H x W x D	mm	1340 x 900 x 320	1340 x 900 x 320	1340 x 900 x 320	1340 x 900 x 320	1340 x 900 x 320			
Net weight		kg	88	88	90	90	103			
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1,60/1,080	1,60/1,080	1,60/1,080	1,60/1,080	1,83/1,235			
Piping diameter	Liquid / Gas	Inch (mm)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)	1/4(6,35)/1/2(12,70)			
Pipe length range / Elevation difference (in / out)		m	3-30/20	3-30/20	3-30/20	3-30/20	3-30/20			
Pre-charged pipe length / Additional gas amount		m / g/m	10/30	10/30	10/30	10/30	10/30			
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35			
	Cool	°C	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43	+10 ~ +43			
Water outlet <sup>3)</sup>	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20			
<b>Electrical information</b>			<b>Heater</b>	<b>3 kW</b>	<b>6 kW</b>	<b>6 kW</b>	<b>3 kW</b>	<b>9 kW</b>	<b>9 kW</b>	<b>9 kW</b>
Electric backup heater		kW	3,00	6,00	6,00	3,00	9,00	9,00	9,00	
Recommended fuse <sup>4)</sup>		A	30/15 or 16	30/30	30/30	20/15 or 16	20/20	20/20	20/20	
Recommended minimum cable size, supply 1 / 2 <sup>4)</sup>		mm <sup>2</sup>	3x4,0/3x1,5	3x4,0/3x4,0	3x4,0/3x4,0	5x1,5/3x1,5	5x1,5/5x1,5	5x1,5/5x1,5	5x2,5/5x1,5	

1) Scale from A+++ to D. 2) Sound power level in accordance to EN 12102 under conditions of the EN14825. 3) Between outdoor ambient -10 °C and -15 °C, the water outlet temperature gradually decreases from 60 °C to 55 °C. 4) Check local regulations. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-RTW1</b>	Optional remote controller for 2 zone control. K and L Series
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>CZ-NV2</b>	3 way valve kit to fit inside the hydrokit. K and L Series

Accessories	
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS5P</b>	PCB for advanced functions
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIREDLESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.



## Aquarea T-CAP All in One H Series. Three phase. Super Quiet outdoor unit - R410A

**Energy efficiency:** A+++ in heating at 35 °C and A+ in DHW / "A" water pump with variable speed / Stainless steel DHW tank with U-Vacua™ insulation panel / Built-in flow meter.

**Flexibility:** Optional magnet for the water filter.

**Comfort:** Low noise level / Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C water outlet temperature.

**Control:** Additional functions with optional PCB (2 zone control, bivalent control, Smart Grid contact and more).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.

011-1W0510  
011-1W0511



Three phase (power to indoor)					
Kit			KIT-AQC09HE8	KIT-AQC12HE8	KIT-AQC16HE8
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	9,00/4,84	12,00/4,74	16,00/4,28
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	9,00/2,94	12,00/2,88	16,00/2,71
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	9,00/3,59	12,00/3,44	16,00/3,10
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	9,00/2,21	12,00/2,19	16,00/2,13
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	9,00/2,85	12,00/2,72	16,00/2,49
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	9,00/2,02	12,00/1,92	16,00/1,86
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	7,00/3,17	10,00/2,81	12,20/2,57
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	7,00/5,19	10,00/5,13	12,20/3,49
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,59/3,32(181/130)	4,32/3,32(170/130)	4,08/3,20(160/125)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A++	A++/A+	A+/A
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,95/4,02(235/158)	5,86/4,02(231/158)	5,86/4,05(231/159)
	Energy class <sup>1)</sup>	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,08/3,20(160/125)	4,08/3,20(160/125)	3,83/3,20(150/125)
	Energy class <sup>1)</sup>	A+++ to D	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>			<b>WH-ADC0916H9E8</b>	<b>WH-ADC0916H9E8</b>	<b>WH-ADC0916H9E8</b>
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	33/33
Dimension	HxWxD	mm	1800x598x717	1800x598x717	1800x598x717
Net weight		kg	126	126	126
Water pipe connector		Inch	R 1½	R 1½	R 1½
A class pump	Number of speeds		Variable speed	Variable speed	Variable speed
	Input power (Min/Max)	W	36/152	36/152	36/152
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	45,9
Electric backup heater		kW	9,00	9,00	9,00
Recommended fuse <sup>2)</sup>		A	16/16	16/16	16/16
Recommended minimum cable size, supply 1 / 2 <sup>2)</sup>		mm <sup>2</sup>	5x1,5/5x1,5	5x1,5/5x1,5	5x1,5/5x1,5
Water volume		L	185	185	185
Maximum DHW temperature		°C	65	65	65
Material inside tank			Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147			L	L	L
DHW tank ERP efficiency average / warm / cold <sup>3)</sup>		A+ to F	A/A/A	A/A/A	A/A/B
DHW tank ERP average climate η / COPdHW		η <sub>wh</sub> %/COPdHW	95/2,37	95/2,37	91/2,27
DHW tank ERP warm climate η / COPdHW		η <sub>wh</sub> %/COPdHW	110/2,75	110/2,75	107/2,67
DHW tank ERP cold climate η / COPdHW		η <sub>wh</sub> %/COPdHW	75/1,87	75/1,87	72/1,80
<b>Outdoor unit</b>			<b>WH-UQ09HE8</b>	<b>WH-UQ12HE8</b>	<b>WH-UQ16HE8</b>
Sound power <sup>4)</sup>	Heat	dB(A)	58	58	62
Dimension / Net weight	HxWxD	mm / kg	1410x1283x320/151	1410x1283x320/151	1410x1283x320/161
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	2,85/5,951	2,85/5,951	2,99/6,243
Piping diameter	Liquid / Gas	Inch (mm)	3/8(9,52)/5/8(15,88)	3/8(9,52)/5/8(15,88)	3/8(9,52)/5/8(15,88)
Pipe length range / Elevation difference (in / out)		m / m	3~30/20	3~30/20	3~30/20
Pre-charged pipe length / Additional gas amount		m / g/m	10/50	10/50	10/50
Operating range - outdoor ambient	Heat	°C	-28~+35	-28~+35	-28~+35
	Cool	°C	+16~+43	+16~+43	+16~+43
Water outlet	Heat / Cool	°C	20~60/5~20	20~60/5~20	20~60/5~20

1) Scale from A+++ to D. 2) Check local regulations. 3) Scale from A+ to F. 4) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. \* EER and COP calculation is based in accordance to EN 14511. \*\* This product is designed to comply with the European drinking water standard (EU) 2020/2184. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Accessories	
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C

Accessories	
<b>CZ-NS4P</b>	PCB for advanced functions
<b>PAW-A2W-MGTFILTER</b>	Magnet for the water filter
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.

## Aquarea T-CAP Bi-bloc H Series. Three phase. Super Quiet outdoor unit - S-QC · R410A

**Energy efficiency:** A+++ in heating at 35 °C / "A" water pump with variable speed / Built-in flow meter.

**Flexibility:** Optional magnet for the water filter.

**Comfort:** Low noise level / Constant capacity down to -20 °C / Operating range down to -28 °C / 60 °C water outlet temperature.

**Control:** Additional functions with optional PCB (2 zone control, bivalent control, Smart Grid contact and more).

**Connectivity:** Optional Aquarea Smart and Service Cloud and integration into BMS projects.



Kit		Three phase (power to indoor)			
Kit		KIT-WQC09H3E8	KIT-WQC12H9E8	KIT-WQC16H9E8	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	9,00/4,84	12,00/4,74	16,00/4,28	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	9,00/2,94	12,00/2,88	16,00/2,71	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	9,00/3,59	12,00/3,44	16,00/3,10	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	9,00/2,21	12,00/2,19	16,00/2,13	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	9,00/2,85	12,00/2,72	16,00/2,49	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	9,00/2,02	12,00/1,92	16,00/1,86	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	7,00/3,17	10,00/2,81	12,20/2,57	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	7,00/5,19	10,00/5,13	12,20/3,49	
Heating average climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,59/3,32(181/130)	4,32/3,32(170/130)	4,08/3,20(160/125)
	Energy class	A+++ to D	A+++/A++	A++/A++	A++/A++
Heating warm climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	5,95/4,02(235/158)	5,86/4,02(231/158)	5,86/4,05(231/159)
	Energy class	A+++ to D	A+++/A+++	A+++/A+++	A+++/A+++
Heating cold climate (W 35 °C / W 55 °C)	Seasonal energy efficiency	SCOP (η <sub>s</sub> %)	4,08/3,20(160/125)	4,08/3,20(160/125)	3,83/3,20(150/125)
	Energy class	A+++ to D	A++/A++	A++/A++	A++/A++
<b>Indoor unit</b>		<b>WH-SQC09H3E8</b>	<b>WH-SQC12H9E8</b>	<b>WH-SQC16H9E8</b>	
Sound pressure	Heat / Cool	dB(A)	33/33	33/33	
Dimension	H x W x D	mm	892 x 500 x 340	892 x 500 x 340	
Net weight		kg	43	45	
Water pipe connector		Inch	R 1¼	R 1¼	
A class pump	Number of speeds	Variable speed	Variable speed	Variable speed	
	Input power (Min/Max)	W	32/102	34/110	30/105
Heating water flow (ΔT=5 K, 35 °C)		L/min	25,8	34,4	45,9
Electric backup heater		kW	3,00	9,00	9,00
Recommended fuse <sup>1)</sup>		A	15/30	15/30	15/30
Recommended minimum cable size, supply 1 / 2 <sup>1)</sup>		mm <sup>2</sup>	5x1,5/3x1,5	5x1,5/5x1,5	5x1,5/5x1,5
<b>Outdoor unit</b>		<b>WH-UQ09HE8</b>	<b>WH-UQ12HE8</b>	<b>WH-UQ16HE8</b>	
Sound power <sup>2)</sup>	Heat	dB(A)	58	58	62
Dimension	H x W x D	mm	1410 x 1283 x 320	1410 x 1283 x 320	1410 x 1283 x 320
Net weight		kg	151	151	161
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	2,85/5,951	2,85/5,951	2,99/6,243
Piping diameter	Liquid / Gas	Inch (mm)	3/8(9,52)/5/8(15,88)	3/8(9,52)/5/8(15,88)	3/8(9,52)/5/8(15,88)
Pipe length range		m	3-30	3-30	3-30
Elevation difference (in / out)		m	20	20	20
Pre-charged pipe length		m	10	10	10
Additional gas amount		g/m	50	50	50
Operating range - outdoor ambient	Heat	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35
	Cool	°C	+16 ~ +43	+16 ~ +43	+16 ~ +43
Water outlet	Heat / Cool	°C	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20	20 ~ 60/5 ~ 20

1) Check local regulations. 2) Sound power in accordance to 811/2013, 813/2013 and EN 12102-1:2017 at +7 °C. \* EER and COP calculation is based in accordance to EN 14511.

Accessories	
<b>PAW-TD20C1E5-1</b>	Tank 200 L - Stainless steel
<b>PAW-TD30C1E5-1</b>	Tank 300 L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200 L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300 L - Enamelled
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>CZ-NV1</b>	3 way valve kit to fit inside the hydrokit. H and J Series
<b>PAW-BTANK50L-2</b>	Buffer tank 50 L

Accessories	
<b>CZ-TAW1C</b>	Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud
<b>CZ-TAW1-CBL</b>	10 m extension cable for CZ-TAW1C
<b>CZ-NS4P</b>	PCB for advanced functions
<b>PAW-A2W-MGTFILTER</b>	Magnet for the water filter
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat



INTERNET CONTROL: Optional.


# Aquarea Loop, the water loop heat pump for multi-family buildings

The Aquarea Loop is a decentralised water-to-air heat pump using R290, designed to provide heating and cooling for each apartment connected to a central water loop.




## Choice of pre-installed hydraulic options available.

2 and 3 way valves with modulation.



Injection kit.



If it is not possible to pipe away condensation, it is possible to reinject it into the system thanks to an optional kit which can be installed inside of the unit.

## Aquarea Loop - R290

- Compact indoor unit – depth of only 140 mm
- DC Inverter compressor with R290
- Cooling in summer
- Use of low centralised loop water temperature of 20 - 30 °C all year round
- Use of existing piping for renovations\*



\* Based on the low flow rate requirement – must be checked on each project.

### Technical features

Model (the complete model codes are shown in the table below)			P-CWSL10	P-CWSL20	P-CWSL30
Cooling capacity <sup>1)</sup>	Nominal (Min - Max)	kW	1,10 (0,20 - 1,20)	1,50 (0,30 - 1,70)	2,60 (0,60 - 3,00)
EER		W/W	4,40	4,80	4,80
SEER <sup>2)</sup>			<b>5,50</b>	<b>6,10</b>	<b>7,90</b>
Input power <sup>1)</sup>		kW	0,2	0,3	0,5
Heating capacity <sup>3)</sup>	Nominal (Min - Max)	kW	1,10 (0,40 - 1,40)	2,00 (0,40 - 2,30)	3,10 (0,80 - 3,60)
COP		W/W	5,20	5,40	5,90
SCOP <sup>2)</sup>			<b>6,44</b>	<b>6,92</b>	<b>6,74</b>
Input power <sup>3)</sup>		kW	0,2	0,4	0,5
<b>Ventilation</b>					
Ventilation speeds			4	4	4
Air flow	Min / Ave / Max	m <sup>3</sup> /h	50/105/160	100/205/330	175/305/500
<b>Electrical data</b>					
Power supply	Voltage	V	230	230	230
	Phase		Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50
Maximum input current		mA	1,74	3,87	5,01
Maximum consumption		kW	0,40	0,89	1,15
<b>Sound levels</b>					
Sound power <sup>4)</sup>	Max	dB(A)	48	50	52
Sound pressure <sup>5)</sup>	Min / Nom / Max	dB(A)	28/33/40	29/34/42	31/35/44
<b>Hydraulic data</b>					
Connection type			Eurokonus	Eurokonus	Eurokonus
Hydraulic connections		Inch	¾	¾	¾
Water flow rate	Heating	L/min	3,7	7,7	12,0
	Cooling	L/min	4,5	5,2	9,0
Nominal pressure drop	Heating	kPa	6,80	11,20	12,50
	Cooling	kPa	4,80	5,40	7,50
Nominal pressure drop with flow control valve	Heating	kPa	7,80	14,20	20,50
	Cooling	kPa	5,40	6,70	11,80
Refrigerant (R290)		kg	0,10	0,14	0,15
<b>Dimension and weight</b>					
Dimension	H x W x D	mm	641 x 775 x 144	641 x 975 x 144	641 x 1225 x 144
Empty weight		kg	35	40	45
<b>Operating range and water outlet</b>					
Operating range - indoor air	Heating	°C	5 - 27	5 - 27	5 - 27
	Cooling	°C	18 - 35	18 - 35	18 - 35
Water outlet	Heating	°C	10 - 45	10 - 45	10 - 45
	Cooling	°C	15 - 50	15 - 50	15 - 50

1) Loop water temperature 30 °C - Ambient air temperature 27 °C, indoor humidity 38% - Performance according to EN 14511. 2) SEER and SCOP in accordance with EN 14825. 3) Ring water temperature 20 °C - Ambient air temperature 20 °C, indoor humidity 50% - Performance according to EN 14511. 4) Sound power measured according to EN 14511. 5) Sound pressure at a distance of 1 m measured according to ISO 7779.

Aquarea Loop with on-board display					
Hydraulic configuration	Without valves		P-CWSL10SC5-HCE	P-CWSL20SC5-HCE	P-CWSL30SC5-HCE
	Without valves + injection kit		P-CWSL10SC5-HFE	P-CWSL20SC5-HFE	P-CWSL30SC5-HFE
	2 and 3 way valve with modulation		P-CWSL10SC5-HBE	P-CWSL20SC5-HBE	P-CWSL30SC5-HBE
	2 and 3 way valve with modulation + injection kit		P-CWSL10SC5-HEE	P-CWSL20SC5-HEE	P-CWSL30SC5-HEE
Aquarea Loop with on-board display with integrated Wi-Fi					
Hydraulic configuration	Without valves		P-CWSL10SC5-WCE	P-CWSL20SC5-WCE	P-CWSL30SC5-WCE
	Without valves + injection kit		P-CWSL10SC5-WFE	P-CWSL20SC5-WFE	P-CWSL30SC5-WFE
	2 and 3 way valve with modulation		P-CWSL10SC5-WBE	P-CWSL20SC5-WBE	P-CWSL30SC5-WBE
	2 and 3 way valve with modulation + injection kit		P-CWSL10SC5-WEE	P-CWSL20SC5-WEE	P-CWSL30SC5-WEE



# Aquarea Air Smart fan coils

Stylish, compact fan coil units for high comfort and energy savings.

+ MORE FAN COIL OPTIONS IN CHILLERS SECTION



## Remote control with Aquarea Home App.

\* Requires Wi-Fi control or Home Network Hub PCZ-ESW737.



Aquarea Home




## AC SELECT.

Smart and user-friendly the new air conditioning selection program: <https://acselect.panasonic.eu/>




Aquarea Air Smart fan coils have a minimal visual impact and can be elegantly integrated into any home or office environment, adapting to any type of furniture.


Designed to provide both heating and cooling in one compact unit, they maximise energy savings when combined with an Aquarea Heat Pumps.




Sophisticated and slim design, with an elegant metal body.



Self-modulated air flow control by the unit (PI logic) and brushless DC fan motor with Inverter.



Versatile with a range of installation options.



Wide range of control options, including on-board or wall-mounted controls.

### Self-modulated air-flow control by the unit.

The fan speed is no longer "stepped" but continuously modulated with proportional and integrative logic: this reduces both noise and annoying air movements.

#### Aquarea Air Smart fan coil floor standing.

Even narrower and thinner fan coils.




#### Aquarea Air Smart fan coil wall-mounted.

The thinnest and most quietest in its class.



#### Aquarea Air Smart fan coil ducted / ducted thin.

Variable speed, constant air flow.

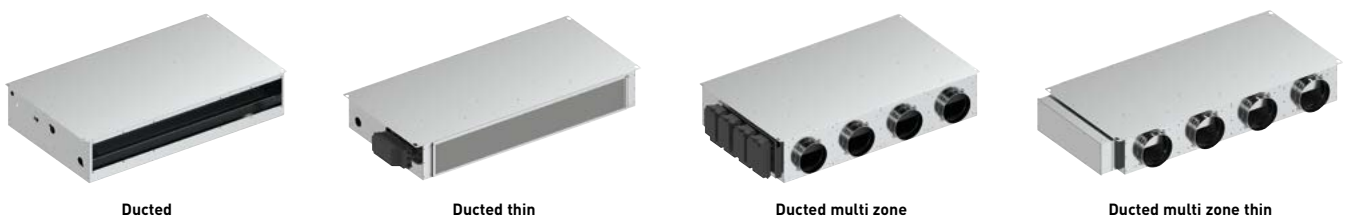

Ducted

Ducted thin

Ducted multi zone

Ducted multi zone thin

## Aquarea Air Smart fan coil floor standing

Slim chassis profile, only 119 mm / RAL 9003 / DC Inverter – maximising comfort and energy savings / Modulated air flow.  
**Possible configurations:** Left or right water connections / 2 or 3 way valves as accessories / On-board or wall mounted control or PCB for analog input (0-10 V)



Model (the complete model codes are shown in the table below)		P-FAL10	P-FAL20	P-FAL30	P-FAL35	P-FAL40
<b>Fan speed</b> <sup>1)</sup>		<b>Min / Med / Max</b>	<b>Min / Med / Max</b>	<b>Min / Med / Max</b>	<b>Min / Med / Max</b>	<b>Min / Med / Max</b>
Total cooling capacity <sup>2)</sup>	kW	0,43/0,73/0,91	0,75/1,36/2,12	1,15/2,08/2,81	1,32/2,39/3,30	1,36/2,57/3,71
Sensible capacity <sup>2)</sup>	kW	0,29/0,51/0,71	0,59/1,04/1,54	0,83/1,51/2,11	1,02/1,84/2,65	1,05/1,98/2,90
Water flow <sup>2)</sup>	l/h	73,67/125,07/155,91	128,50/233,01/363,22	197,03/356,36/481,43	226,15/409,48/565,39	—
Water pressure drop <sup>2)3)</sup>	kPa	5,7/10,2/12,1	1,9/4,3/8,2	2,7/9,9/17,1	2,5/8,8/18,0	—
Heating capacity <sup>4)</sup>	kW	0,37/0,69/1,00	0,82/1,50/2,19	1,19/2,15/2,99	1,45/2,56/3,73	1,47/2,78/4,23
Water flow <sup>4)</sup>	l/h	65,11/120,91/179,87	144,60/269,80/389,71	211,61/380,89/532,55	259,22/456,72/671,86	—
Water pressure drop <sup>3)4)</sup>	kPa	2,6/6,8/9,1	1,5/4,3/9,2	2,7/9,3/19,1	3,0/8,9/21,2	—
<b>Sound levels</b>						
Sound power	dB(A)	37/47/54	37/47/54	37/47/57	37/47/55	37/48/58
Sound pressure <sup>5)</sup>	dB(A)	24/33/41	25/34/42	26/34/44	26/35/46	28/38/47
<b>Ventilation</b>						
Number of fans		1	1	1	1	1
Air flow	m <sup>3</sup> /h	49/91/146	124/210/294	194/318/438	302/410/567	364/479/663
Maximum static pressure	Pa	10	10	13	13	13
<b>Electrical data</b>						
Power supply	V / Phase / Hz	V	230/1/50	230/1/50	230/1/50	230/1/50
Consumption	W	7,0/9,0/13,0	14,0/18,0/22,0	16,0/20,0/24,0	18,0/22,0/26,5	—
<b>Water connections</b>						
Hydraulic connections type		Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus
Hydraulic connections	Inch	¾	¾	¾	¾	¾
<b>Dimension and weight</b>						
Dimension / Weight	H x W x D	mm / kg	580 x 680 x 119/13	580 x 880 x 119/16	580 x 1080 x 119/18	580 x 1280 x 119/20
			580 x 1480 x 119/23			

1) Fan standard factory set speeds. 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) Pressure loss by corresponding nominal flow. 4) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C. 5) Informative data, considering an hypothetical sound attenuation of the room and installation of 9 dB(A).

### Option 1. Standard configurations with built-in accessories

#### Fan coil with on-board display

Left-hand piping, vertical installation, built-in 3 way valve

P-FAL10SC-HLE

P-FAL20SC-HLE

P-FAL30SC-HLE

P-FAL35SC-HLE

P-FAL40SC-HLE

#### Fan coil with wall-mounted control

Left-hand piping, vertical installation, built-in 3 way valve

P-FAL10SC-RLE

P-FAL20SC-RLE

P-FAL30SC-RLE

P-FAL35SC-RLE

P-FAL40SC-RLE

Control (required, to be ordered separately)	With Modbus	<b>PCZ-EEB749</b>
	With integrated Wi-Fi	<b>PCZ-EFB749</b>

#### Accessories and options

PCZ-LC0158 Feet for floor pipe cover

### Option 2. Configure your own Aquarea Air Smart fan coil floor standing unit

Left-hand piping	Right-hand piping
------------------	-------------------

<b>P-FAL10SC-00E</b>	<b>P-FAL10DC-00E</b>
----------------------	----------------------

<b>P-FAL20SC-00E</b>	<b>P-FAL20DC-00E</b>
----------------------	----------------------

<b>P-FAL30SC-00E</b>	<b>P-FAL30DC-00E</b>
----------------------	----------------------

<b>P-FAL35SC-00E</b>	<b>P-FAL35DC-00E</b>
----------------------	----------------------

<b>P-FAL40SC-00E</b>	<b>P-FAL40DC-00E</b>
----------------------	----------------------

<b>Control options (required)</b>	On-board display	With Modbus	<b>PCZ-ECA844</b>
		With integrated Wi-Fi	<b>PCZ-EWA844</b>
	Wall-mounted control	With Modbus	<b>PCZ-ESE845 + PCZ-EEB749</b>
		With integrated Wi-Fi	<b>PCZ-ESE845 + PCZ-EFB749</b>
	PCB for analog control (0-10 V)		<b>PCZ-B10842</b>

<b>Valve kits (optional)</b>	3 way valve with motor	<b>PCZ-V30720</b>
	2 way valve with motor	<b>PCZ-V20139</b>

<b>Condensate drip tray for horizontal installation (optional)</b>	For P-FAL10	<b>PCZ-GB0520</b>
	For P-FAL20	<b>PCZ-GB0521</b>
	For P-FAL30	<b>PCZ-GB0522</b>
	For P-FAL40	<b>PCZ-GB0523</b>
	For P-FAL50	<b>PCZ-GB0524</b>

#### Accessories and options

PCZ-LC0606 Feet for anchoring the unit to the floor

### Control options.

On-board display with Modbus or integrated Wi-Fi.




Wall-mounted control with Modbus or integrated Wi-Fi.

PCZ-EEB749 /  
PCZ-EFB749



PCB for analog control (0-10 V).


PCZ-B10842



### Aquarea Air Smart fan coil wall-mounted

Slim chassis profile, only 128 mm / RAL 9003 / DC Inverter – maximising comfort and energy savings / Modulated air flow.

**Possible configurations:** Left or right water connections / 2 or 3 way valves as accessories / On-board or wall mounted control or PCB for analog input (0-10 V)

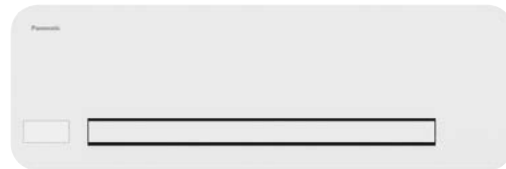

Model [the complete model codes are shown in the table below]			P-FMM10	P-FMM15	P-FMM20	P-FMM40
Fan speed <sup>1)</sup>			Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max
Total cooling capacity <sup>2)</sup>	kW		0,49/0,88/1,24	0,62/1,08/1,61	0,70/1,21/1,94	1,32/2,66/3,94
Sensible capacity <sup>2)</sup>	kW		0,37/0,70/0,98	0,52/0,86/1,27	0,57/1,02/1,52	1,08/2,05/2,92
Water flow <sup>2)</sup>	l/h		84,00/150,80/212,40	106,20/185,00/275,80	119,90/207,30/332,40	226,40/455,30/674,30
Water pressure drop <sup>2)</sup>	kPa		4,8/10,5/11,7	4,7/5,6/5,1	5,5/5,4/5,3	1,8/6,0/12,1
Heating capacity <sup>3)</sup>	kW		0,54/0,98/1,45	0,76/1,30/1,93	0,78/1,49/2,28	1,63/3,04/4,44
Water flow <sup>3)</sup>	l/h		97,00/176,30/264,50	139,30/239,80/354,40	141,10/273,30/414,40	296,40/547,00/800,90
Water pressure drop <sup>3)</sup>	kPa		5,1/12,0/16,3	4,8/6,3/7,2	6,0/6,4/8,1	2,3/6,9/14,1
<b>Sound levels</b>						
Sound power	dB(A)		35/46/53	36/47/54	37/48/58	38/48/62
Sound pressure <sup>4)</sup>	dB(A)		25/33/40	25/34/41	26/34/42	27/37/51
<b>Ventilation</b>						
Air flow	m <sup>3</sup> /h		84/155/228	124/229/331	138/283/440	230/480/788
<b>Electrical data</b>						
Power supply	V / Phase / Hz	V	230/1/50	230/1/50	230/1/50	230/1/50
Consumption		W	5/8/19	5/9/20	5/11/29	8/23/30
<b>Water connections</b>						
Hydraulic connections type			Eurokonus	Eurokonus	Eurokonus	Eurokonus
Hydraulic connections	Inch		¾	¾	¾	¾
<b>Dimension and weight</b>						
Dimension / Weight	HxWxD	mm / kg	335x815x128/14	335x1015x128/16	335x1215x128/19	335x1215x215/24

1) Fan standard factory set speeds. 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C. 4) Informative data, considering an hypothetical sound attenuation of the room and installation of 9 dB(A).

#### Option 1. Standard configurations with built-in accessories

##### Fan coil with on-board display and wireless IR control

Right-hand piping, built-in 3 way valve

P-FMM10DC-QNE

P-FMM15DC-QNE

P-FMM20DC-QNE

P-FMM40DC-QNE

##### Fan coil with wall-mounted control

Right-hand piping, built-in 3 way valve

P-FMM10DC-RNE

P-FMM15DC-RNE

P-FMM20DC-RNE

P-FMM40DC-RNE

Control (required, to be ordered separately)	With Modbus	<b>PCZ-EEB749</b>
	With integrated Wi-Fi	<b>PCZ-EFB749</b>

#### Option 2. Configure your own Aquarea Air Smart fan coil wall-mounted unit

##### Fan coil with on-board display and wireless IR control

Left-hand piping

P-FMM10SC-Q0E

P-FMM15SC-Q0E

P-FMM20SC-Q0E

—

Right-hand piping

P-FMM10DC-Q0E

P-FMM15DC-Q0E

P-FMM20DC-Q0E

P-FMM40DC-Q0E

##### Fan coil with wall-mounted control

Left-hand piping

P-FMM10SC-R0E

P-FMM15SC-R0E

P-FMM20SC-R0E

—

Right-hand piping

P-FMM10DC-R0E

P-FMM15DC-R0E

P-FMM20DC-R0E

P-FMM40DC-R0E

Control (required, to be ordered separately)	With Modbus	<b>PCZ-EEB749</b>
	With integrated Wi-Fi	<b>PCZ-EFB749</b>

##### Fan coil with PCB for analog control (0-10 V)

Left-hand piping

P-FMM10SC-V0E

P-FMM15SC-V0E

P-FMM20SC-V0E

—

Right-hand piping

P-FMM10DC-V0E

P-FMM15DC-V0E

P-FMM20DC-V0E

P-FMM40DC-V0E

##### Valve kits (optional)

**PCZ-V30688** 3 way valve with motor for models 10, 15, 20

**PCZ-V30718** 3 way valve with motor for model 40

**PCZ-V20687** 2 way valve with motor for models 10, 15, 20

**PCZ-V20139** 2 way valve with motor for model 40

#### Control options.

**On-board display with Modbus or integrated Wi-Fi.**




**Wall-mounted control with Modbus or integrated Wi-Fi.**

PCZ-EEB749 / PCZ-EFB749



**PCB for analog control (0-10 V).**





**Aquarea Air Smart fan coil ducted thin / ducted****Fan coil ducted units with cooling and heating.****Cooling capacity: 0,7 to 5,3 kW.****Heating capacity: 0,7 to 5,8 kW.**

Optional controller.  
Wall-mounted control  
with Modbus.  
PCZ-EEB749



Optional controller.  
Wall-mounted control  
with integrated Wi-Fi.  
PCZ-EFB749



Optional controller.  
PCB for analog control  
(0-10 V).

+ CHECK PAGE 128 FOR A WIDER SELECTION OF ACCESSORIES

**The range at a glance**

- Slim profile, only 185 mm for the thin version
- DC Inverter – maximising comfort and energy savings
- Modulated air flow
- Quiet operation
- Centrifugal fan with single motor impeller
- Vertical or horizontal installation



**Possible configurations**

- Left or right water connections
- 2 or 3 way valves as accessories
- Wall-mounted control or PCB for analog input (0-10 V)

**High efficiency ducted fan coil for high comfort and quiet operation thanks to self modulating airflow control.**

**Ducted thin, designed to fit any space**

With a height of only 185 mm, the thin version is even more versatile than the classic version and fits perfectly into any wall or false ceiling with either horizontal or vertical installation.

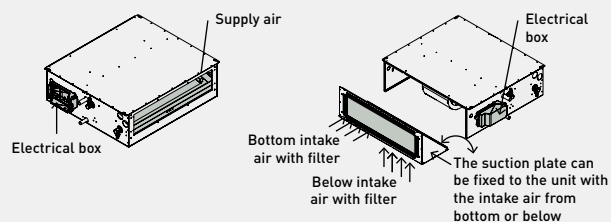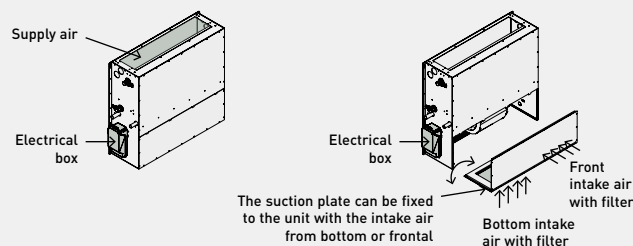**Ducted thin****High installation flexibility.****Horizontal installation.****Vertical installation.**

Technical features

		Ducted thin					Ducted					
Model (the complete model codes are shown in the table below)		P-FTN15	P-FTN20	P-FTN25	P-FTN35	P-FTN45	P-FSN20	P-FSN25	P-FSN35	P-FSN45	P-FSN55	
Fan speed <sup>1)</sup>		Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	
Total cooling capacity <sup>2)</sup>	kW	0,66/1,14 /1,40	1,01/1,84 /2,10	1,23/2,17 /2,60	1,47/2,40 /3,30	1,72/2,80 /4,45	0,82/1,37 /1,88	1,27/1,86 /2,14	1,53/2,38 /2,97	1,81/3,22 /3,48	1,82/3,97 /5,31	
Sensible capacity <sup>2)</sup>	kW	0,46/0,84 /1,05	0,70/1,27 /1,50	0,88/1,56 /2,10	1,06/1,77 /2,45	1,23/2,33 /3,20	0,61/0,96 /1,48	0,93/1,43 /1,56	1,17/1,98 /2,92	1,33/2,58 /2,95	1,33/2,75 /3,65	
Water flow <sup>2)</sup>	l/h	113/195 /270	173/315 /405	211/373 /510	251/412 /610	295/481 /805	141/235 /322	218/319 /367	262/408 /509	310/552 /596	312/680 /910	
Water pressure drop <sup>2)3)</sup>	kPa	1,0/3,0 /5,0	2,0/5,0 /8,0	4,0/10,0 /17,0	2,0/5,0 /11,0	2,0/6,0 /14,0	9,2/11,8 /15,7	9,9/14,9 /19,4	2,4/2,8 /2,9	9,0/12,6 /14,6	4,1/16,1 /27,2	
Heating capacity <sup>4)</sup>	kW	0,68/1,32 /1,65	1,01/1,80 /2,10	1,32/2,32 /2,86	1,63/2,76 /3,71	1,89/3,98 /5,20	0,9/1,48 /1,98	1,36/2,04 /2,54	1,81/2,63 /3,45	1,96/3,77 /4,46	1,95/4,23 /5,73	
Water flow <sup>4)</sup>	l/h	115/222 /310	170/303 /440	235/410 /540	288/486 /730	329/692 /880	159/261 /349	239/360 /448	319/464 /608	346/665 /787	347/754 /1025	
Water pressure drop <sup>3)4)</sup>	kPa	1,0/3,0 /6,0	2,0/5,0 /9,0	4,0/11,0 /18,0	2,0/6,0 /13,0	3,0/10,0 /15,0	51/12,0 /16,3	10,3/15,6 /21,5	2,6/2,8 /2,9	9,2/15,6 /18,4	4,0/16,4 /29,3	
<b>Sound levels</b>												
Sound power	dB(A)	42/47/53	44/51/58	45/52/58	46/54/60	47/54/61	46/54/58	46/54/58	46/54/57	47/55/58	48/55/60	
<b>Ventilation</b>												
Number of fans		1	1	2	2	3	1	1	2	2	3	
Air flow	m <sup>3</sup> /h	90/200/290	140/290/390	190/390/550	230/450/680	250/610/870	120/260/390	180/350/560	240/440/730	260/550/905	280/750/1150	
Maximum static pressure	Pa	100	90	120	110	140	90	130	110	140	140	
<b>Electrical data</b>												
Power supply	Voltage	V	230	230	230	230	230	230	230	230	230	
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	
	Frequency	Hz	50	50	50	50	50	50	50	50	50	
Consumption	W	14/32/80	22/55/140	26/65/160	33/80/160	38/115/230	6/11/24	7/14/31	8/16/34	13/30/38	14/42/85	
Degree of protection	IP	X0	X0	X0	X0	X0	X0	X0	X0	X0	X0	
<b>Connections</b>												
Hydraulic connections type		Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	
Hydraulic connections	Inch	¾	¾	¾	¾	¾	¾	¾	¾	¾	¾	
Condensate drainage connection	mm	20	20	20	20	20	20	20	20	20	20	
Intake air connection (base x height)	mm	460 x 100	660 x 100	860 x 100	1060 x 100	1320 x 100	460 x 150	660 x 150	860 x 150	1060 x 150	1320 x 150	
Return air connection (base x height)	mm	510 x 100	710 x 100	910 x 100	1110 x 100	1370 x 100	510 x 150	710 x 150	910 x 150	1110 x 150	1370 x 150	
<b>Dimension and weight</b>												
Dimension	H x W x D	mm	185 x 590 x 575	185 x 790 x 575	185 x 990 x 575	185 x 1190 x 575	185 x 1440 x 575	240 x 590 x 695	240 x 790 x 695	240 x 990 x 695	240 x 1190 x 695	240 x 1440 x 695
Weight	kg	30	41	45	54	65	32	43	47	56	67	

1) Fan standard factory set speeds. 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) Pressure loss by corresponding nominal flow. 4) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C.

Configure your own Aquarea Air Smart fan coil ducted thin / ducted unit

Fan coil with wall-mounted control		
Left-hand piping	Right-hand piping	
P-FTN15005-RE	P-FTN15R05-RE	
P-FTN20005-RE	P-FTN20R05-RE	
P-FTN25005-RE	P-FTN25R05-RE	
P-FTN35005-RE	P-FTN35R05-RE	
P-FTN45005-RE	P-FTN45R05-RE	
P-FSN20005-RE	P-FSN20R05-RE	
P-FSN25005-RE	P-FSN25R05-RE	
P-FSN35005-RE	P-FSN35R05-RE	
P-FSN45005-RE	P-FSN45R05-RE	
P-FSN55005-RE	P-FSN55R05-RE	
Control (required, to be ordered separately)	With Modbus	PCZ-EEB749
	With integrated Wi-Fi	PCZ-EFB749

Fan coil with PCB for analog control (0-10 V)		
Left-hand piping	Right-hand piping	
P-FTN15005-JE	P-FTN15R05-JE	
P-FTN20005-JE	P-FTN20R05-JE	
P-FTN25005-JE	P-FTN25R05-JE	
P-FTN35005-JE	P-FTN35R05-JE	
P-FTN45005-JE	P-FTN45R05-JE	
P-FSN20005-JE	P-FSN20R05-JE	
P-FSN25005-JE	P-FSN25R05-JE	
P-FSN35005-JE	P-FSN35R05-JE	
P-FSN45005-JE	P-FSN45R05-JE	
P-FSN55005-JE	P-FSN55R05-JE	

Valve kits (optional)	
PCZ-V30361	3 way valve with motor
PCZ-V20139	2 way valve with motor

## Aquarea Air Smart fan coil ducted multi zone thin / ducted multi zone

Fan coil ducted units with cooling and heating.

Cooling capacity: 0,5 to 7,6 kW.

Heating capacity: 0,5 to 8,52 kW.



Optional controller.  
Wall-mounted control  
with Modbus.  
PCZ-EEB749



Optional controller.  
Wall-mounted control  
with integrated Wi-Fi.  
PCZ-EFB749



Optional controller.  
PCB for analog control  
(0-10 V).

+ CHECK PAGE 132 FOR A WIDER SELECTION OF ACCESSORIES

### The range at a glance

- Multi zone management (2-5 zones)
- Slim profile, only 185 mm for the thin version
- DC Inverter – maximising comfort and energy savings
- Modulated air flow
- Quiet operation
- Centrifugal fan with single motor impeller

### Possible configurations

- Left or right water connections
- 2 or 3 way valves as accessories
- Wall-mounted control or PCB for analog input (0-10 V)

### The ducted Smart fan coil unit with integrated multi zone management.

#### High installation flexibility.

##### Single air outlet per zone.



Example:  
3 air outlets for 3 independent zones.

##### Multiple air outlets per zone.



Example:  
3 air outlets for 2 independent zones.  
Zone 1 with dual channel.  
Zone 2 with single channel.

### Multi zone management

Thanks to integrated multi zone management and the use of forward-bladed centrifugal brushless EC multi-fans, the fan coil ducted multi zone allow independent management of the different thermal zones, resulting in benefits in terms of efficiency, comfort and quietness.



#### 1 | Air supply plate.

Built-in air supply plate, number of outlets depending on unit size.


- P-FTQ30/P-FSQ30: 2 outlets DN 160 mm
- P-FTQ45/P-FSQ45: 3 outlets DN 160 mm
- P-FTQ60/P-FSQ60: 4 outlets DN 160 mm
- P-FTQ65/P-FSQ75: 5 outlets DN 160 mm

#### 2 | Fans.

Integrated multi-fans for independent management of the different zones.

#### 3 | Horizontal condensate tray.

Allows the collection of condensate if the unit is installed horizontally.

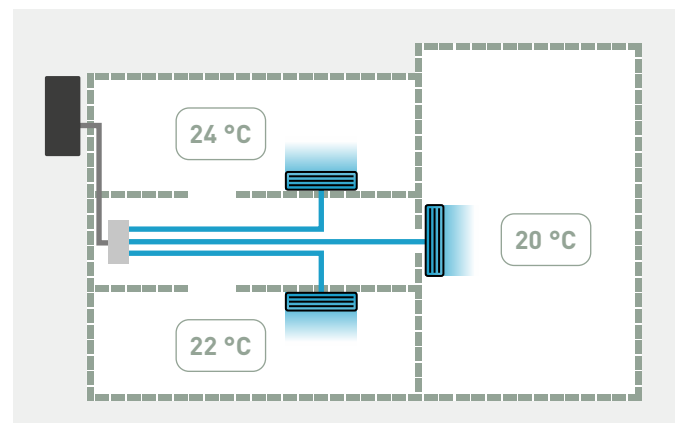

## Technical features

		Ducted multi zone thin				Ducted multi zone				
Model		P-FTQ30	P-FTQ45	P-FTQ60	P-FTQ65	P-FSQ30	P-FSQ45	P-FSQ60	P-FSQ75	
<small>(the complete model codes are shown in the table below)</small>										
Fan speed <sup>1)</sup>		Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	
Total cooling capacity <sup>2)</sup>	kW	1,10/1,97 /3,02	1,16/2,97 /4,40	2,02/3,68 /5,70	2,09/4,15 /6,40	0,47/3,80 /3,23	0,66/3,77 /4,57	0,85/4,87 /5,88	1,06/6,31 /7,61	
Sensible capacity <sup>2)</sup>	kW	0,76 /1,37 /2,15	0,79/2,09 /3,16	1,45/2,67 /4,10	1,61/3,08 /4,60	0,33/2,70 /2,22	0,48/2,62 /3,16	0,63/3,40 /4,10	0,78/4,32 /5,20	
Single zone cooling capacity <sup>2)</sup>	kW	0,49/1,30 /1,70	0,49/1,30 /1,70	0,49/1,30 /1,70	0,49/1,30 /1,70	-/-/2,10	-/-/2,10	-/-/2,10	-/-/2,10	
Single zone sensible capacity <sup>2)</sup>	kW	0,31/0,89 /1,23	0,31/0,89 /1,23	0,31/0,89 /1,23	0,31/0,89 /1,23	-/-/1,50	-/-/1,50	-/-/1,50	-/-/1,50	
Water flow <sup>2)</sup>	l/h	190/338 /530	200/510 /800	346/630 /1030	358/713 /1220	80/651 /553	113/647 /782	146/834 /1008	182,3/1081 /1304	
Water pressure drop <sup>2)3)</sup>	kPa	4,0/11,0/22,0	2,0/9,0/18,0	3,0/9,0/18,0	1,0/4,0/9,0	1,8/29,0/54,1	1,2/25,7/36,4	1,0/20,2/28,5	1,6/37,3/52,6	
Heating capacity <sup>4)</sup>	kW	1,15/2,11 /3,30	1,71/3,19 /4,90	-/5,76/6,30	2,67/4,75 /7,65	0,45/3,90 /3,61	0,68/4,16 /5,08	0,90/5,42 /6,59	1,13/6,87 /8,37	
Single zone heating capacity <sup>4)</sup>	kW	0,42/1,29 /1,85	0,42/1,29 /1,85	0,42/1,29 /1,85	0,42/1,29 /1,85	-/-/2,20	-/-/2,20	-/-/2,20	-/-/2,20	
Water flow <sup>4)</sup>	l/h	200/368 /560	296/554 /800	391/699 /1110	464/826 /1305	80/688 /636	120/748 /914	159/975 /1189	199/1230 /1502	
Water pressure drop <sup>3)4)</sup>	kPa	4,0/13,0/25,0	3,0/10,0/19,0	3,0/10,0/18,0	2,0/5,0/10,0	1,4/29,0/61,2	1,1/28,9/42,3	0,9/23,1/33,7	1,5/41,4/60,6	
<b>Sound levels</b>										
Sound power	dB(A)	40/49/58	42/50/59	42/52/61	43/53/62	-/-/60	-/-/61	-/-/62	-/-/64	
<b>Ventilation</b>										
Number of fans		2	3	4	5	2	3	4	5	
Air flow	m <sup>3</sup> /h	145/290 /480	215/435 /720	288/576 /960	360/720 /1200	60/600 /810	90/900 /1215	120/1200 /1620	150/1500 /2025	
Single zone air flow	m <sup>3</sup> /h	50/160/240	50/160/240	50/160/240	50/160/240	60/205/300	60/205/300	60/205/300	60/205/300	
Maximum static pressure	Pa	100	100	100	100	100	100	100	100	
<b>Electrical data</b>										
Power supply	Voltage	V	230	230	230	230	230	230	230	
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	
	Frequency	Hz	50	50	50	50	50	50	50	
Consumption	W	31/66/130	45/102/195	61/135/260	76/162/325	53/140/178	159/420/534	212/560/712	265/700/890	
Degree of protection	IP	X0	X0	X0	X0	X0	X0	X0	X0	
<b>Connections</b>										
Hydraulic connections type		Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	
Hydraulic connections	Inch	¾	¾	¾	¾	¾	¾	¾	¾	
Condensate drainage connection	mm	20	20	20	20	20	20	20	20	
Intake air connection (base x height)	mm	160	160	160	160	160	160	160	160	
Return air connection (base x height)	mm	630 x 100	830 x 100	1030 x 100	1320 x 100	630 x 150	830 x 150	1030 x 150	1320 x 150	
<b>Dimension and weight</b>										
Dimension	H x W x D	mm	185 x 790 x 575	185 x 990 x 575	185 x 1190 x 575	185 x 1440 x 575	240 x 790 x 695	240 x 990 x 695	240 x 1190 x 695	240 x 1440 x 695
Weight	kg	41	45	54	56	43	47	56	67	

1) Fan standard factory set speeds. 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) Pressure loss by corresponding nominal flow. 4) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C.

## Configure your own Aquarea Air Smart fan coil ducted multi zone thin / ducted multi zone unit

Fan coil with wall-mounted control			Fan coil with PCB for analog control (0-10 V)		
Left-hand piping	Right-hand piping		Left-hand piping	Right-hand piping	
P-FTQ30005-RE	P-FTQ30R05-RE		P-FTQ30005-JE	P-FTQ30R05-JE	
P-FTQ45005-RE	P-FTQ45R05-RE		P-FTQ45005-JE	P-FTQ45R05-JE	
P-FTQ60005-RE	P-FTQ60R05-RE		P-FTQ60005-JE	P-FTQ60R05-JE	
P-FTQ65005-RE	P-FTQ65R05-RE		P-FTQ65005-JE	P-FTQ65R05-JE	
P-FSQ30005-RE	P-FSQ30R05-RE		P-FSQ30005-JE	P-FSQ30R05-JE	
P-FSQ45005-RE	P-FSQ45R05-RE		P-FSQ45005-JE	P-FSQ45R05-JE	
P-FSQ60005-RE	P-FSQ60R05-RE		P-FSQ60005-JE	P-FSQ60R05-JE	
P-FSQ75005-RE	P-FSQ75R05-RE		P-FSQ75005-JE	P-FSQ75R05-JE	
Control (required, to be ordered separately)	With Modbus	PCZ-EEB749			
	With integrated Wi-Fi	PCZ-EFB749			
<b>Valve kits (optional)</b>					
PCZ-V30361	3 way valve with motor				
PCZ-V20139	2 way valve with motor				

Fan coil comfort AC fan

Fan coil floor and ceiling units with cooling and heating.

Cooling capacity: 0,6 to 6,9 kW.

Heating capacity: 0,6 to 7,4 kW.



Optional controller.  
WRC remote control.



Optional controller.  
SRC - mini BMS controller.



Optional controller.  
Electronic controller  
TControl POD glass.



Optional controller.  
Electronic controller  
TControl EASY 3S.



Optional controller.  
Wired remote controller with touch control.  
PAW-FC-907AC




Optional controller.  
Wired remote controller.  
PAW-FC-903AC




Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1

Operating limits

Entering water temperature (without glycol).

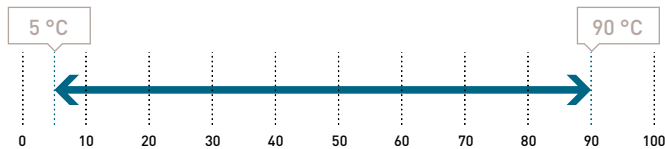

Indoor air temperature.

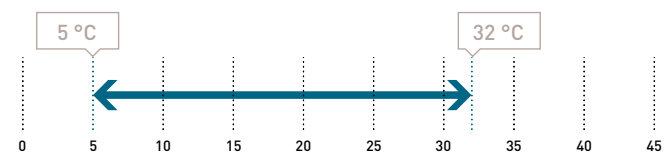

The range at a glance

- Versions: 2-pipes, 2-pipes + electric heater and 4-pipes
- 7 sizes
- 5-speed AC fan - standard factory set speeds: S1,S3,S5
- Air flow from 94 to 1064 m<sup>3</sup>/h
- Configuration: universal installation units (vertical or horizontal) with or without cabinet
- Left or right water connections
- Many air inlet/outlet configurations
- G2 air filter (G3 as an option)

Advantages

- Silent units
- New casing design for an increased robustness
- Harmonious and aesthetic RAL 9003 painted cabinet
- Valves, condensate drain pan and drain pump factory mounted
- 100% factory tested

Accessories and options

- 2 way or 3 way valves
- 4-pipes kit (additional coil)
- Circuit breakers
- Drain pump
- Electric heaters (from 500 W to 2500 W)
- Feet with/without grid
- Fuse holders
- G3 filter
- Horizontal or vertical drain guard (with valve)
- Many air inlet/outlet configurations
- Mechanical sensor for automatic change over
- Modbus communication board for Plogic
- MRC/WRC/BRC: remote controls for Plogic
- Other speeds configuration (standard factory set speeds: S1,S3,S5)
- SRC - mini BMS controller
- Suspension kit
- Plogic controller (other electromechanical or electronic control systems also available)
- TControl EASY 3S and TControl POD glass controllers (other electromechanical or electronic control systems also available)

+ SEE PAGE 582 FOR MORE DETAILS ABOUT FAN COIL CONTROLLERS

AC SELECT.

Smart and user-friendly the new air conditioning selection program: <https://acselect.panasonic.eu/>





## Technical features

Fan coil comfort AC fan			P-FC10	P-FC20	P-FC30	P-FC40	P-FC50	P-FC60	P-FC70
			S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>	S1/S3/S5 <sup>1)</sup>
<b>2-pipes</b>									
Total cooling capacity <sup>2)</sup>		kW	0,66/1,00/1,45	0,61/0,96/1,38	0,95/1,88/2,37	1,14/2,28/3,02	1,71/3,16/4,64	2,57/4,33/5,53	3,24/5,84/6,91
Sensible capacity <sup>2)</sup>		kW	0,48/0,77/1,05	0,43/0,70/1,02	0,78/1,44/1,80	0,83/1,66/2,23	1,24/2,23/3,27	1,81/3,14/4,25	2,26/4,11/4,85
Water flow <sup>2)</sup>		l/h	114/172/250	105/165/238	164/324/408	196/393/520	295/544/799	443/746/953	558/1006/1190
Water pressure drop <sup>2) 3)</sup>		kPa	9,17/19,5/39,1	2,65/4,62/7,43	5,8/17,6/26,3	5,0/15,6/25,6	7,5/22,8/47,1	12,6/33,9/54,4	4,4/13,9/19,4
Heating capacity <sup>4)</sup>		kW	0,63/1,18/1,71	0,63/1,03/1,53	1,00/1,86/2,49	1,14/2,28/3,18	1,79/3,47/4,81	2,45/4,22/5,63	3,45/6,27/7,41
Water flow <sup>4)</sup>		l/h	109/203/295	109/177/264	172/320/429	196/393/548	308/598/829	422/727/970	594/1080/1276
Water pressure drop <sup>2) 4)</sup>		kPa	5,9/17,3/33,8	2,76/5,06/8,54	5,8/16,2/27,0	5,0/15,6/28,1	6,1/20,7/38,5	18,6/52,4/91,4	4,9/16,0/22,3
<b>4-pipes</b>									
Total cooling capacity <sup>2)</sup>		kW	0,63/0,88/1,24	0,87/1,34/1,73	0,91/1,80/2,28	0,98/2,14/2,85	1,57/2,88/4,13	2,60/4,39/5,61	3,17/5,62/6,58
Sensible capacity <sup>2)</sup>		kW	0,46/0,67/0,91	0,65/1,02/1,36	0,75/1,39/1,74	0,71/1,57/2,10	1,14/2,04/2,92	1,82/3,18/4,28	2,21/3,96/4,62
Water flow <sup>2)</sup>		l/h	109/152/214	150/231/298	157/310/393	169/369/491	270/496/711	448/756/966	546/968/1133
Water pressure drop <sup>2) 3)</sup>		kPa	7,6/13,9/26,3	2,33/4,44/6,64	2,8/8,6/13,1	5,8/20,5/33,6	3,9/11,6/22,8	10,2/27,7/44,5	5,3/16,2/22,1
Heating capacity <sup>5)</sup>		kW	0,63/1,00/1,41	1,00/1,40/1,68	1,28/1,81/2,13	1,22/2,21/2,85	2,01/3,19/4,08	2,71/4,24/5,33	3,65/5,00/5,90
Water flow <sup>5)</sup>		l/h	54/86/121	86,1/121/145	110/156/183	105/190/245	173/275/351	233/365/459	314/431/508
Water pressure drop <sup>2) 5)</sup>		kPa	1,2/2,1/3,3	1,15/2,2/3,12	2,8/4,7/6,1	5,1/13,9/21,8	5,7/12,5/19,4	11,6/24,8/37	35,4/60,7/81,2
<b>Sound levels</b>									
Sound power	2-pipes	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/43/56	38/51/58	43/56/61
	4-pipes	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/46/56	38/51/58	43/56/61
Sound pressure <sup>6)</sup>	2-pipes	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52
	4-pipes	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52
NR <sup>6)</sup>	2-pipes		19/26/35	17/29/36	16/31/38	16/30/37	20/32/42	24/37/44	29/42/47
	4-pipes		19/26/35	17/29/36	16/31/38	16/30/37	20/32/42	24/37/44	29/42/47
<b>Ventilation</b>									
Number of fans			1	1	1	2	2	2	2
Air flow	2-pipes	m <sup>3</sup> /h	94/190/283	68/104/196	138/274/390	173/357/499	253/486/716	350/640/933	480/893/1064
	4-pipes	m <sup>3</sup> /h	95/168/253	89/161/241	132/263/369	148/335/467	242/466/671	334/614/885	470/859/1012
Filter			G2	G2	G2	G2	G2	G2	G2
<b>Electrical data</b>									
Power supply	Voltage	V	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Consumption	2-pipes	W	13/24/36	13/18/31	16/37/45	15/37/56	28/55/72	37/75/105	53/100/147
	4-pipes	W	13/24/36	11/18/28	16/37/44	15/37/55	28/54/70	37/74/104	53/99/145
Electric heater		W	500	500	500/1000	1250	1250/2500	1250/2500	1250/2500
<b>Water connections</b>									
Connection type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2 or 4-pipes	Cooling	Inch	½	½	½	½	½	½	¾
4-pipes	Heating	Inch	½	½	½	½	½	½	½
<b>Dimension</b>									
With cabinet - without feet	H x W x D	mm	477 x 766 x 225	477 x 766 x 225	477 x 951 x 225	477 x 1136 x 225	477 x 1321 x 225	477 x 1506 x 225	575 x 1319 x 225
Without cabinet	H x W x D	mm	430 x 570 x 220	430 x 570 x 220	430 x 753 x 220	430 x 938 x 220	430 x 1122 x 220	430 x 1307 x 220	530 x 1121 x 220
<b>Weight</b>									
With cabinet	2 / 4-pipes	kg	19/20	19/20	22/23	27/29	30/32	35/37	35/37
Without cabinet	2 / 4-pipes	kg	13/14	13/14	15/16	20/22	22/24	26/28	27/29

Energy efficiency class <sup>7)</sup>

Fan coil comfort AC fan		FCEER	A to E	E	E	D	D	D	D	D
2-pipes	FCEER	A to E	E	E	D	D	D	D	D	D
	FCCOP	A to E	E	E	E	E	E	E	E	E
4-pipes	FCEER	A to E	E	D	D	D	E	D	D	D
	FCCOP	A to E	E	D	D	D	E	E	E	E

1) Fan standard factory set speeds. 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) Pressure loss by corresponding nominal flow. 4) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C. 5) According to Eurovent standard. Air: 20 °C, hot water: 65 °C/55 °C. 6) Informative data, considering an hypothetical sound attenuation of the room and installation of 9 dB(A). 7) According to Eurovent. \* Standard configuration with left hand hydraulic connection. G2 air filter included as standard.

## Control options.

**Optional wired remote controller for AC fan, 2-pipe and 4-pipe application.**

PAW-FC-RC1



**Optional wired remote controller for AC fan 2-pipe application.**

PAW-FC-903AC / PAW-FC-907AC



**Optional wired remote controller for EC fan, 2-pipe and 4-pipe application.**

PAW-FC-903EC / PAW-FC-907EC



ErP compliant following COMMISSION REGULATION (EU) 2016/2281.



## Fan coil comfort EC fan

Fan coil floor and ceiling units with cooling and heating.


Cooling capacity: 0,5 to 9,1 kW.

Heating capacity: 0,6 to 12,9 kW.


Optional controller.  
WRC remote control.Optional controller.  
SRC - mini BMS  
controller.Optional controller.  
Electronic controller  
TControl POD glass.Optional controller.  
Electronic controller  
TControl EASY 3S.Optional controller.  
Wired remote controller  
with touch control.  
PAW-FC-907ECOptional controller.  
Wired remote controller.  
PAW-FC-903EC

## Operating limits

Entering water temperature (without glycol).

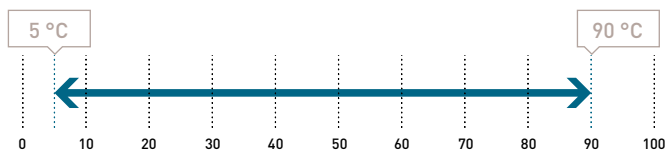

Indoor air temperature.

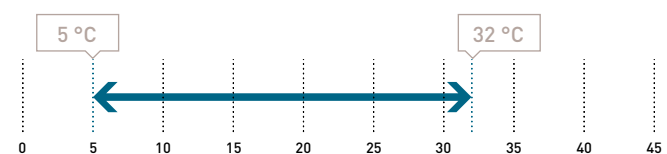

## The range at a glance

- Versions: 2-pipes, 2-pipes + electric heater and 4-pipes
- 8 sizes
- Low energy consumption EC fan: 100% controllable via a 0-10 V signal or 3 operating speeds
- Air flow from 91 to 1548 m<sup>3</sup>/h
- Configuration: universal installation units (vertical or horizontal) with or without cabinet
- Left or right water connections
- Many air inlet/outlet configurations
- G2 air filter (G3 as an accessory)

## Advantages

- Excellent performances: FCEER and FCCOP up to "A"
- Silent units
- New casing design for an increased robustness
- Harmonious and aesthetic RAL 9003 painted cabinet
- Valves, condensate drain pan and drain pump factory mounted
- 100% factory tested

## Accessories and options

2 way or 3 way valves
4-pipes kit (additional coil)
Circuit breakers
Drain pump
Ecospeed card for EC fans
Electric heaters (from 500 W to 2500 W)
Feet with/without grid
Fuse holders
G3 filter
Horizontal or vertical drain guard (with valve)
Many air inlet/outlet configurations
Electromechanical sensor for automatic change over
Modbus communication board for Plologic
MRC/WRC/BRC: remote controls for Plologic
Other speeds configuration (standard factory set speeds in technical features table)
SRC - mini BMS controller
Suspension kit
Plologic controller (other electromechanical or electronic control systems also available)
TControl EASY 3S and TControl POD glass controllers (other electromechanical or electronic control systems also available)

+ SEE PAGE 582 FOR MORE DETAILS ABOUT FAN COIL CONTROLLERS

## AC SELECT.

Smart and user-friendly the new air conditioning selection program: <https://acselect.panasonic.eu/>

Technical features

Fan coil comfort EC fan		P-FC10	P-FC20	P-FC30	P-FC40	P-FC50	P-FC60	P-FC70	P-FC80	
		2V/5V/10V <sup>1)</sup>	2V/5V/10V <sup>1)</sup>	2V/6V/10V <sup>1)</sup>	2V/5V/10V <sup>1)</sup>	2V/7V/10V <sup>1)</sup>	2V/7V/10V <sup>1)</sup>	4V/8V/10V <sup>1)</sup>	3V/4,1V/6,4V <sup>1)</sup>	
<b>2-pipes</b>										
Total cooling capacity <sup>2)</sup>	kW	0,59/1,16/1,96	0,61/1,31/2,12	0,67/1,41/1,83	1,34/2,93/4,19	1,34/3,57/4,98	1,98/4,45/5,24	2,55/5,56/6,55	4,59/6,13/8,36	
Sensible capacity <sup>2)</sup>	kW	0,48/1,00/1,76	0,47/1,06/1,72	0,47/1,04/1,34	0,95/2,10/3,00	1,05/2,70/3,70	1,35/3,51/4,02	1,91/4,10/4,96	3,32/4,51/6,28	
Water flow <sup>2)</sup>	l/h	102/200/338	105/226/365	141/336/505	231/505/722	231/615/858	341/767/903	439/958/1128	791/1056/1440	
Water pressure drop <sup>2)3)</sup>	kPa	7,5/25,7/69,5	1,4/4,3/9,3	5,9/21,8/42,9	6,4/24,3/46,3	4,9/28,7/53,9	7,8/35,8/49,0	2,7/12,6/17,5	11,8/19,5/34,2	
Heating capacity <sup>4)</sup>	kW	0,67/1,30/2,31	0,68/1,53/2,52	0,80/1,72/2,66	1,11/2,48/4,46	1,38/3,89/5,19	1,95/4,93/5,82	3,05/5,81/7,17	4,63/6,39/9,28	
Water flow <sup>4)</sup>	l/h	115/224/398	117/264/434	138/296/458	191/427/768	238/670/894	336/849/1002	525/1001/1235	798/1101/1598	
Water pressure drop <sup>2)4)</sup>	kPa	6,5/20,6/59,1	1,7/5,5/12,4	4,1/14,2/30,4	4,8/18,1/51,9	3,8/25,7/44,6	12,2/70,7/97,5	3,9/13,8/20,9	11,9/21,0/41,5	
<b>4-pipes</b>										
Total cooling capacity <sup>2)</sup>	kW	0,51/1,02/1,80	0,57/1,20/2,18	0,75/1,84/2,93	1,03/2,20/3,52	1,17/3,45/4,39	1,69/3,90/4,69	2,44/4,88/6,06	4,44/5,86/9,07	
Sensible capacity <sup>2)</sup>	kW	0,41/0,87/1,60	0,43/0,96/1,76	0,55/1,44/2,28	0,73/1,57/2,58	0,92/2,61/3,28	1,12/3,05/3,63	1,83/3,61/4,53	3,20/4,31/6,84	
Water flow <sup>2)</sup>	l/h	87,8/176/310	98,2/207/376	129/317/505	177/379/606	202/594/756	291/672/808	420/841/1044	765/1009/1562	
Water pressure drop <sup>2)3)</sup>	kPa	5,2/18,3/53,4	1,3/3,8/9,7	4,0/13,7/28,0	9,3/27,8/58,9	2,3/16,2/25,6	4,6/22,0/31,4	3,2/12,3/18,8	18,8/30,6/67,2	
Heating capacity <sup>5)</sup>	kW	0,61/1,13/1,87	0,79/1,33/2,09	1,41/2,01/2,77	1,57/2,49/3,62	2,18/3,34/4,10	1,81/4,05/4,81	3,45/4,67/5,53	5,74/7,99/12,90	
Water flow <sup>5)</sup>	l/h	52,5/97,3/161	68/115/180	121/173/239	135/214/312	188/288/353	156/349/414	297/402/476	494/688/1111	
Water pressure drop <sup>2)5)</sup>	kPa	1,1/2,4/4,8	<1/2,0/4,8	7,9/12,3/18,6	10,9/22,2/41,1	6,5/13,6/19,6	16,1/45,3/57,5	32,2/53,9/72,4	19,2/34,5/83,1	
<b>Sound levels</b>										
Sound power	2-pipes	dB(A)	34/47/60	34/47/60	31/50/59	29/44/52	30/51/57	32/54/58	40/54/59	51/56/64
	4-pipes	dB(A)	34/47/60	34/47/60	31/50/59	29/44/56	30/51/57	32/54/58	40/54/59	51/56/64
Sound pressure <sup>6)</sup>	2-pipes	dB(A)	25/38/51	25/38/51	22/41/50	20/35/43	21/42/48	23/45/49	31/45/50	42/47/55
	4-pipes	dB(A)	25/38/51	25/38/51	22/41/50	20/35/43	21/42/48	23/45/49	31/45/50	42/47/55
NR <sup>6)</sup>	2-pipes		20/33/46	20/33/46	17/36/45	15/30/38	16/37/43	18/40/44	26/40/45	37/42/50
	4-pipes		20/33/46	20/33/46	17/36/45	15/30/38	16/37/43	18/40/44	26/40/45	37/42/50
<b>Ventilation</b>										
Number of fans			1	1	1	2	2	2	2	3
Air flow	2-pipes	m <sup>3</sup> /h	108/228/417	98/234/413	119/257/345	170/412/678	203/577/816	245/737/912	350/850/1050	685/927/1398
	4-pipes	m <sup>3</sup> /h	91/199/379	84/200/380	123/297/540	148/298/524	185/587/755	205/668/845	329/798/989	660/884/1548
Filter			G2	G2	G2	G2	G2	G2	G2	G2
<b>Electrical data</b>										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
Consumption	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
	2-pipes	W	7/12/41	7/13/41	6/16/42	2/13/43	4/23/46	4/30/54	11/44/77	23/42/108
4-pipes	W	7/12/39	7/13/40	6/14/40	2/11/39	4/23/44	4/28/52	11/43/75	22/41/116	
Electric heater	W		500	500	500/1000	1250	1250/2500	1250/2500	1250/2500	1250/2500
<b>Water connections</b>										
Connection type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	
2 or 4-pipes	Cooling	Inch	½	½	½	½	½	¾	¾	
4-pipes	Heating	Inch	½	½	½	½	½	½	½	
<b>Dimension</b>										
With cabinet - without feet	HxWxD	mm	477x766x225	477x766x225	477x951x225	477x1136x225	477x1321x225	477x1506x225	575x1319x225	575x1506x225
Without cabinet	HxWxD	mm	430x570x220	430x570x220	430x753x220	430x938x220	430x1122x220	430x1307x220	530x1121x220	530x1316x220
<b>Weight</b>										
With cabinet	2 / 4-pipes	kg	19/20	19/20	22/23	27/29	30/32	35/37	35/37	47/49
Without cabinet	2 / 4-pipes	kg	13/14	13/14	15/16	20/22	22/24	26/28	27/29	38/40

Energy efficiency class<sup>7)</sup>

Fan coil comfort EC fan		FCEER	A to E	C	C	B	A	A	A	B	B
2-pipes	FCEER	A to E	C	C	B	A	A	A	B	B	B
	FCCOP	A to E	D	C	C	B	A	B	B	B	B
4-pipes	FCEER	A to E	C	C	B	A	B	B	B	B	A
	FCCOP	A to E	C	C	B	A	B	B	B	B	A

1) Fan standard factory set speeds (voltage). 2) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 3) Pressure loss by corresponding nominal flow. 4) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C. 5) According to Eurovent standard. Air: 20 °C, hot water: 65 °C/55 °C. 6) Informative data, considering an hypothetical sound attenuation of the room and installation of 9 dB(A). 7) According to Eurovent. \* Standard configuration with left hand hydraulic connection. G2 air filter included as standard.

Control options.

Optional wired remote controller for AC fan, 2-pipe and 4-pipe application.  
PAW-FC-RC1



Optional wired remote controller for AC fan 2-pipe application.  
PAW-FC-903AC / PAW-FC-907AC



Optional wired remote controller for EC fan, 2-pipe and 4-pipe application.  
PAW-FC-903EC / PAW-FC-907EC



ErP compliant following COMMISSION REGULATION (EU) 2016/2281.




NEW fan coil wall DC fan – FK1

Fan coil wall units with new stylish design and nanoe™ X (Mark 3).

Cooling capacity: 1,9 to 5,2 kW.

Heating capacity: 2,2 to 5,3 kW.

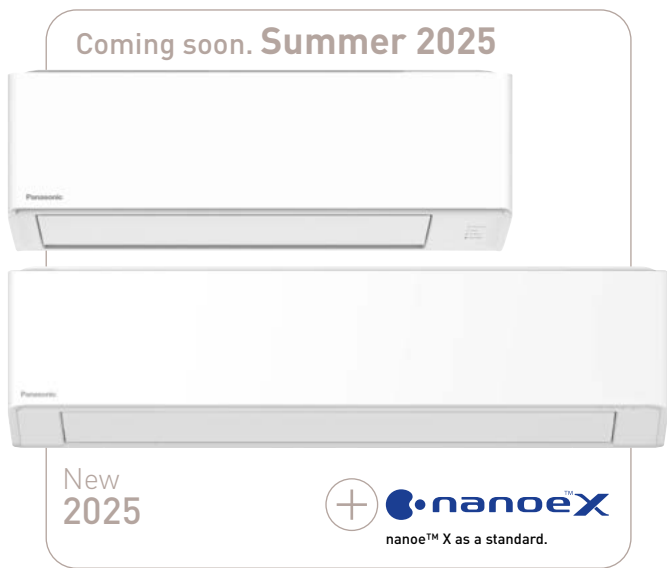

Optional controller. WRC remote control.



Optional controller. SRC - mini BMS controller.



Optional controller. Electronic controller TControl POD glass.



Optional controller. Electronic controller TControl EASY 3S.



Optional controller. Wired remote controller with touch control. PAW-FC-907EC



Optional controller. Wired remote controller. PAW-FC-903EC



Optional controller. CONEX Series, white or black. CZ-RTC6W/BL/BLW2 or CZ-RTC6/BL/BLW2



Optional controller. Wired remote controller with Econavi function. CZ-RTC5B



Optional controller. Infrared remote controller for wall-mounted. CZ-RWS3

The range at a glance

- Versions (2-pipes): with 3 way valve
- 6 sizes
- DC fan for better efficiency and control
- Air flow from 360 to 1045 m³/h
- G1 cleanable air filter

Advantages


- Modern stylish design with flat face and compact size
- Motorized louvers
- Six directional piping outlet
- nanoe™ X (Generator Mark 3) as standard for better indoor air quality
- Quieter operation than AC fan models
- Very easy servicing through a removable front panel
- Cleanable synthetic-type air filter
- Compatibility with a wide range of controllers
- Ideal for commercial and residential applications in combination with Aquarea Heat Pumps

Accessories and options

- Modbus communication board for Plologic
- SRC - mini BMS controller
- WRC: wall-mounted remote control for Plologic
- Plologic controller (other electromechanical or electronic control systems also available)
- TControl EASY 3S and TControl POD glass controllers (other electromechanical or electronic control systems also available)
- CZ-RWS3 - infrared remote controller
- CZ-RTC5B - wired remote controller with Econavi function
- CZ-RTC6 - CONEX Series wired remote controller
- CZ-CENSC1 - Econavi energy saving sensor


Operating limits

Entering water temperature (without glycol).

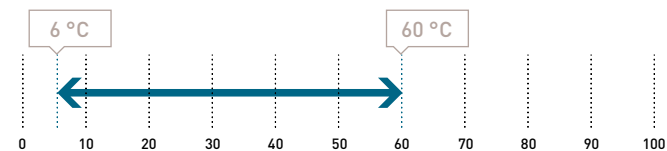

Maximum operating pressure: 10 bar.

Indoor air temperature.

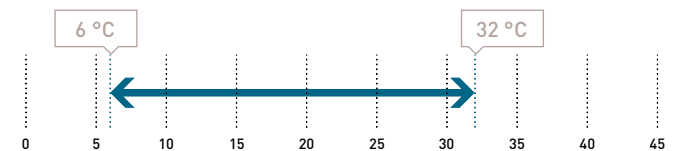

+ SEE PAGE 582 FOR MORE DETAILS ABOUT FAN COIL CONTROLLERS

AC SELECT.

Smart and user-friendly the new air conditioning selection program: <https://acselect.panasonic.eu/>



Technical features

Fan coil wall DC fan - FK1		S-19FK1E	S-24FK1E	S-27FK1E	S-36FK1E	S-45FK1E	S-52FK1E
		H/M/L	H/M/L	H/M/L	H/M/L	H/M/L	H/M/L
<b>2-pipes, with/without 3 way valve</b>							
Total cooling capacity <sup>1)</sup>	kW	1,90/1,65/1,40	2,41/2,17/1,92	2,73/2,51/2,02	3,61/3,11/2,65	4,50/3,78/3,02	5,23/4,63/4,03
Sensible capacity <sup>1)</sup>	kW	1,54/1,35/1,10	1,91/1,71/1,50	2,19/2,00/1,59	2,98/2,52/2,12	3,41/2,84/2,25	4,02/3,51/3,04
Water flow <sup>1)</sup>	l/h	342/295/250	432/389/344	489/449/362	648/556/473	809/680/539	908/830/724
Water pressure drop (coil only)	kPa	8/6/4	13/11/8	17/14/9	30/22/16	42/30/19	56/44/34
Water pressure drop (with 3 way valve) <sup>1)</sup>	kPa	29/23/18	36/29/25	44/39/26	74/57/42	110/80/53	142/112/90
Air flow <sup>1)</sup>	m <sup>3</sup> /h	345/276/230	416/361/324	480/434/343	710/572/462	753/603/488	879/753/637
Input power <sup>1)</sup>	W	12/11/10	14/12/12	16/14/12	26/19/15	22/17/13	29/23/18
Sound pressure Lp <sup>1)2)</sup>	dB(A)	27	26	29	39	35	40
Sound power Lw <sup>1)</sup>	dB(A)	43	42	45	55	51	56
Heating capacity <sup>3)</sup>	kW	2,23/1,92/1,59	2,72/2,39/1,97	3,01/2,64/2,18	4,03/3,48/2,89	5,13/4,21/3,09	5,33/4,72/4,03
Water flow <sup>3)</sup>	l/h	381/329/281	481/417/339	533/463/379	715/614/508	898/740/544	931/827/710
Water pressure drop (coil only)	kPa	10/8/5	16/12/8	20/15/10	36/27/18	52/36/19	56/44/33
Water pressure drop (with 3 way valve) <sup>3)</sup>	kPa	30/24/18	39/31/23	47/36/25	72/60/42	118/82/46	128/97/74
Air flow <sup>3)</sup>	m <sup>3</sup> /h	406/314/253	489/425/343	545/471/379	765/646/517	925/730/511	960/810/672
Input power <sup>3)</sup>	W	13/12/10	15/14/12	17/15/13	28/21/16	32/21/14	35/26/19
Sound pressure Lp <sup>2)3)</sup>	dB(A)	29/27/24	29/26/22	32/28/23	41/36/30	42/36/28	43/39/34
Sound power Lw <sup>3)</sup>	dB(A)	45/43/40	45/42/38	48/44/39	57/52/46	58/52/44	59/55/50
<b>Water Connection</b>							
Connection type		Gas female threaded	Gas female threaded	Gas female threaded	Gas female threaded	Gas female threaded	Gas female threaded
	Inch	1/2	1/2	1/2	1/2	1/2	1/2
nanoe X Generator		Mark 3	Mark 3	Mark 3	Mark 3	Mark 3	Mark 3
<b>Dimensions and weight</b>							
Dimension	H x W x D	mm 295 x 890 x 244	295 x 890 x 244	295 x 890 x 244	295 x 890 x 244	295 x 1060 x 249	295 x 1060 x 249
Weight	kg	12	13	13	13	14	14

Energy efficiency class <sup>1)</sup>

Fan coil wall DC fan - FK1		S-19FK1E		S-24FK1E		S-27FK1E		S-36FK1E		S-45FK1E		S-52FK1E	
2-pipes	FCEER <sup>1)</sup>	A to E	B	B	B	B	B	A	A				
	$\eta_{s,c}$	%	144,2	166,9	172,1	169,3	226,8	213,0					
	FCCOP <sup>3)</sup>	A to E	B	B	B	B	B	B					
	$\eta_{s,h}$	%	160,0	167,0	170,5	173,4	208,5	198,0					

1) According to Eurovent standard. Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C. 2) The sound pressure of the indoor unit shows the value measured of a position of 1 m in front of the main body and 0,8 m below the unit. The sound pressure is measured in accordance with JIS C 9612. 3) According to Eurovent standard. Air: 20 °C, hot water: 45 °C/40 °C.

New fan coil wall.

First Panasonic water fan coil unit integrated with nanoe™ X technology.

Fan coil wall unit with stylish design, ideal for commercial and residential applications in combination with Aquarea Heat Pumps. The units are integrated with nanoe™ X technology to improve protection 24/7 (Generator Mark 3).

Bringing nature's balance indoors.

The new fan coil wall is equipped with nanoe™ X for improved indoor air quality. nanoe™ X, technology with the benefits of hydroxyl radicals.



7 effects of nanoe™ X – Panasonic unique technology.

Capacity to inhibit 5 types of pollutants



Bacteria and viruses



Mould



Allergens



Pollen



Hazardous substances

Deodorises



Odours

Moisturises



Skin and hair




ErP compliant following COMMISSION REGULATION (EU) 2016/2281.



# Sanitary tanks

## Combo tanks.

The best option to combine with Mono-bloc units. DHW tank with buffer tank. Designed for retrofit applications, the DHW tank with a buffer tank is particularly suitable for fast integration on an existing installation. Easy to install, nice looking, high efficiency for DHW production and for heating.

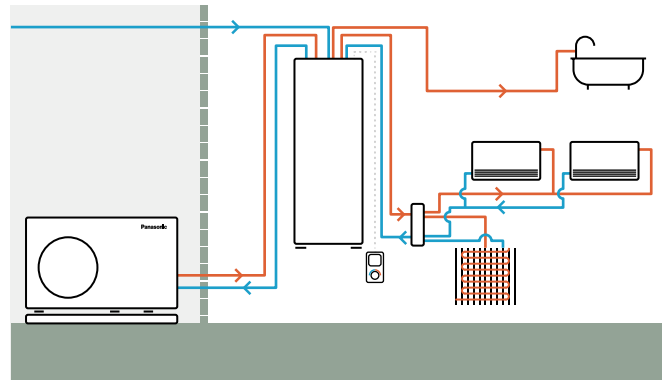

Model	PAW-TD20B8E3-2		PAW-TD23B6E5	
Material	Enamelled		Stainless steel	
Dimension HxWxD	mm 1770x640x690		1750x600x646	
Weight (empty)	kg 150		111	
Water volume	L 185 + 80		230 + 60	
Power supply	V, Phase, Hz 230, 1, 50		230, 1, 50	
	<b>Hot water tank</b>	<b>Buffer tank</b>	<b>Hot water tank</b>	<b>Buffer tank</b>
Water volume	L 185	80	230	60
Max working pressure	MPa (bar) 0,8 (8)	0,6 (6)	1,0 (10)	0,3 (3,0)
Pressure test	MPa (bar) 1,2 (12)	0,9 (9)	1,5 (15)	0,39 (3,9)
Max working temp	°C 90	90	80	80
Connections	mm Ø22		Ø22	Ø22, copper
Material	S 275 JR vitrified		EN 14521	EN 14521
Insulation	Material, t=mm	PUR, 50	PUR, 50	PUR, 50
Heating coil surface	m <sup>2</sup>	2,1	—	—
Electrical heater	W	3000	—	—
Energy loss at 65 °C <sup>1)</sup>	kWh/24h	1,3	—	—
<b>Energy efficiency class (from A+ to F)<sup>2)</sup></b>	<b>B</b>		<b>B</b>	<b>A</b>
Standing loss	W	53	46	29

1) Tested pursuant to EN 12897:2006. 2) EU Regulation 812/2013. \* Enamelled Combo tank is produced by Lapesa. Stainless steel Combo tank is produced by OSO.



## Buffer tanks.

Model	PAW-BTANK50L-2	PAW-BTANK100L	PAW-BTANKG200L	PAW-BTANKG260L
Water volume	L 48	100	194	252
Energy losses	W 35	55	60	83
<b>Energy efficiency class (from A+ to F)</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>C</b>
Material	Stainless steel	Stainless steel	Carbon Steel	Carbon Steel
Dimension (Height / Diameter)	mm 636 / 430	1175 / 430	983 / 620	1239 / 620
Net weight	kg 17	28	41	46

\* Automatic air vent and drain cock are included. Built-in pocket sensor (sensor not included). \*\* 50 and 100 L Buffer Tanks are produced by OSO. 200 and 260 L Buffer Tanks are produced by Lapesa.



## Enamelled tanks.

Type	Enamelled tank				Enamelled 2 coils tank (for bivalent solar + HP)	Square tank	
	PAW-TA15C1E5	PAW-TA20C1E5STD	PAW-TA30C1E5STD	PAW-TA40C1E5STD	PAW-TA30C2E5STD	PAW-TA20C1E5C	
Water volume	L	167	200	290	380	350	200
Maximum water temperature	°C	90	95	95	95	95	95
Dimension (Height / Diameter)	mm	1297/560	1340/610	1800/610	1835/670	1835/670	1550x600x600
Weight / filled with water	kg	88/255	90/280	120/389	191/572	169/519	134/327
Electric heater	kW	—	3,00	3,00	3,00	3,00	—
Power supply	V	—	230	230	230	230	—
Material inside tank		Enamelled	Enamelled	Enamelled	Enamelled	Enamelled	Enamelled
Exchange surface	m <sup>2</sup>	1,8	1,8	2,6	3,8	3,5 / 1,2	1,83
Energy loss at 65 °C <sup>1)</sup>	kWh/24h	1,08	1,37	1,61	1,76	1,76	1,37
3 way valve accessory PAW-3WYVLV-HW, CZ-NV1 or CZ-NV2		Optional	Optional	Optional	Optional	Optional	Built-in 3 way valve
20 m temperature sensor cable included		Yes	Yes	Yes	Yes	Yes	Yes
Energy losses	W	45	57	67	73	73	57
<b>Energy efficiency class (from A+ to F)</b>		<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>	<b>B</b>
Warranty of the inner vessel		2 Years	2 Years	2 Years	2 Years	2 Years	2 Years
Maintenance required		Anode <sup>2)</sup>	Anode <sup>2)</sup>	Anode <sup>2)</sup>	Anode <sup>2)</sup>	Anode <sup>2)</sup>	Anode <sup>2)</sup>

1) Insulated tested under EN12897. 2) Refer to the service manual for further details. \* PAW-TA15C1E5 is produced by Lapesa. All other Enamelled tanks and Square tank are produced by AEmail.



## Stainless steel tanks.

Model		PAW-TD20C1E5-1	PAW-TD30C1E5-1	PAW-TD30C1E5HI-1
Water volume	L	192	284	280
Maximum water temperature	°C	75	75	75
Dimension (Height / Diameter)	mm	1270/595	1750/595	1750 / 595
Weight / filled with water	kg	50/—	61/—	65 / —
Electric heater	kW	1,5	1,5	1,5
Power supply	V	230	230	230
Material inside tank		Stainless steel	Stainless steel	Stainless steel
Exchange surface	m <sup>2</sup>	1,8	1,8	2,35
Energy loss at 65 °C <sup>1)</sup>	kWh/24h	1,01	1,18	1,18
3 way valve accessory PAW-3WYVLV-HW, CZ-NV1 or CZ-NV2		Optional	Optional	Optional
20 m temperature sensor cable included		Yes	Yes	Yes
Energy losses	W	42	49	49
<b>Energy efficiency class (from A+ to F)</b>		<b>A</b>	<b>A</b>	<b>A</b>
Warranty		2 Years	2 Years	2 Years
Maintenance required		No	No	No

1) Insulated tested under EN12897. \* Stainless steel tanks are produced by OSO.

### Accessories for sanitary tanks


<b>PAW-3WYVLV-HW</b>	3 way valve for DHW tanks
<b>CZ-NV1</b>	3 way valve kit to fit inside the hydrokit. H and J Series
<b>CZ-NV2</b>	3 way valve kit to fit inside the hydrokit. K and L Series

### Accessories for sanitary tanks

<b>PAW-EANODE2</b>	Impressed current anode for 200 L Stainless steel tanks
<b>PAW-EANODE3</b>	Impressed current anode for 300 L Stainless steel tanks

# Heat recovery ventilation unit

The heat recovery ventilation unit is design not only to provide a good indoor air quality, but it is also designed to recover heat that would otherwise be lost throughout ventilation. These heat recovery ventilation systems are used to assist in the retention of heat.

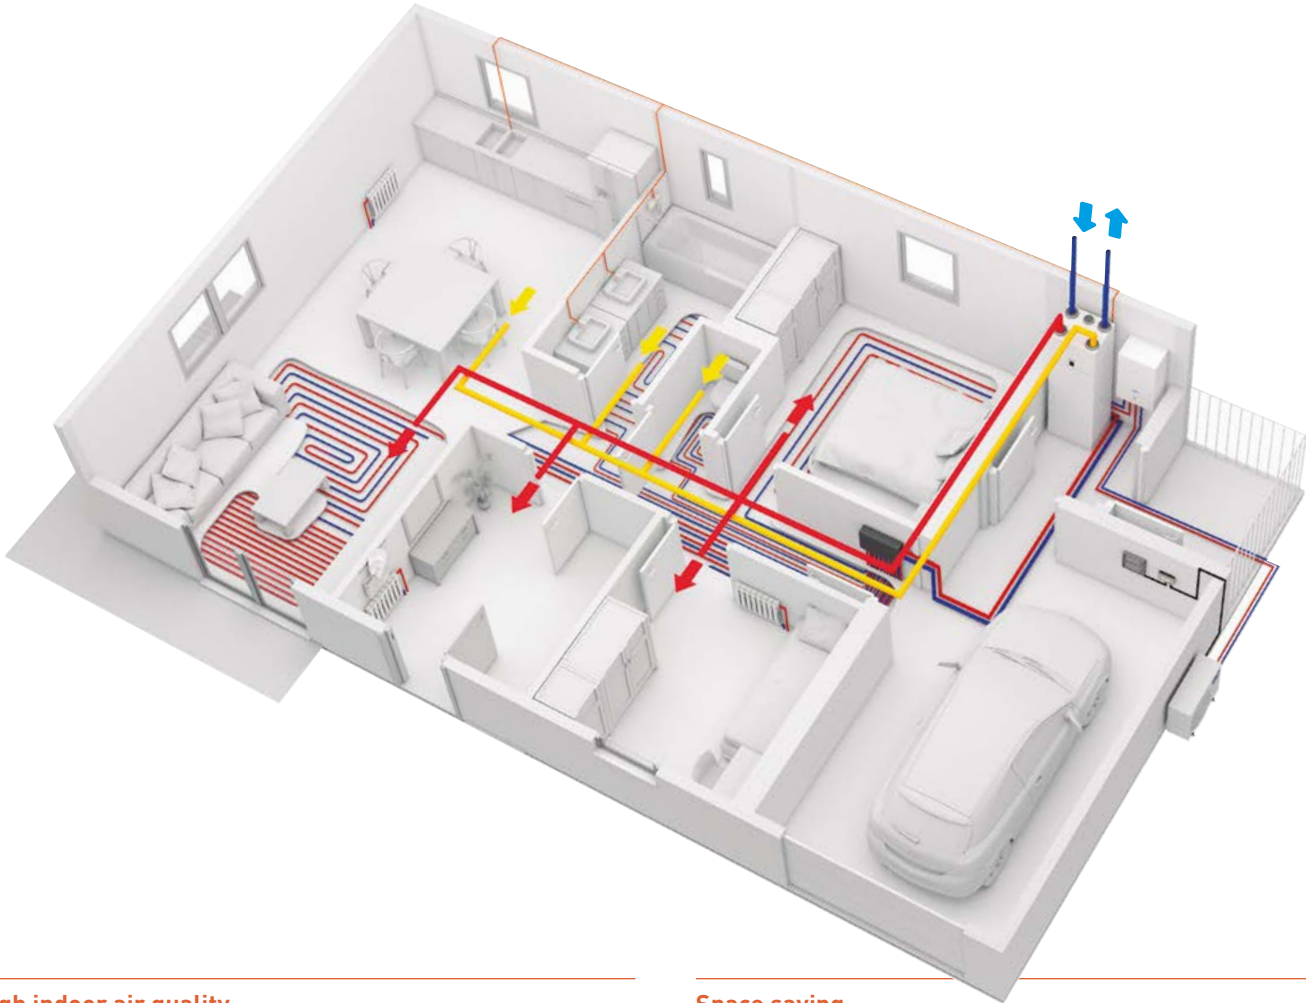

### High indoor air quality

The unit is designed to provide fresh filtered air into the home, while keeping a high thermal comfort.

### Energy saving

Most of the energy from the exhausted air is used to precondition the incoming air, leading to lower heating requirements in the building.

### Space saving

The compact ventilation unit can be installed over the DHW square tank or the Aquarea All in One Compact indoor unit for a space-saving solution.

### Better user interface

The Residential ventilation unit and the Aquarea Heat Pumps can be controlled with one single user-friendly controller.

## AQUAREA

Combine the Residential ventilation unit with Panasonic Aquarea for an space saving and highly efficient solution for heating, cooling, ventilation and DHW.



Heat Recovery Ventilation + Aquarea All in One Compact



Heat Recovery Ventilation + DHW Square Tank + Aquarea Mono-bloc



Heat Recovery Ventilation + DHW Square Tank + Aquarea Bi-bloc

\* The unit can be mounted on a PAW-TA20C1E5C, on a WH-ADC0309J3E5C or installed on the wall (PAW-VEN-WBRK is needed).

## Heat recovery ventilation unit



PAW-A2W-VENTA-R

PAW-A2W-VENTA-L



Model		PAW-A2W-VENTA-R	PAW-A2W-VENTA-L
Nominal air flow rate	m <sup>3</sup> /h		204 @ 50 Pa
Maximum air flow rate	m <sup>3</sup> /h		292 @ 100 Pa
SPF			1,24 @ 204 m <sup>3</sup> /h
Heat exchanger rotor drive type			Variable speed
Exchanger type			Rotating
Heat recovery efficiency			84%
Power supply	V / Hz		230 / 50 / Single phase
Power consumption	W		176
<b>Energy class, basic unit</b>			<b>A</b>
<b>Energy class, unit with local control on demand</b>			<b>A</b>
Noise level	dB(A)		40
Dimension (H x W x D)	mm		450 x 598 x 500
Weight	kg		46
Mounting position			Vertical
Supply side		Right	Left
Duct connections	mm		DN125
Filter class, supply air			F7/ePM1 60%
Filter class, extract air			M5/ePM10 50%
Minimum outdoor temperature	°C		-20

\* Heat recovery efficiency according to EN 13141-7. \*\* Heat recovery ventilation unit is produced by Systemair.

Accessories	
<b>PAW-VEN-FLTKIT</b>	Supply and extract filters kit
<b>PAW-VEN-ACCPCB</b>	Optional PCB for additional functions
<b>PAW-VEN-DPL</b>	HRV touch control panel. White frame (cable must be ordered separately)
<b>PAW-VEN-CBLEXT12</b>	Cable with plug for electrical connection between unit and control panel, type CE and CD (12 m)
<b>PAW-VEN-DIVPLG</b>	Twin plugs for installation of several control panels type CD or CE for one unit

Accessories	
<b>PAW-VEN-DPLBOX</b>	HRV touch control panel wall-mounted kit
<b>PAW-VEN-S-CO2RH-W</b>	CO <sub>2</sub> RH wall-mounted sensor
<b>PAW-VEN-S-CO2-W</b>	CO <sub>2</sub> wall-mounted sensor
<b>PAW-VEN-S-CO2-D</b>	CO <sub>2</sub> duct sensor
<b>PAW-VEN-WBRK</b>	Wall bracket kit for stand-alone installation on the wall
<b>PAW-VEN-HTR06</b>	Electrical duct heater 0,6 kW (includes relay)
<b>PAW-VEN-HTR12</b>	Electrical duct heater 1,2 kW (includes relay)



## Main features of the residential ventilation unit

- Designed for areas up to approximately 140 m<sup>2</sup>
- High energy-efficiency rotary heat exchanger with EC - technology fans
- Moisture transfer function to minimize condensation in supply air during wintertime
- The built in humidity sensor in extract air can be used for demand control
- Control via touch display and Startup Wizard for easy commissioning
- Modbus communication via RS-485
- Option to control an Aquarea H Series onwards heat pump from PAW-A2W-VENTA control panel Modbus gateway (PAW-AZAW-MBS-M or PAW-AW-MBS-H) and PAW-VEN-ACCPCB required

## Control user-friendly interface

All settings and features accessible via a control panel, integrated into the front cover. The option for connecting one or more external control panels is available.

- Color touch screen with a user-friendly interface
- MANUAL and AUTO mode or choose preferred settings from the pre-configured user modes
- If Aquarea H and J Series heat pumps are connected with PAW-A2W-VENTA, the heat pump control options appear on the home screen in a separate tab

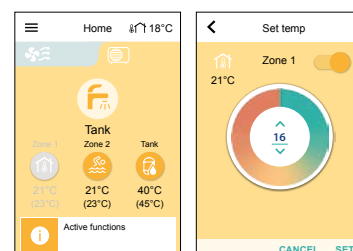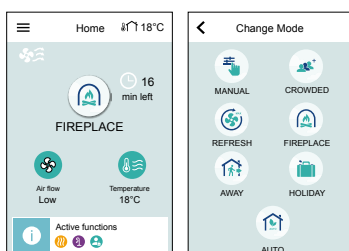


## Aquarea Vent - Counter flow ventilation

Aquarea Vent systems provide a continuous supply of fresh air, ensuring optimal indoor air quality and comfort. Ideal for single-family homes or apartments with low energy requirements, Panasonic's HRV systems combine high-efficiency heat recovery, quiet operation, and advanced air filtration with flexible installation options.



High-efficiency sensible heat recovery.



Highly efficient air renewal and filtration, with 80% ePM1 filters.




Integrated air quality, humidity and temperature sensors.



Remote control via Wi-Fi (optional).

### Balanced ventilation

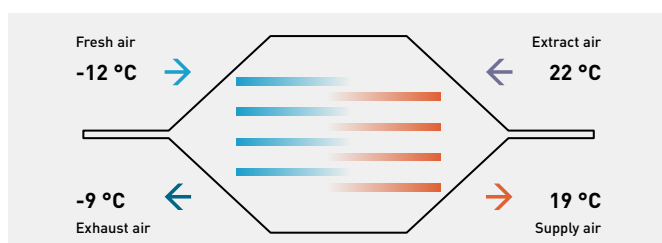

Counter flow ventilation units are equipped with two fans to supply and extract air. A cross-flow heat exchanger recovers the energy contained in the extracted air and transfers it to the supplied air. This significantly reduces the building's energy consumption, while at the same time keeping a good quality of the indoor air.



**Aquarea Vent - Counter flow ventilation units**



PAW-VENTX10-15-20-25Z-1

PAW-VENTX20-30-40-50V-1

PAW-VENTX20-30-40-50H-1



**+** REFER TO PAGE 137 FOR THE COMPLETE LIST OF FILTERS AND ACCESSORIES FOR AIR DISTRIBUTION AND DIFFUSION SYSTEMS

Compact (Horizontal / Vertical mounting)		Air flow	Static pressure	Recovery efficiency	Energy class	Power supply	Power consumption	Sound power LWA	Dimensions / Net weight	Filter class	Duct connection
		Nominal / Max	Nominal / Max			Voltage / Phase / Frequency	Nominal		H x W x D		
		m <sup>3</sup> /h	Pa	%			W	dB(A)	mm / kg		
Universal mounting	<b>P-VEN15XQAZE5</b>	91/130	50/100	87	<b>A</b>	230 V / Single phase / 50 Hz	80	48	255x580x580 /19	ePM1 80%	160
	<b>P-VEN20XQAZE5</b>	147/210	50/100	85	<b>A</b>	230 V / Single phase / 50 Hz	140	51	255x580x580 /19	ePM1 80%	160
Horizontal mounting	<b>P-VEN15XQAEH5</b>	109/155	50/100	86	<b>A</b>	230 V / Single phase / 50 Hz	110	49	260x480x800 /25	ePM1 80%	160
	<b>P-VEN30XQAEH5</b>	210/300	50/100	85	<b>A</b>	230 V / Single phase / 50 Hz	180	50	295x600x795 /30	ePM1 70%	160
	<b>P-VEN35XQAEH5</b>	238/340	50/100	89	<b>A</b>	230 V / Single phase / 50 Hz	350	52	290x650x1150 /38	ePM1 70%	160
	<b>P-VEN45XQAEH5</b>	288/455	50/100	88	<b>A</b>	230 V / Single phase / 50 Hz	420	56	290x1150x1150 /40	ePM1 70%	160
Vertical mounting	<b>P-VEN15XQAVE5</b>	112/170	50/100	86	<b>A</b>	230 V / Single phase / 50 Hz	110	48	510x430x625 /32	ePM1 80%	160
	<b>P-VEN30XQAVE5</b>	210/300	50/100	86	<b>A</b>	230 V / Single phase / 50 Hz	180	50	590x575x785 /38	ePM1 70%	160
	<b>P-VEN40XQAVE5</b>	266/380	50/100	87	<b>A</b>	230 V / Single phase / 50 Hz	350	51	590x735x785 /42	ePM1 70%	160
	<b>P-VEN45XQAVE5</b>	315/450	50/100	86	<b>A</b>	230 V / Single phase / 50 Hz	420	54	590 x 785 x 735 /43	ePM1 70%	160

**Control options (required, to be ordered separately).**

**Wall-mounted control with Modbus.**

PCZ-AHRP0025



- Integrated VOC - CO<sub>2</sub> air quality sensors
- Integrated humidity sensors
- Integrated temperature sensors
- Unit control and settings: Seasonal modes, temperature and fan speed ventilation settings
- Connectivity: Wi-Fi or Modbus


**Wall-mounted control with integrated Wi-Fi for remote control via the Aquarea Home App.**

PCZ-AHRP0026

**Vent PRO.**

From selecting the right ventilation unit to planning the air distribution system and choosing the appropriate components, the Vent PRO guides you through every step to ensure the optimal solution for your project.

Access the tool via the 'Tools' section in the Panasonic Pro Club ([www.panasonicproclub.com](http://www.panasonicproclub.com)).

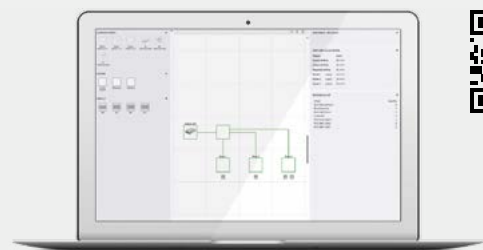

**Remote control with Aquarea Home App.**

\* Requires Wi-Fi control or Home Network Hub PCZ-ESW737.



Aquarea Home



## Aquarea DHW Heat Pumps

Using the natural refrigerant R290, Aquarea DHW Heat Pumps achieve the highest A+ energy efficiency class in their category, significantly reducing energy consumption and CO<sub>2</sub> emissions compared to electric heaters. The range includes wall-mounted and floor-standing models with tank capacities from 100 to 260 litres, designed to meet different household needs.



A+

**High performance and  
A+ energy rank.**

-7°C  
+43°C

**Wide operation  
range.**



**Saves maintenance time  
with dry check for  
magnesium anode.**



**User-friendly  
touch control.**

### Wall mounted version.

- 100 L and 150 L DHW tank
- Wide operating range from -5 to +43 °C.
- 60 °C hot water only with heat pump



### Floor standing version.

- 200 L and 260 L DHW tank
- Version with additional coil for operation with other heat sources such as PV panels
- Wide operating range from -7 to +43 °C
- 65 °C hot water only with heat pump



## Aquarea DHW Heat Pumps





Type	Wall-mounted			Floor-standing			
	Reference	P-DHW100AE5	P-DHW150AE5	P-DHW200AE5	P-DHW200CAE5	P-DHW260AE5	P-DHW260CAE5
<b>Performance according to EN 16147</b>							
Reference hot water temperature ( $T_{ref}$ )	°C	55	55	55	55	55	55
Heating up time (A +14 °C / W 55 °C)	h:m	5:44	8:46	7:22	7:18	9:36	9:45
Heating up time (A +7 °C / W 55 °C)	h:m	6:44	10:08	7:01	7:08	10:21	10:32
Heating up time (A +2 °C / W 55 °C)	h:m	9:53	12:17	11:32	11:21	14:31	14:42
DHW tank ERP efficiency average / warm / cold	A+ to F	A+/A++/A	A+/A+/A	A+/A++/A	A+/A++/A	A+/A++/A	A+/A+/A
DHW tank ERP average climate $\eta$ / COPdHW	$\eta_{wh} \%$ / COPdHW	117/2,80	117/2,80	149/3,58	148/3,53	150/3,64	148/3,59
DHW tank ERP warm climate $\eta$ / COPdHW	$\eta_{wh} \%$ / COPdHW	132/3,20	132/3,34	159/3,81	158/3,78	162/3,90	158/3,84
DHW tank ERP cold climate $\eta$ / COPdHW	$\eta_{wh} \%$ / COPdHW	92/2,20	102/2,40	110/2,67	108/2,61	120/2,91	117/2,85
Indoor sound power <sup>1)</sup>	dB(A)	45	45	50	50	50	50
Outdoor sound power <sup>1)</sup>	dB(A)	50	50	50	50	50	50
Load profile		M	L	L	L	XL	XL
Water volume	L	98	143	202	194	260	251
Water volume of mixed water at 40 °C / V40	L	133	172	352	359	262	275
Additional coil exchanger connection		—	—	—	1" M	—	1" M
Additional coil surface	m <sup>2</sup>	—	—	—	1,05	—	1,05
Anticorrosion system	Anode	Magnesium	Magnesium	Magnesium	Magnesium	Magnesium	Magnesium
Anti-legionella cycle		Yes	Yes	Yes	Yes	Yes	Yes
Maximum working pressure - storage tank	Mpa (bar)	0,8 (8)	0,8 (8)	0,8 (8)	0,8 (8)	0,8 (8)	0,8 (8)
Dimension (HxWxD)	mm	1351x520x541	1682x520x541	1621x705x694	1621x705x694	1911x705x694	1911x705x694
Empty weight	kg	56	65	100	115	111	126
Heat pump air intake temperature range	°C	-5 ~ +43	-5 ~ +43	-7 ~ +43	-7 ~ +43	-7 ~ +43	-7 ~ +43
Maximum water temperature / with heater	°C	60/65	60/65	65/75	65/75	65/75	65/75
Refrigerant charge (R290)	kg	0,15	0,15	0,15	0,15	0,15	0,15
Power supply / frequency	V / Hz	230/50	230/50	230/50	230/50	230/50	230/50
Total maximum power consumption	W	1726	1726	1970	1970	1970	1970
Heat pump maximum power consumption	W	276	276	470	470	470	470
Electric heating element power consumption	W	1500	1500	1500	1500	1500	1500
Nominal air flow	m <sup>3</sup> /h	235	235	330	330	330	330
External pressure nominal / maximum	Pa	42/220	42/220	88/220	88/220	88/220	88/220
Duct diameter	mm	125	125	160	160	160	160

1) According to EN12102.


## Space-saving design

Side air ducts for easy installation in rooms as small as 2 metres high.

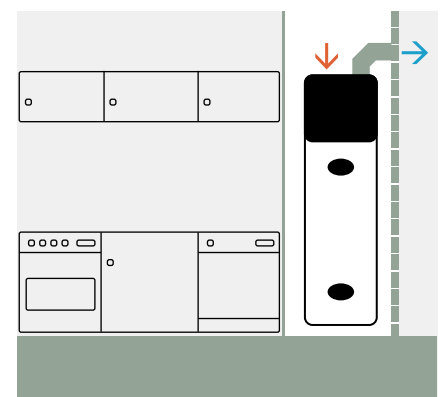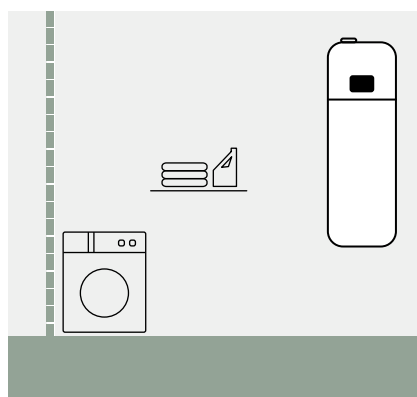




# Accessories and control

## Controls and room thermostats

 <p><b>Remote controller with Wi-Fi adapter (required for stand-alone outdoor units). M Series. Includes 10 m extension cable.</b></p> <p>----- CZ-RTW2TAW1C</p>	 <p><b>Optional remote controller for 2 zone control. K and L Series.</b></p> <p>----- CZ-RTW1</p>	 <p><b>Optional remote controller for 2 zone control. M Series.</b></p> <p>----- CZ-RTW2</p>	 <p><b>Remote control compartment cover for K, L and M Series indoor units.</b></p> <p>----- PAW-A2W-COV-KL</p>	 <p><b>Wired LCD room thermostat with weekly timer.</b></p> <p>----- PAW-A2W-RTWIRED</p>	 <p><b>Wireless LCD room thermostat with weekly timer.</b></p> <p>----- PAW-A2W-RTWIRELESS</p>
---	---	---	---	---	---




## Cascade solutions

 <p><b>Cascade manager for Aquarea Heat Pumps. Cascade up to 10 Aquarea Heat Pumps.</b></p> <p>----- PAW-A2W-CMH-3</p>	 <p><b>Aquarea Cascade Edge (manager) for Aquarea Heat Pumps with P-Smart Edge control and monitoring software. Cascade up to 4 units.</b></p> <p>----- PAW-A2W-CME4</p>	 <p><b>Aquarea Cascade Edge (manager) for Aquarea Heat Pumps with P-Smart Edge control and monitoring software. Cascade up to 10 units.</b></p> <p>----- PAW-A2W-CME10</p>
---	--	--

## PCBs for additional functions

 <p><b>PCB for advanced functions. H and J Series.</b></p> <p>----- CZ-NS4P</p> <p><b>PCB for advanced functions. M Series All in One and Bi-bloc.</b></p> <p>----- CZ-NS6P</p>	 <p><b>PCB for advanced functions. K and L Series.</b></p> <p>----- CZ-NS5P</p> <p><b>PCB for advanced functions. M Series control module.</b></p> <p>----- CZ-NS7P</p>	 <p><b>Wall bracket to mount the All in One 120 L on the wall.</b></p> <p>* Check availability.</p> <p>----- CZ-NW1</p>
--	--	--

## Outdoor unit accessories

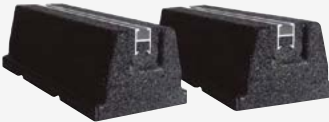 <p><b>Base pan heater for Bi-bloc 3 and 5 kW (except L Series) and K Series 7 and 9 kW (1 fan model).</b></p> <p>----- CZ-NE2P</p> <p><b>Base pan heater. L Series 5, 7 and 9 kW and M Series.</b></p> <p>----- CZ-NE4P</p>	 <p><b>Base pan heater. H and J Series and K Series 9 kW (2 fans model), 12 and 16 kW.</b></p> <p>----- CZ-NE3P</p> <p><b>Base pan heater. M Series 20, 25, 30 kW.</b></p> <p>----- CZ-NE5P</p>	 <p><b>Outdoor base ground support for noise and vibration absorption.</b></p> <p>Dimension (HxWxD): 600 x 95 x 130 mm Safe working load: 500 kg</p> <p>----- PAW-GRDBSE20</p>
--	---	---



**Black ground stand for outdoor unit with 940 mm wide condenser water tray.**

PAW-GRDSTD940



**Black ground stand for outdoor unit with 1100 mm wide condenser water tray.**

PAW-GRDSTD1100


**Electrical heater foil for the ground stand with 940 mm wide condenser water tray.**

PAW-GRDSTDHTR940

**Electrical heater foil for the ground stand with 1100 mm wide condenser water tray.**

PAW-GRDSTDHTR1100

**Hydraulic accessories**



**3 way valve kit to fit inside the hydrokit. H and J Series.**

CZ-NV1

**3 way valve kit to fit inside the hydrokit. K and L Series.**

CZ-NV2

**3 way valve kit to fit inside the hydrokit. M Series.**

CZ-NV3



**3 way valve for DHW tanks.**

PAW-3WYVLV-HW



**1 antifreeze valve.**  
It is required to order 2 valves per system. For 9, 12 and 16 kW.

PAW-A2W-AFVLV-1

**1 antifreeze valve 1 1/2".**  
It is required to order 2 valves per system. For 20, 25 and 30 kW.

PAW-A2W-AFVLV-112



**Optional magnet for the water filter in H Series models.**

PAW-A2W-MGTFILTER

**Connectivity**



**Optional Wi-Fi or WLAN adapter for smart control via Panasonic Comfort Cloud and/or remote maintenance via Aquarea Service Cloud.**

CZ-TAW1C

**10 m extension cable for CZ-TAW1C.**

CZ-TAW1-CBL

**Aquarea Home Network Hub.**

PCZ-ESW737



**External meter gateway for K Series onwards.**

PAW-A2W-EXTMETER



**Modbus PCB for Big Aquarea T-CAP M Series (installed inside the WH-CME8L).**

CZ-NSMB



**Modbus interface for H Series onwards (Airzone).**

PAW-AZAW-MBS-M



**Modbus interface (Intesis). H and J Series.**

PAW-AW-MBS-H



**KNX interface for H Series onwards (Airzone).**

PAW-AZAW-KNX-1









**KNX interface for H Series onwards (Intesis).**

PAW-AW-KNX-H







Sensors for Aquarea H Series onwards

 <p><b>Outdoor ambient sensor.</b> ----- PAW-A2W-TSOD</p>	 <p><b>Zone room sensor.</b> ----- PAW-A2W-TSRT</p>	 <p><b>Zone water sensor.</b> ----- PAW-A2W-TSHC</p>
 <p><b>Solar sensor.</b> ----- PAW-A2W-TSSO</p>	 <p><b>Buffer tank sensor (for H and J Series, PAW-A2W-TSHC required if optional PCB is used.)</b> ----- PAW-A2W-TSBU</p>	 <p><b>In-line heater sensor for the control module M Series.</b> ----- PAW-A2W-TSBH</p>

tado° room control and smart energy management









tado° Room control sets with Heat Pump Optimizer X

 <p><b>Set of tado° Heat Pump Optimizer X and 1x Smart Radiator Thermostat X.</b> ----- KIT-TSRTXHPOXE</p>	 <p><b>Set of tado° Heat Pump Optimizer X and 4x tado° Smart Radiator Thermostat X.</b> ----- KIT-TSRTX4HP0XE</p>	 <p><b>Set of tado° Heat Pump Optimizer X and 1x Smart Thermostat X.</b> ----- KIT-TSTXHPOXE</p>	 <p><b>Set of tado° Heat Pump Optimizer X and 1x Smart Thermostat X and 2x Smart Radiator Thermostat X.</b> ----- KIT-TSTXSRTX2HP0XE</p>
--	---	---	--

tado° Room control sets with Bridge X







 <p><b>tado° Smart Radiator Thermostat X with Bridge X.</b> ----- PAW-TSRTXB</p>	 <p><b>tado° Smart Thermostat X with Bridge X.</b> ----- PAW-TSTXB</p>	 <p><b>Set of 1x Smart Thermostat X, 2x Smart Radiator Thermostat X and 1x Bridge X.</b> ----- PAW-TSTXSRTX2B</p>
---	---	--

tado° X devices



 <p><b>tado° Heat Pump Optimizer X (with Europlug).</b> ----- PAW-THPOXE</p>	 <p><b>tado° Smart Thermostat X.</b> ----- PAW-TSTX</p>	 <p><b>tado° Wireless Temperature Sensor X.</b> ----- PAW-TWTSX</p>	 <p><b>tado° Smart Radiator Thermostat X.</b> ----- PAW-TSRTX</p>	 <p><b>4x tado° Smart Radiator Thermostat X.</b> ----- PAW-TSRTX4</p>	 <p><b>tado° Bridge X.</b> ----- PAW-TBX</p>
---	--	--	---	--	---

Aquarea Air Smart fan coil floor standing accessories







Control accessories

 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>----- PCZ-EEB749</p>	 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>----- PCZ-EFB749</p>	 <p><b>Wall-mounted control PCB for Aquarea Air Smart fan coil floor standing.</b></p> <p>----- PCZ-ESE845</p>	 <p><b>On-board display with Modbus for Aquarea Air Smart fan coil floor standing.</b></p> <p>----- PCZ-ECA844</p>	 <p><b>On-board display with integrated Wi-Fi for Aquarea Air Smart fan coil floor standing.</b></p> <p>----- PCZ-EWA844</p>	 <p><b>PCB for analog control (0-10V) for Aquarea Air Smart fan coils Floor standing.</b></p> <p>----- PCZ-B10842</p>
---	---	---	--	---	--







Hydraulic accessories

 <p><b>Motorised 3 way valve for Aquarea Air floor standing.</b></p> <p>----- PCZ-V30720</p>	 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>----- PCZ-V20139</p>
---	---








Installation accessories

 <p><b>Condensate drip tray for horizontal installation of the Aquarea Air Smart fan coil floor standing 10.</b></p> <p>----- PCZ-GB0520</p>	 <p><b>Condensate drip tray for horizontal installation of the Aquarea Air Smart fan coil floor standing 20.</b></p> <p>----- PCZ-GB0521</p>	 <p><b>Condensate drip tray for horizontal installation of the Aquarea Air Smart fan coil floor standing 30.</b></p> <p>----- PCZ-GB0522</p>	 <p><b>Condensate drip tray for horizontal installation of the Aquarea Air Smart fan coil floor standing 35.</b></p> <p>----- PCZ-GB0523</p>	 <p><b>Set of 2 legs to protect water pipes for Aquarea Air floor standing.</b></p> <p>----- PCZ-LC0158</p>	 <p><b>Set of 2 legs to anchor the Aquarea Air floor standing to the floor.</b></p> <p>----- PCZ-LC0606</p>
<p><b>Condensate drip tray for horizontal installation of the Aquarea Air Smart fan coil floor standing 40.</b></p> <p>----- PCZ-GB0524</p>					

Aquarea Air Smart fan coil wall-mounted accessories

Control accessories		Hydraulic accessories			
 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>----- PCZ-EEB749</p>	 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>----- PCZ-EFB749</p>	 <p><b>Motorised 3 way valve for Aquarea Air wall-mounted 10, 15 and 20.</b></p> <p>----- PCZ-V30688</p>	 <p><b>Motorised 3 way valve for Aquarea Air wall-mounted 40.</b></p> <p>----- PCZ-V30718</p>	 <p><b>Motorised 2 way valve for Aquarea Air wall-mounted 10, 15 and 20.</b></p> <p>----- PCZ-V20687</p>	 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>----- PCZ-V20139</p>











Aquarea Air Smart fan coil ducted thin accessories

Control accessories			Hydraulic accessories		
 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EEB749</p>	 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EFB749</p>	 <p><b>Motorised 3 way valve for Aquarea Air ducted.</b></p> <p>-----</p> <p>PCZ-V30361</p>	 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>-----</p> <p>PCZ-V20139</p>		
Replacement filter kit	Delivery plates	Return plenum	90° shooting plenum	Telescopic kit	Grille for telescopic kit
 <p><b>Replacement recirculation filter kit. For P-FSN20 and P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0491</p>	 <p><b>Delivery plate with 2 circular inlets DN 160 mm. For P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0561</p>	 <p><b>Return plenum with 2 circular inlets DN 160 mm. For P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0566</p>	 <p><b>90° shooting plenum. For P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0576</p>	 <p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0581</p>	 <p><b>Grille for telescopic kit for rear intake. For P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0586</p>
<p><b>Replacement recirculation filter kit. For P-FSN25, P-FTN20, P-FSQ30 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0492</p>	<p><b>Delivery plate with 3 circular inlets DN 160 mm. For P-FTN20.</b></p> <p>-----</p> <p>PCZ-AHRD0562</p>	<p><b>Return plenum with 3 circular inlets DN 160 mm. For P-FTN20.</b></p> <p>-----</p> <p>PCZ-AHRD0567</p>	<p><b>90° shooting plenum. For P-FTN20 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0577</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FTN20.</b></p> <p>-----</p> <p>PCZ-AHRD0582</p>	<p><b>Grille for telescopic kit for rear intake. For P-FTN20.</b></p> <p>-----</p> <p>PCZ-AHRD0587</p>
<p><b>Replacement recirculation filter kit. For P-FSN35, P-FTN25, P-FSQ45 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0493</p>	<p><b>Delivery plate with 4 circular inlets DN 160 mm. For P-FTN25.</b></p> <p>-----</p> <p>PCZ-AHRD0563</p>	<p><b>Return plenum with 4 circular inlets DN 160 mm. For P-FTN25.</b></p> <p>-----</p> <p>PCZ-AHRD0568</p>	<p><b>90° shooting plenum. For P-FTN25 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0578</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FTN25.</b></p> <p>-----</p> <p>PCZ-AHRD0583</p>	<p><b>Grille for telescopic kit for rear intake. For P-FTN25.</b></p> <p>-----</p> <p>PCZ-AHRD0588</p>
<p><b>Replacement recirculation filter kit. For P-FSN45, P-FTN35, P-FSQ60 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0494</p>	<p><b>Delivery plate with 6 circular inlets DN 160 mm. For P-FTN35.</b></p> <p>-----</p> <p>PCZ-AHRD0564</p>	<p><b>Return plenum with 6 circular inlets DN 160 mm. For P-FTN35.</b></p> <p>-----</p> <p>PCZ-AHRD0569</p>	<p><b>90° shooting plenum. For P-FTN35 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0579</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FTN35.</b></p> <p>-----</p> <p>PCZ-AHRD0584</p>	<p><b>Grille for telescopic kit for rear intake. For P-FTN35.</b></p> <p>-----</p> <p>PCZ-AHRD0589</p>
<p><b>Replacement recirculation filter kit. For P-FSN55, P-FTN45, P-FSQ75 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0495</p>	<p><b>Delivery plate with 7 circular inlets DN 160 mm. For P-FTN45.</b></p> <p>-----</p> <p>PCZ-AHRD0565</p>	<p><b>Return plenum with 7 circular inlets DN 160 mm. For P-FTN45.</b></p> <p>-----</p> <p>PCZ-AHRD0570</p>	<p><b>90° shooting plenum. For P-FTN45 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0580</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FTN45.</b></p> <p>-----</p> <p>PCZ-AHRD0585</p>	<p><b>Grille for telescopic kit for rear intake. For P-FTN45.</b></p> <p>-----</p> <p>PCZ-AHRD0590</p>






Outdoor air kit	Ducting plate outdoor air kit	90° plenum for outdoor air kit with damper	Telescopic kit for outdoor air kit	Grille for telescopic kit for outdoor air kit
 <p>Plenum kit for external air connection with damper for room recirculation. For P-FTN15.</p> <p>-----</p> <p>PCZ-AHRD0571</p>	 <p>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN15.</p> <p>-----</p> <p>PCZ-AHRD0611</p>	 <p>90° plenum for outdoor air kit with damper. For P-FTN15.</p> <p>-----</p> <p>PCZ-AHRD0616</p>	 <p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN15.</p> <p>-----</p> <p>PCZ-AHRD0621</p>	 <p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN15.</p> <p>-----</p> <p>PCZ-AHRD0626</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FTN20 and P-FTQ30.</p> <p>-----</p> <p>PCZ-AHRD0572</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN20 and P-FTQ30.</p> <p>-----</p> <p>PCZ-AHRD0612</p>	<p>90° plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</p> <p>-----</p> <p>PCZ-AHRD0617</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</p> <p>-----</p> <p>PCZ-AHRD0622</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</p> <p>-----</p> <p>PCZ-AHRD0627</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FTN25 and P-FTQ45.</p> <p>-----</p> <p>PCZ-AHRD0573</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN25 and P-FTQ45.</p> <p>-----</p> <p>PCZ-AHRD0613</p>	<p>90° plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</p> <p>-----</p> <p>PCZ-AHRD0618</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</p> <p>-----</p> <p>PCZ-AHRD0623</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</p> <p>-----</p> <p>PCZ-AHRD0628</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FTN35 and P-FTQ60.</p> <p>-----</p> <p>PCZ-AHRD0574</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN35 and P-FTQ60.</p> <p>-----</p> <p>PCZ-AHRD0614</p>	<p>90° plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</p> <p>-----</p> <p>PCZ-AHRD0619</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</p> <p>-----</p> <p>PCZ-AHRD0624</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</p> <p>-----</p> <p>PCZ-AHRD0629</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FTN45 and P-FTQ65.</p> <p>-----</p> <p>PCZ-AHRD0575</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN45 and P-FTQ65.</p> <p>-----</p> <p>PCZ-AHRD0615</p>	<p>90° plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</p> <p>-----</p> <p>PCZ-AHRD0620</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</p> <p>-----</p> <p>PCZ-AHRD0625</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</p> <p>-----</p> <p>PCZ-AHRD0630</p>

Aquarea Air Smart fan coil ducted accessories









Control accessories			Hydraulic accessories				
 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EEB749</p>		 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EFB749</p>		 <p><b>Motorised 3 way valve for Aquarea Air ducted.</b></p> <p>-----</p> <p>PCZ-V30361</p>		 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>-----</p> <p>PCZ-V20139</p>	
Replacement filter kit	Delivery plates	Return plenum	90° shooting plenum	Telescopic kit	Grille for telescopic kit		
 <p><b>Replacement recirculation filter kit. For P-FSN20 and P-FTN15.</b></p> <p>-----</p> <p>PCZ-AHRD0491</p>	 <p><b>Delivery plate with 2 circular inlets DN 160 mm. For P-FSN20.</b></p> <p>-----</p> <p>PCZ-AHRD0431</p>	 <p><b>Return plenum with 2 circular inlets DN 160 mm. For P-FSN20.</b></p> <p>-----</p> <p>PCZ-AHRD0461</p>	 <p><b>90° shooting plenum. For P-FSN20.</b></p> <p>-----</p> <p>PCZ-AHRD0521</p>	 <p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FSN20.</b></p> <p>-----</p> <p>PCZ-AHRD0531</p>	 <p><b>Grille for telescopic kit for rear intake. For P-FSN20.</b></p> <p>-----</p> <p>PCZ-AHRD0541</p>		
<p><b>Replacement recirculation filter kit. For P-FSN25, P-FTN20, P-FSQ30 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0492</p>	<p><b>Delivery plate with 3 circular inlets DN 160 mm. For P-FSN25.</b></p> <p>-----</p> <p>PCZ-AHRD0432</p>	<p><b>Return plenum with 3 circular inlets DN 160 mm. For P-FSN25.</b></p> <p>-----</p> <p>PCZ-AHRD0462</p>	<p><b>90° shooting plenum. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0522</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FSN25.</b></p> <p>-----</p> <p>PCZ-AHRD0532</p>	<p><b>Grille for telescopic kit for rear intake. For P-FSN25.</b></p> <p>-----</p> <p>PCZ-AHRD0542</p>		
<p><b>Replacement recirculation filter kit. For P-FSN35, P-FTN25, P-FSQ45 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0493</p>	<p><b>Delivery plate with 4 circular inlets DN 160 mm. For P-FSN35.</b></p> <p>-----</p> <p>PCZ-AHRD0433</p>	<p><b>Return plenum with 4 circular inlets DN 160 mm. For P-FSN35.</b></p> <p>-----</p> <p>PCZ-AHRD0463</p>	<p><b>90° shooting plenum. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0523</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FSN35.</b></p> <p>-----</p> <p>PCZ-AHRD0533</p>	<p><b>Grille for telescopic kit for rear intake. For P-FSN35.</b></p> <p>-----</p> <p>PCZ-AHRD0543</p>		
<p><b>Replacement recirculation filter kit. For P-FSN45, P-FTN35, P-FSQ60 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0494</p>	<p><b>Delivery plate with 6 circular inlets DN 160 mm. For P-FSN45.</b></p> <p>-----</p> <p>PCZ-AHRD0434</p>	<p><b>Return plenum with 6 circular inlets DN 160 mm. For P-FSN45.</b></p> <p>-----</p> <p>PCZ-AHRD0464</p>	<p><b>90° shooting plenum. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0524</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FSN45.</b></p> <p>-----</p> <p>PCZ-AHRD0534</p>	<p><b>Grille for telescopic kit for rear intake. For P-FSN45.</b></p> <p>-----</p> <p>PCZ-AHRD0544</p>		
<p><b>Replacement recirculation filter kit. For P-FSN55, P-FTN45, P-FSQ75 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0495</p>	<p><b>Delivery plate with 7 circular inlets DN 160 mm. For P-FSN55.</b></p> <p>-----</p> <p>PCZ-AHRD0435</p>	<p><b>Return plenum with 7 circular inlets DN 160 mm. For P-FSN55.</b></p> <p>-----</p> <p>PCZ-AHRD0465</p>	<p><b>90° shooting plenum. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0525</p>	<p><b>Telescopic kit for rear or directly coupled suction. 153 mm - 270 mm. For P-FSN55.</b></p> <p>-----</p> <p>PCZ-AHRD0535</p>	<p><b>Grille for telescopic kit for rear intake. For P-FSN55.</b></p> <p>-----</p> <p>PCZ-AHRD0545</p>		









Outdoor air kit	Ducting plate outdoor air kit	90° plenum for outdoor air kit with damper	Telescopic kit for outdoor air kit	Grille for telescopic kit for outdoor air kit
 <p>Plenum kit for external air connection with damper for room recirculation. For P-FSN20.</p> <p>----- PCZ-AHRD0639</p>	 <p>Ducting plate plenum kit for outdoor air connection with damper. For P-FSN20.</p> <p>----- PCZ-AHRD0651</p>	 <p>90° plenum for outdoor air kit with damper. For P-FSN20.</p> <p>----- PCZ-AHRD0656</p>	 <p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN20.</p> <p>----- PCZ-AHRD0661</p>	 <p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN20.</p> <p>----- PCZ-AHRD0666</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FSN25 and P-FSQ30.</p> <p>----- PCZ-AHRD0640</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FSN25 and P-FSQ30.</p> <p>----- PCZ-AHRD0652</p>	<p>90° plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</p> <p>----- PCZ-AHRD0657</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</p> <p>----- PCZ-AHRD0662</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</p> <p>----- PCZ-AHRD0667</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FSN35 and P-FSQ45.</p> <p>----- PCZ-AHRD0641</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FSN35 and P-FSQ45.</p> <p>----- PCZ-AHRD0653</p>	<p>90° plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</p> <p>----- PCZ-AHRD0658</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</p> <p>----- PCZ-AHRD0663</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</p> <p>----- PCZ-AHRD0668</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FSN45 and P-FSQ60.</p> <p>----- PCZ-AHRD0642</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FSN45 and P-FSQ60.</p> <p>----- PCZ-AHRD0654</p>	<p>90° plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</p> <p>----- PCZ-AHRD0659</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</p> <p>----- PCZ-AHRD0664</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</p> <p>----- PCZ-AHRD0669</p>
<p>Plenum kit for external air connection with damper for room recirculation. For P-FSN55 and P-FSQ75.</p> <p>----- PCZ-AHRD0643</p>	<p>Ducting plate plenum kit for outdoor air connection with damper. For P-FSN55 and P-FSQ75.</p> <p>----- PCZ-AHRD0655</p>	<p>90° plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</p> <p>----- PCZ-AHRD0660</p>	<p>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</p> <p>----- PCZ-AHRD0665</p>	<p>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</p> <p>----- PCZ-AHRD0670</p>

## Aquarea Air Smart fan coil ducted multi zone thin accessories

Control accessories		Hydraulic accessories	
 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EEB749</p>	 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EFB749</p>	 <p><b>Motorised 3 way valve for Aquarea Air ducted.</b></p> <p>-----</p> <p>PCZ-V30361</p>	 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>-----</p> <p>PCZ-V20139</p>
Replacement filter kit	Return plenum	90° shooting plenum	Outdoor air kit
 <p><b>Replacement recirculation filter kit. For P-FSN25, P-FTN20, P-FSQ30 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0492</p> <p><b>Replacement recirculation filter kit. For P-FSN35, P-FTN25, P-FSQ45 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0493</p> <p><b>Replacement recirculation filter kit. For P-FSN45, P-FTN35, P-FSQ60 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0494</p> <p><b>Replacement recirculation filter kit. For P-FSN55, P-FTN45, P-FSQ75 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0495</p>	 <p><b>Return plenum with 2 circular inlets DN 160 mm. For P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0682</p> <p><b>Return plenum with 3 circular inlets DN 160 mm. For P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0683</p> <p><b>Return plenum with 4 circular inlets DN 160 mm. For P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0684</p> <p><b>Return plenum with 5 circular inlets DN 160 mm. For P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0685</p>	 <p><b>90° shooting plenum. For P-FTN20 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0577</p> <p><b>90° shooting plenum. For P-FTN25 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0578</p> <p><b>90° shooting plenum. For P-FTN35 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0579</p> <p><b>90° shooting plenum. For P-FTN45 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0580</p>	 <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FTN20 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0572</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FTN25 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0573</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FTN35 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0574</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FTN45 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0575</p>

Ducting plate outdoor air kit	90° plenum for outdoor air kit with damper	Telescopic kit for outdoor air kit	Grille for telescopic kit for outdoor air kit
 <p><b>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN20 and P-FTQ30.</b></p> <p>----- PCZ-AHRD0612</p>	 <p><b>90° plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</b></p> <p>----- PCZ-AHRD0617</p>	 <p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</b></p> <p>----- PCZ-AHRD0622</p>	 <p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN20 and P-FTQ30.</b></p> <p>----- PCZ-AHRD0627</p>
<p><b>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN25 and P-FTQ45.</b></p> <p>----- PCZ-AHRD0613</p>	<p><b>90° plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</b></p> <p>----- PCZ-AHRD0618</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</b></p> <p>----- PCZ-AHRD0623</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN25 and P-FTQ45.</b></p> <p>----- PCZ-AHRD0628</p>
<p><b>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN35 and P-FTQ60.</b></p> <p>----- PCZ-AHRD0614</p>	<p><b>90° plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</b></p> <p>----- PCZ-AHRD0619</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</b></p> <p>----- PCZ-AHRD0624</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN35 and P-FTQ60.</b></p> <p>----- PCZ-AHRD0629</p>
<p><b>Ducting plate plenum kit for outdoor air connection with damper. For P-FTN45 and P-FTQ65.</b></p> <p>----- PCZ-AHRD0615</p>	<p><b>90° plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</b></p> <p>----- PCZ-AHRD0620</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</b></p> <p>----- PCZ-AHRD0625</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FTN45 and P-FTQ65.</b></p> <p>----- PCZ-AHRD0630</p>









#### Non-return damper






#### Non-return damper for P-FTQ and P-FSQ.

-----  
PCZ-AHRD0519

Aquarea Air Smart fan coil ducted multi zone accessories

Control accessories		Hydraulic accessories	
 <p><b>Wall-mounted control with Modbus for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EEB749</p>	 <p><b>Wall-mounted control with Integrated Wi-Fi for Aquarea Air Smart fan coils.</b></p> <p>-----</p> <p>PCZ-EFB749</p>	 <p><b>Motorised 3 way valve for Aquarea Air ducted.</b></p> <p>-----</p> <p>PCZ-V30361</p>	 <p><b>Motorised 2 way valve for Aquarea Air floor standing, wall-mounted 40 and ducted.</b></p> <p>-----</p> <p>PCZ-V20139</p>
Replacement filter kit	Return plenum	90° shooting plenum	Outdoor air kit
 <p><b>Replacement recirculation filter kit. For P-FSN25, P-FTN20, P-FSQ30 and P-FTQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0492</p> <p><b>Replacement recirculation filter kit. For P-FSN35, P-FTN25, P-FSQ45 and P-FTQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0493</p> <p><b>Replacement recirculation filter kit. For P-FSN45, P-FTN35, P-FSQ60 and P-FTQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0494</p> <p><b>Replacement recirculation filter kit. For P-FSN55, P-FTN45, P-FSQ75 and P-FTQ65.</b></p> <p>-----</p> <p>PCZ-AHRD0495</p>	 <p><b>Return plenum with 2 circular inlets DN 160 mm. For P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0466</p> <p><b>Return plenum with 3 circular inlets DN 160 mm. For P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0467</p> <p><b>Return plenum with 4 circular inlets DN 160 mm. For P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0468</p> <p><b>Return plenum with 5 circular inlets DN 160 mm. For P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0469</p>	 <p><b>90° shooting plenum. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0522</p> <p><b>90° shooting plenum. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0523</p> <p><b>90° shooting plenum. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0524</p> <p><b>90° shooting plenum. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0525</p>	 <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0640</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0641</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0642</p> <p><b>Plenum kit for external air connection with damper for room recirculation. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0643</p>

90° plenum for outdoor air kit with damper	Telescopic kit for outdoor air kit	Grille for telescopic kit for outdoor air kit
 <p><b>90° plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0657</p>	 <p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0662</p>	 <p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN25 and P-FSQ30.</b></p> <p>-----</p> <p>PCZ-AHRD0667</p>
<p><b>90° plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0658</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0663</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN35 and P-FSQ45.</b></p> <p>-----</p> <p>PCZ-AHRD0668</p>
<p><b>90° plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0659</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0664</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN45 and P-FSQ60.</b></p> <p>-----</p> <p>PCZ-AHRD0669</p>
<p><b>90° plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0660</p>	<p><b>Telescopic kit. For plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0665</p>	<p><b>Grille for telescopic kit. For plenum for outdoor air kit with damper. For P-FSN55 and P-FSQ75.</b></p> <p>-----</p> <p>PCZ-AHRD0670</p>

**Non-return damper**











**Non-return damper for P-FTQ and P-FSQ.**

-----

PCZ-AHRD0519

**Fan coil units controllers**



 <p><b>Electro-mechanical controller (supplied loose).</b></p> <p>-----</p> <p>TRM-FA</p>	 <p><b>Electronic controller.</b></p> <p>-----</p> <p>Plogic</p>	 <p><b>Electronic controller.</b></p> <p>-----</p> <p>TControl EASY 3S</p>	 <p><b>Electronic controller.</b></p> <p>-----</p> <p>TControl POD glass</p>
 <p><b>Wired remote controller with touch control for 2-pipe and 4-pipe, EC fan coil (control + Modbus).</b></p> <p>-----</p> <p>PAW-FC-907EC</p> <p><b>Wired remote controller with touch control for 2-pipe, AC fan coil (control only).</b></p> <p>-----</p> <p>PAW-FC-907AC</p>	 <p><b>Wired remote controller for 2-pipe and 4-pipe, EC fan coil (control + Modbus).</b></p> <p>-----</p> <p>PAW-FC-903EC</p> <p><b>Wired remote controller for 2-pipe, AC fan coil (control only).</b></p> <p>-----</p> <p>PAW-FC-903AC</p>	 <p><b>Advanced wired remote controller for fan coil.</b></p> <p>-----</p> <p>PAW-FC-RC1</p>	 <p><b>Smart controller. Mini building management system.</b></p> <p>-----</p> <p>SRC</p>





**Plogic remote control.**

-----  
WRC / MRC



**Plogic remote control.**

-----  
BRC



**Plogic remote control.**

-----  
IRC

**Sanitary tank accessories**



**Tank sensor with 5 m cable length.**

-----  
PAW-TS1

**Tank sensor with 20 m cable length.**

-----  
PAW-TS2

**Tank sensor with 5 m cable length and only 6 mm diameter.**

-----  
PAW-TS4



**Temperature sensor kit for third party tank (with copper pocket and 20 m length sensor cable).**

-----  
CZ-TK1

**Impressed current anode for 200 L Stainless steel tanks.**

-----  
PAW-EANODE2



**Impressed current anode for 300 L Stainless steel tanks.**

-----  
PAW-EANODE3

**Heat recovery ventilation accessories**



**Supply and extract filters kit.**

-----  
PAW-VEN-FLTKit



**Optional PCB for additional functions.**

-----  
PAW-VEN-ACCPCB



**HRV touch control panel. White frame (cable must be ordered separately).**

-----  
PAW-VEN-DPL



**Cable with plug for electrical connection between unit and control panel, type CE and CD (12 m).**

-----  
PAW-VEN-CBLEXT12



**Twin plugs for installation of several control panels type CD or CE for one unit.**

-----  
PAW-VEN-DIVPLG



**HRV touch control panel wall-mounted kit.**

-----  
PAW-VEN-DPLBOX



**CO<sub>2</sub> RH wall-mounted sensor.**

-----  
PAW-VEN-S-CO2RH-W




**CO<sub>2</sub> wall-mounted sensor.**

-----  
PAW-VEN-S-CO2-W



**CO<sub>2</sub> duct sensor.**

-----  
PAW-VEN-S-CO2-D



**Wall bracket kit for stand-alone installation on the wall.**

-----  
PAW-VEN-WBRK



**Electrical duct heater 0,6 kW (includes relay).**




-----  
PAW-VEN-HTR06





**Electrical duct heater 1,2 kW (includes relay).**





-----  
PAW-VEN-HTR12

**Aquarea Vent accessories**

Remote controller (required, to be ordered separately)		Electrical duct heater	
			
<b>Wall-mounted control with Modbus for Aquarea Vent.</b>	<b>Wall-mounted control with Integrated Wi-Fi for Aquarea Vent.</b>	<b>Electrical duct heater 0,5 kW, DN 160 mm.</b>	<b>Electrical duct heater 1,0 kW, DN 160 mm.</b>
----- PCZ-AHRP0025	----- PCZ-AHRP0026	----- PCZ-AHRP0421	----- PCZ-AHRP0422

**Filters**





	
<b>Spare F7 filter kit (2 pcs) for models 15Z, 20Z, 30Z, 15H and 15V.</b>	<b>Activated carbon filter (1 pc) for models 15Z, 20Z, 30Z, 15H and 15V.</b>
----- PCZ-AHRP0501	----- PCZ-AHRP0901
<b>Spare F7 filter kit (2 pcs) for models 30H.</b>	<b>Activated carbon filter (1 pc) for models 30H.</b>
----- PCZ-AHRP0507	----- PCZ-AHRP0508
<b>Spare F7 filter kit (2 pcs) for models 30V.</b>	<b>Activated carbon filter (1 pc) for models 30V.</b>
----- PCZ-AHRP0502	----- PCZ-AHRP0902
<b>Spare F7 filter kit (2 pcs) for models 35H and 45H.</b>	<b>Activated carbon filter (1 pc) for models 35H and 45H.</b>
----- PCZ-AHRP0503	----- PCZ-AHRP0903
<b>Spare F7 filter kit (2 pcs) for models 40V and 45V.</b>	<b>Activated carbon filter (1 pc) for models 40V and 45V.</b>
----- PCZ-AHRP0504	----- PCZ-AHRP0904

Filters	External roof grill		
			
<b>External wall grid with flow deviation. Stainless steel, DN 160 mm.</b>	<b>Roof terminal. Stainless steel, DN 160 mm.</b>	<b>Through for flat roof terminal. Stainless steel, DN 160 mm.</b>	<b>Through insulation collar for roof terminal.</b>
----- PCZ-STE016181	----- PCZ-STE016185	----- PCZ-STE016190	----- PCZ-STE080189
		<b>Through for terminal inclined roof 45°. Stainless steel, DN 160 mm.</b>	
		----- PCZ-STE016191	

Primary pipe connections

 <p><b>Insulated joint male/male. DN 160 mm.</b></p> <p>-----</p> <p>PCZ-SRA116110</p>	 <p><b>Insulated sleeve female/female. DN 160 mm.</b></p> <p>-----</p> <p>PCZ-SRA116120</p>	 <p><b>Insulated reducer female/male. DN 160 mm to DN 125 mm.</b></p> <p>-----</p> <p>PCZ-SRA112132</p>	 <p><b>Insulated reducer female/male. DN 200 mm to DN 160 mm.</b></p> <p>-----</p> <p>PCZ-SRA116132</p>
---	--	--	--

Primary EPP connections

 <p><b>Rigid insulated pipe (primary EPP pipe). DN 160 mm, L= 1 mt, 1 joint included.</b></p> <p>-----</p> <p>PCZ-SCS116001</p>	 <p><b>Elbow 90° (primary EPP pipe). DN 160 mm, 1 joint included.</b></p> <p>-----</p> <p>PCZ-SCS116090</p>	 <p><b>Connection joint (primary EPP pipe). DN 160 mm.</b></p> <p>-----</p> <p>PCZ-SCS116160</p>	 <p><b>Reducer (primary EPP pipe). DN 160 mm to DN 125mm.</b></p> <p>-----</p> <p>PCZ-SCS116120</p>
--	--	---	--






Primary flexible pipe

Flexible pipe connections

Silencers

 <p><b>10 m primary flexible duct with insulated hose. DH 160 mm.</b></p> <p>-----</p> <p>PCZ-SCE116010</p>	 <p><b>10 m primary flexible duct with insulated aluphonic hose. DH 160 mm.</b></p> <p>-----</p> <p>PCZ-SCE316010</p>	 <p><b>Hose clamp for hose. 60/325 mm.</b></p> <p>-----</p> <p>PCZ-SCE099120</p>	 <p><b>Black air-tight anti-condensation tape. 50 mm x 10 m.</b></p> <p>-----</p> <p>PCZ-SCE199121</p>	 <p><b>Aluminium tape. 50 mm x 10 m. Sp 40 µm.</b></p> <p>-----</p> <p>PCZ-SCE199122</p>	 <p><b>Flexible silencer male/male. DN 160 mm, SP 25 mm, L= 1000 mm.</b></p> <p>-----</p> <p>PCZ-SCE216001</p>
---	---	--	--	--	--

Distribution manifolds and accessories

 <p><b>TG1 insulated steel manifold with inspection door and side/front/perpendicular exits. 1x DN 160 mm - 4+4+4x DN 75/90 mm.</b></p> <p>-----</p> <p>PCZ-SC0164044</p>	 <p><b>TG2 insulated steel manifold with inspection door and side/front/perpendicular exits. 1x DN 160 mm - 4+8+4x DN 75/90 mm.</b></p> <p>-----</p> <p>PCZ-SC0164084</p>	 <p><b>TG3 insulated steel manifold with inspection door and side/front/perpendicular exits. 1x DN 160 mm - 4+12+4x DN 75/90 mm.</b></p> <p>-----</p> <p>PCZ-SC0164124</p>
 <p><b>Manifold/ plenum coupling for DN 75 mm corrugated start.</b></p> <p>-----</p> <p>PCZ-SRS075140</p>	<p><b>Collector blind plug for manifold.</b></p> <p>-----</p> <p>PCZ-SRS080141</p>	 <p><b>Static flow regulator. 15=&gt; 50 m³/h, step minimum= 5 m³/h.</b></p> <p>-----</p> <p>PCZ-SRP080001</p>


## Corrugated pipe system with accessories

					
<b>50 m corrugated pipe coil. DN 75 mm.</b>	<b>O-Ring. DN 75 mm.</b>	<b>Corrugated pipe blind plug. DN 75 mm.</b>	<b>Joint male/male. DN 75 mm including two O-ring.</b>	<b>Fixing clip. DN 75 mm. Use every 1,5 - 2 m linear and before and after each curve.</b>	<b>90° vertical angle. DN 75 mm. Two O-rings included.</b>
PCZ-SRS075050	PCZ-SRS075145	PCZ-SRS075150	PCZ-SRS075120	PCZ-SRS075155	PCZ-SRS075160

## Room plenum

	<b>Replacement filter (10 pcs).</b>
<b>EPP polypropylene diffuser, modular and patented with 75/90 mm coupling, coupling for modular coupling, filter and installation brackets.</b>	
PCZ-REV081111	PCZ-SB0130860

## Room grills with round holes

			
<b>Grid 1x perforated round hole. Steel, white finish, 190 x 140 mm.</b>	<b>Grid 2x perforated round hole. Steel, white finish, 360 x 140 mm.</b>	<b>Grid 3x perforated round hole. Steel, white finish, 540 x 140 mm.</b>	<b>Grid 4x perforated round hole. Steel, white finish, 360 x 260 mm.</b>
PCZ-SB0130801	PCZ-SB0300801	PCZ-SB0480801	PCZ-SB0302001

## Room grills with square holes

			
<b>Grid 1x perforated square hole. Steel, white finish, 190 x 140 mm.</b>	<b>Grid 2x perforated square hole. Steel, white finish, 360 x 140 mm.</b>	<b>Grid 3x perforated square hole. Steel, white finish, 540 x 140 mm.</b>	<b>Grid 5x perforated square hole. Steel, white finish, 360 x 260 mm.</b>
PCZ-SB0130802	PCZ-SB0300802	PCZ-SB0480802	PCZ-SB0302002

# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

## Aquarea High Performance Hydraulic All in One L Series Single phase - R290

### WH-WDG05LE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	2,45	1,76	1,39	3,80	2,30	1,65	3,60	2,46	1,46	—	—	—	—	—	—
-20	4,70	2,19	2,15	4,50	2,37	1,90	4,25	2,57	1,65	—	—	—	—	—	—
-15	5,00	1,94	2,58	5,00	2,31	2,16	5,00	2,63	1,90	4,60	2,88	1,60	—	—	—
-7	5,00	1,66	3,01	5,00	1,94	2,58	5,00	2,36	2,12	5,00	2,62	1,91	4,30	2,87	1,50
2	5,00	1,42	3,52	5,00	1,71	2,92	5,00	2,14	2,34	5,00	2,54	1,97	4,60	2,76	1,67
7	5,00	0,99	5,05	5,00	1,27	3,94	5,00	1,63	3,07	5,00	2,03	2,46	4,70	2,57	1,83

### WH-WDG07LE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	4,75	2,53	1,88	4,30	2,66	1,62	3,95	2,78	1,42	—	—	—	—	—	—
-20	5,50	2,56	2,15	5,10	2,75	1,85	4,90	2,97	1,65	—	—	—	—	—	—
-15	6,00	2,50	2,40	5,50	2,60	2,12	5,20	2,89	1,80	4,80	3,00	1,60	—	—	—
-7	5,80	1,93	3,01	5,80	2,32	2,50	5,80	2,74	2,12	5,70	3,16	1,80	4,80	3,56	1,35
2	6,85	2,00	3,43	6,60	2,34	2,82	6,25	2,67	2,34	5,60	2,80	2,00	5,00	3,13	1,60
7	7,00	1,42	4,93	7,00	1,90	3,68	7,00	2,35	2,98	6,60	2,85	2,32	6,30	3,40	1,85

### WH-WDG09LE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	6,05	3,43	1,76	5,25	3,28	1,60	4,65	3,15	1,48	—	—	—	—	—	—
-20	7,00	3,56	1,97	6,20	3,50	1,77	5,60	3,43	1,63	—	—	—	—	—	—
-15	7,40	3,20	2,31	6,80	3,40	2,00	6,30	3,55	1,77	5,60	3,55	1,58	—	—	—
-7	7,00	2,50	2,80	7,00	2,98	2,35	7,00	3,29	2,13	6,50	3,53	1,84	5,40	3,56	1,52
2	7,00	2,05	3,41	7,00	2,50	2,80	7,00	2,90	2,41	6,70	3,35	2,00	5,70	3,40	1,68
7	9,00	1,98	4,55	9,00	2,58	3,49	8,90	2,94	3,03	8,90	3,56	2,50	7,30	3,56	2,05

## Aquarea High Performance Hydraulic All in One L Series Single phase - R290

### WH-WDG05LE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	6,00	1,01	5,94	7,50	1,05	7,14	6,00	0,67	8,96
25	5,70	1,20	4,75	7,00	1,20	5,83	5,70	0,78	7,31
35	5,00	1,55	3,23	6,30	1,44	4,38	5,00	1,00	5,00
43	4,50	1,60	2,81	5,60	1,64	3,41	4,50	1,12	4,02

### WH-WDG07LE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	7,00	1,36	5,15	8,50	1,39	6,12	8,00	1,04	7,69
25	7,00	1,65	4,24	8,00	1,57	5,10	7,50	1,18	6,36
35	7,00	2,31	3,03	8,00	2,26	3,54	7,00	1,48	4,73
43	6,00	2,50	2,40	7,00	2,60	2,69	5,70	1,70	3,35

### WH-WDG09LE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	9,00	2,00	4,50	11,00	2,12	5,19	11,00	1,80	6,11
25	9,00	2,50	3,60	11,00	2,60	4,23	10,00	1,85	5,41
35	8,20	2,91	2,82	10,00	3,10	3,23	9,00	2,15	4,19
43	6,40	2,67	2,40	7,40	2,70	2,74	8,20	2,50	3,28

Tamb: Ambient Temperature [°C]. LWC: Leaving Water Condenser Temperature [°C]. HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.



## Aquarea High Performance Mono-bloc J Series Single phase - MDC · R32

## WH-MDC05J3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	4,37	1,73	2,53	4,16	2,03	2,05	3,84	2,37	1,62	3,43	2,64	1,30	—	—	—
-15	5,13	1,78	2,88	5,00	2,17	2,30	4,75	2,51	1,89	3,70	2,45	1,51	—	—	—
-7	5,17	1,49	3,47	5,00	1,80	2,78	4,80	2,16	2,22	5,00	2,70	1,85	4,68	2,71	1,73
2	5,00	1,11	4,50	5,00	1,40	3,57	5,00	1,81	2,76	5,00	2,20	2,27	4,80	2,40	2,00
7	5,09	0,78	6,53	5,00	0,99	5,05	5,00	1,31	3,82	5,00	1,66	3,01	4,58	1,90	2,41
25	4,96	0,77	6,44	5,04	0,90	5,60	5,31	1,16	4,58	5,61	1,34	4,19	5,15	1,33	3,87

## WH-MDC07J3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	4,86	2,03	2,39	4,66	2,35	1,98	4,44	2,75	1,61	4,23	3,13	1,35	—	—	—
-15	5,80	2,11	2,75	5,60	2,40	2,33	5,30	2,84	1,87	5,00	3,32	1,51	—	—	—
-7	6,76	2,07	3,27	6,80	2,42	2,81	6,30	2,82	2,23	6,30	3,39	1,86	4,74	2,76	1,72
2	6,83	1,66	4,11	7,00	2,06	3,40	6,85	2,50	2,74	6,30	2,92	2,16	4,80	2,40	2,00
7	7,32	1,19	6,15	7,00	1,47	4,76	7,00	1,96	3,57	7,00	2,48	2,82	6,18	2,44	2,53
25	6,80	0,64	10,63	6,67	0,93	7,17	6,79	1,38	4,92	6,70	1,80	3,72	6,22	1,78	3,49

## WH-MDC09J3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	5,33	2,36	2,26	6,43	3,60	1,79	5,78	3,83	1,51	4,83	3,64	1,33	—	—	—
-15	7,76	3,20	2,43	7,60	3,41	2,23	7,00	3,71	1,89	5,60	3,80	1,47	—	—	—
-7	7,39	2,45	3,02	7,50	2,85	2,63	7,30	3,37	2,17	7,00	3,89	1,80	6,44	3,67	1,75
2	7,38	1,89	3,90	7,45	2,38	3,13	7,00	2,85	2,46	7,00	3,30	2,12	5,46	2,72	2,01
7	9,15	1,59	5,75	9,00	2,01	4,48	9,00	2,61	3,45	8,95	3,22	2,78	7,25	2,87	2,53
25	8,02	0,98	8,18	7,88	1,32	5,97	8,46	1,86	4,55	7,60	2,03	3,74	6,30	1,87	3,37

## Aquarea High Performance Mono-bloc J Series Single phase - MDC · R32

## WH-MDC05J3E5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	5,18	0,82	6,32	6,17	0,84	7,35	5,78	0,60	9,63
25	5,38	1,22	4,41	6,64	1,25	5,31	5,55	0,78	7,12
35	5,00	1,54	3,25	5,86	1,61	3,64	5,00	0,99	5,05
43	4,19	1,85	2,26	5,36	1,92	2,79	4,37	1,30	3,36

## WH-MDC07J3E5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	5,38	0,83	6,48	6,69	0,85	7,87	7,65	0,76	10,07
25	6,96	1,82	3,82	9,06	1,98	4,58	7,58	1,23	6,16
35	7,00	2,29	3,06	8,37	2,47	3,39	7,00	1,48	4,73
43	5,60	2,55	2,20	6,87	2,58	2,66	6,10	1,88	3,24

## WH-MDC09J3E5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	6,89	1,21	5,69	8,65	1,23	7,03	9,82	1,19	8,25
25	9,50	2,84	3,35	11,55	3,06	3,77	9,68	1,82	5,32
35	9,00	3,32	2,71	10,10	3,51	2,88	9,00	2,12	4,25
43	5,42	2,56	2,12	6,56	2,56	2,56	7,40	2,56	2,89

Tamb: Ambient Temperature [°C]. LWC: Leaving Water Condenser Temperature [°C]. HC: Heating Capacity [kW]. CC: Cooling Capacity [kW]. IP: Input Power [kW]. This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

## Aquarea T-CAP Hydraulic Bi-bloc M Series Single phase / Three phase - R290

### WH-WXG09ME8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	7,90	3,50	2,26	8,20	4,20	1,95	7,90	4,80	1,65	7,60	5,70	1,33	—	—	—	—	—	—
-20	7,90	2,94	2,69	8,20	3,34	2,46	7,90	3,99	1,98	7,60	4,76	1,60	7,10	5,30	1,34	—	—	—
-15	9,00	2,74	3,28	9,00	3,30	2,73	9,00	3,97	2,27	9,00	4,48	2,01	9,00	5,27	1,71	8,20	6,50	1,26
-7	9,00	2,26	3,98	9,00	2,61	3,45	9,00	3,35	2,69	9,00	3,83	2,35	9,00	4,68	1,92	9,00	5,90	1,53
2	8,80	1,95	4,51	9,00	2,36	3,81	9,00	2,91	3,09	9,00	3,54	2,54	9,00	4,29	2,10	9,00	5,50	1,64
7	9,00	1,24	7,26	9,00	1,72	5,23	9,00	2,30	3,91	9,00	2,78	3,24	9,00	3,46	2,60	8,90	4,98	1,79
25	7,20	0,86	8,37	9,00	1,08	8,33	9,00	1,55	5,81	9,00	2,05	4,39	9,00	2,68	3,36	8,40	3,45	2,43

### WH-WXG12ME8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	10,20	4,90	2,08	10,50	5,55	1,89	9,50	5,75	1,65	8,65	5,90	1,47	—	—	—	—	—	—
-20	11,00	4,25	2,59	11,20	4,75	2,36	10,00	5,00	2,00	10,00	5,70	1,75	9,10	5,80	1,57	—	—	—
-15	12,00	4,27	2,81	12,00	4,56	2,63	11,50	5,42	2,12	11,00	5,50	2,00	10,00	5,88	1,70	9,00	6,10	1,48
-7	11,50	3,68	3,13	12,00	4,00	3,00	12,00	5,02	2,39	12,00	5,53	2,17	11,00	6,01	1,83	10,00	6,20	1,61
2	11,50	2,92	3,94	12,00	3,39	3,54	12,00	4,20	2,86	12,00	4,95	2,42	12,00	5,94	2,02	10,50	6,20	1,69
7	12,00	1,93	6,22	12,00	2,37	5,06	12,00	3,13	3,83	12,00	3,71	3,23	12,00	4,62	2,60	12,00	6,10	1,97
25	9,80	1,10	8,91	12,00	1,40	8,57	12,00	2,00	6,00	12,00	2,60	4,62	12,00	3,26	3,68	12,00	3,92	3,06

### WH-WXG16ME8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	14,20	6,80	2,09	14,20	7,80	1,82	14,20	8,60	1,65	14,00	10,53	1,33	—	—	—	—	—	—
-20	14,20	5,40	2,63	14,20	6,10	2,33	14,20	6,90	2,06	14,20	8,10	1,75	14,20	10,16	1,40	—	—	—
-15	16,00	5,90	2,71	16,00	6,70	2,39	16,00	7,70	2,08	16,00	8,70	1,84	16,00	10,15	1,58	14,20	10,90	1,30
-7	16,00	5,40	2,96	16,00	6,32	2,53	16,00	7,10	2,25	16,00	8,12	1,97	16,00	9,40	1,70	16,00	10,30	1,55
2	16,00	3,63	4,41	16,00	4,85	3,30	16,00	5,88	2,72	16,00	6,75	2,37	16,00	8,15	1,96	16,00	9,99	1,60
7	16,00	2,70	5,93	16,00	3,27	4,89	16,00	4,19	3,82	16,00	5,00	3,20	16,00	6,30	2,54	16,00	7,60	2,11
25	16,00	1,45	11,03	16,00	1,99	8,04	16,00	2,85	5,61	16,00	3,65	4,38	16,00	4,75	3,37	16,00	6,30	2,54

## Aquarea T-CAP Hydraulic Bi-bloc M Series Single phase / Three phase - R290

### WH-WXG09ME8

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	9,80	2,00	4,90	11,00	2,04	5,39	10,80	1,38	7,83
25	9,30	2,28	4,08	10,50	2,35	4,47	10,20	1,49	6,85
35	9,00	2,49	3,61	9,80	2,63	3,73	9,00	1,71	5,26
43	8,40	2,80	3,00	9,00	2,88	3,13	8,60	2,00	4,30

### WH-WXG12ME8

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	12,00	2,50	4,80	13,70	2,60	5,27	12,00	1,73	6,94
25	12,00	3,05	3,93	13,50	3,12	4,33	12,00	1,88	6,38
35	12,00	4,21	2,85	13,20	3,25	4,06	12,00	2,80	4,29
43	9,60	4,35	2,21	10,00	4,35	2,30	12,00	3,60	3,33

### WH-WXG16ME8

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	15,50	3,00	5,17	15,80	2,75	5,75	16,00	2,50	6,40
25	15,00	3,75	4,00	15,50	3,40	4,56	16,00	3,10	5,16
35	14,50	5,05	2,87	14,50	4,50	3,22	15,50	3,95	3,92
43	12,00	5,15	2,33	12,00	5,20	2,31	15,00	5,35	2,80

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

**Big Aquarea T-CAP Hydraulic Stand-alone M Series Three phase - R290**

**WH-WXG20ME8**

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	20,00	9,15	2,19	20,00	11,23	1,78	20,00	13,32	1,50	—	—	—	—	—	—	—	—	—
-20	20,00	8,55	2,34	20,00	10,50	1,90	20,00	12,45	1,61	20,00	14,40	1,39	On request			—	—	—
-15	20,00	6,80	2,94	20,00	8,53	2,34	20,00	10,27	1,95	20,00	12,00	1,67	20,00	10,45	1,91	—	—	—
-7	20,00	6,83	2,93	20,00	8,05	2,48	20,00	9,28	2,16	20,00	10,50	1,90	20,00	10,60	1,89	—	—	—
2	20,00	3,99	5,01	20,00	5,90	3,39	20,00	7,81	2,56	20,00	9,61	2,08	20,00	11,00	1,82	—	—	—
7	20,00	2,50	8,00	20,00	4,17	4,80	20,00	5,84	3,42	20,00	6,28	3,18	20,00	9,16	2,18	—	—	—
25	20,00	2,33	8,58	20,00	2,60	7,69	20,00	2,87	6,97	20,00	3,14	6,37	20,00	4,03	4,96	20,00	7,67	2,61

**WH-WXG25ME8**

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	22,00	11,34	1,94	23,00	13,80	1,67	24,00	16,26	1,48	—	—	—	—	—	—	—	—	—
-20	23,00	10,60	2,17	25,00	12,90	1,94	25,00	15,20	1,64	25,00	17,50	1,43	On request			—	—	—
-15	25,00	9,80	2,55	25,00	11,80	2,12	25,00	13,80	1,81	25,00	15,80	1,58	24,00	13,25	1,81	—	—	—
-7	25,00	7,60	3,29	25,00	10,60	2,36	25,00	13,60	1,84	25,00	13,90	1,80	25,00	14,10	1,77	—	—	—
2	25,00	6,85	3,65	25,00	8,93	2,80	25,00	11,01	2,27	25,00	12,70	1,97	25,00	13,70	1,82	—	—	—
7	25,00	3,89	6,43	25,00	5,55	4,50	25,00	7,21	3,47	25,00	8,33	3,00	25,00	11,60	2,16	—	—	—
25	25,00	3,09	8,09	25,00	3,42	7,31	25,00	3,75	6,67	25,00	4,08	6,13	25,00	5,18	4,83	25,00	9,60	2,60

**WH-WXG30ME8**

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	65	65	65	75	75	75
-25	22,00	11,34	1,94	23,00	13,80	1,67	24,00	16,26	1,48	—	—	—	—	—	—	—	—	—
-20	23,00	10,60	2,17	25,00	12,90	1,94	25,00	15,20	1,64	25,00	17,50	1,43	On request			—	—	—
-15	27,00	13,43	2,01	30,00	15,50	1,94	30,00	17,57	1,71	30,00	19,64	1,53	25,00	14,61	1,71	—	—	—
-7	29,00	9,70	2,99	30,00	12,90	2,33	30,00	16,10	1,86	30,00	19,30	1,55	30,00	17,10	1,75	—	—	—
2	30,00	10,10	2,97	30,00	12,00	2,50	30,00	13,90	2,16	30,00	15,40	1,95	30,00	16,70	1,80	—	—	—
7	30,00	4,88	6,15	30,00	6,82	4,40	30,00	8,76	3,42	30,00	10,00	3,00	30,00	14,00	2,14	—	—	—
25	30,00	4,33	6,93	30,00	4,60	6,52	30,00	4,87	6,16	30,00	5,14	5,84	30,00	6,49	4,62	25,00	9,60	2,60

**Big Aquarea T-CAP Hydraulic Stand-alone M Series Three phase - R290**

**WH-WXG20ME8**

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	20,00	3,22	6,21	20,00	3,10	6,45	20,00	2,99	6,69
25	20,00	4,65	4,30	20,00	4,01	4,99	20,00	3,38	5,92
35	20,00	6,62	3,02	20,00	5,40	3,70	20,00	4,18	4,78
43	20,00	9,06	2,21	20,00	7,37	2,71	20,00	5,68	3,52

**WH-WXG25ME8**

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	25,00	4,56	5,48	25,00	4,32	5,79	25,00	4,09	6,11
25	25,00	6,35	3,94	25,00	5,45	4,59	25,00	4,57	5,47
35	25,00	8,74	2,86	25,00	7,17	3,49	25,00	5,59	4,47
43	21,80	9,44	2,31	23,40	8,63	2,71	25,00	7,54	3,32

**WH-WXG30ME8**

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	28,00	5,14	5,45	29,00	5,19	5,59	30,00	5,23	5,74
25	28,00	6,84	4,09	29,00	6,38	4,55	30,00	5,92	5,07
35	26,00	9,70	2,68	28,00	8,51	3,29	30,00	7,32	4,10
43	21,80	9,44	2,31	25,90	9,60	2,70	30,00	9,76	3,07

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance. \* Data to be confirmed.

# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

## Aquarea T-CAP Mono-bloc J Series Single phase / Three phase - MXC · R32

### WH-MXC09J3E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	9,00	3,44	2,62	9,00	3,95	2,28	9,00	4,65	1,94	7,90	5,58	1,42	—	—	—
-15	9,00	2,98	3,02	9,00	3,41	2,64	9,00	4,04	2,23	9,00	4,83	1,86	8,70	5,37	1,62
-7	10,50	2,72	3,86	9,00	2,92	3,08	9,00	3,54	2,54	9,00	4,24	2,12	9,00	4,62	1,95
2	10,80	2,14	5,05	9,00	2,36	3,81	9,00	2,91	3,09	9,00	3,55	2,54	9,00	4,05	2,22
7	9,00	1,38	6,52	9,00	1,77	5,08	9,00	2,37	3,80	9,00	2,92	3,08	9,00	3,29	2,74
25	9,00	0,77	11,69	9,00	1,00	9,00	10,00	1,67	5,99	10,00	2,28	4,39	11,00	2,86	3,85

### WH-MXC12J6E5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	12,00	5,02	2,39	12,00	5,80	2,07	11,00	5,95	1,85	10,00	6,50	1,54	—	—	—
-15	12,00	4,14	2,90	12,00	4,83	2,48	11,00	5,20	2,12	10,50	6,00	1,75	8,90	6,30	1,41
-7	13,50	4,30	3,14	12,00	4,25	2,82	12,00	5,02	2,39	12,00	6,00	2,00	11,00	6,30	1,75
2	14,50	3,23	4,49	12,00	3,40	3,53	12,00	4,20	2,86	12,00	4,95	2,42	12,00	5,77	2,08
7	12,00	2,00	6,00	12,00	2,50	4,80	12,00	3,24	3,70	12,00	3,94	3,05	12,00	4,52	2,65
25	12,00	1,20	10,00	12,00	1,49	8,05	12,00	2,10	5,71	12,00	2,75	4,36	12,00	3,11	3,86

### WH-MXC09J3E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	9,00	3,44	2,62	9,00	3,95	2,28	9,00	4,65	1,94	7,90	5,58	1,42	—	—	—
-15	9,00	2,98	3,02	9,00	3,41	2,64	9,00	4,04	2,23	9,00	4,83	1,86	8,70	5,37	1,62
-7	10,50	2,72	3,86	9,00	2,92	3,08	9,00	3,54	2,54	9,00	4,24	2,12	9,00	4,62	1,95
2	10,80	2,14	5,05	9,00	2,36	3,81	9,00	2,91	3,09	9,00	3,55	2,54	9,00	4,05	2,22
7	9,00	1,38	6,52	9,00	1,77	5,08	9,00	2,37	3,80	9,00	2,92	3,08	9,00	3,29	2,74
25	9,00	0,77	11,69	9,00	1,00	9,00	10,00	1,67	5,99	10,00	2,28	4,39	11,00	2,86	3,85

### WH-MXC12J9E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	12,00	5,02	2,39	12,00	5,80	2,07	10,50	5,75	1,83	9,20	5,80	1,59	—	—	—
-15	12,00	4,14	2,90	12,00	4,83	2,48	12,00	5,67	2,12	11,10	6,35	1,75	8,70	6,20	1,40
-7	13,50	4,30	3,14	12,00	4,25	2,82	12,00	5,02	2,39	12,00	6,00	2,00	11,00	6,30	1,75
2	14,50	3,23	4,49	12,00	3,40	3,53	12,00	4,20	2,86	12,00	4,95	2,42	12,00	5,77	2,08
7	12,00	2,00	6,00	12,00	2,50	4,80	12,00	3,24	3,70	12,00	3,94	3,05	12,00	4,52	2,65
25	12,00	1,20	10,00	12,00	1,49	8,05	12,00	2,10	5,71	12,00	2,75	4,36	12,00	3,11	3,86

### WH-MXC16J9E8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	16,00	7,40	2,16	16,00	8,40	1,90	16,00	10,00	1,60	14,00	10,30	1,36	—	—	—
-15	15,30	6,10	2,51	16,00	6,91	2,32	16,00	8,44	1,90	16,00	9,97	1,60	14,00	10,60	1,32
-7	19,00	6,60	2,88	16,00	6,70	2,39	16,00	7,85	2,04	16,00	9,33	1,71	15,00	9,70	1,55
2	20,60	5,35	3,85	16,00	5,16	3,10	16,00	6,40	2,50	16,00	7,72	2,07	16,00	9,20	1,74
7	16,00	2,80	5,71	16,00	3,54	4,52	16,00	4,55	3,52	16,00	5,60	2,86	15,60	6,50	2,40
25	16,00	1,55	10,32	16,00	2,30	6,96	16,00	3,20	5,00	16,00	4,00	4,00	15,50	4,50	3,44

## Aquarea T-CAP Mono-bloc J Series Single phase / Three phase - MXC · R32

Outdoor		WH-MXC09J3E5									WH-MXC12J6E5																	
Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER										
LWC	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18										
16	9,00	1,61	5,59	11,00	1,49	7,38	11,40	1,30	8,77	11,40	2,10	5,43	13,60	2,09	6,51	15,00	2,06	7,28										
25	9,00	2,00	4,50	12,60	2,38	5,29	10,50	1,54	6,82	12,00	2,87	4,18	15,70	3,60	4,36	14,00	2,56	5,47										
35	9,00	2,83	3,18	10,90	2,98	3,66	9,00	1,95	4,62	12,00	4,14	2,90	13,60	4,35	3,13	12,00	3,04	3,95										
43	7,20	3,26	2,21	8,70	3,23	2,69	7,30	2,43	3,00	10,30	4,89	2,11	11,80	4,98	2,37	10,40	3,72	2,80										
Outdoor		WH-MXC09J3E8									WH-MXC12J9E8									WH-MXC16J9E8								
Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER				
LWC	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18	
16	9,00	1,66	5,42	11,00	1,54	7,14	11,40	1,35	8,44	11,40	2,15	5,30	13,60	2,14	6,36	15,00	2,15	6,98	15,00	3,15	4,76	19,00	3,35	5,67	19,00	3,00	6,33	
25	9,00	2,06	4,37	12,60	2,45	5,14	10,50	1,60	6,56	12,00	2,93	4,10	15,70	3,68	4,27	14,00	2,66	5,26	15,00	4,00	3,75	18,00	4,00	4,50	18,00	3,50	5,14	
35	9,00	2,91	3,09	10,90	3,07	3,55	9,00	2,02	4,46	12,00	4,23	2,84	13,60	4,44	3,06	12,00	3,17	3,79	14,50	5,11	2,84	14,50	4,20	3,45	16,00	4,27	3,75	
43	7,20	3,36	2,14	8,70	3,33	2,61	7,30	2,53	2,89	10,30	5,00	2,06	11,80	5,09	2,32	10,40	3,87	2,69	9,50	4,40	2,16	11,50	4,40	2,61	12,50	4,30	2,91	

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

## Aquarea EcoFlex. Single phase · R32

## CU-2WZ71YBE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55
-15	4,85	2,15	2,26	4,75	2,28	2,08	4,65	2,44	1,91	4,50	3,20	1,41
-7	5,40	1,70	3,18	5,60	1,97	2,84	5,60	2,40	2,33	5,30	2,78	1,91
2	6,50	1,77	3,67	6,70	2,06	3,25	6,60	2,45	2,69	6,00	2,89	2,08
7	8,16	1,63	5,01	8,00	1,90	4,21	8,00	2,30	3,48	8,00	2,85	2,81
12	8,22	1,28	6,42	8,00	1,52	5,26	8,00	2,00	4,00	8,00	2,60	3,08

## Aquarea High Performance Bi-bloc K Series Single phase · R32

## WH-UDZ03KE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	2,50	1,11	2,25	2,52	1,31	1,92	2,24	1,59	1,41	2,12	1,80	1,18	—	—	—
-15	3,00	1,14	2,63	3,20	1,37	2,34	3,00	1,62	1,85	2,75	1,92	1,43	—	—	—
-7	2,99	0,91	3,29	3,30	1,18	2,80	3,25	1,47	2,21	3,20	1,79	1,79	3,00	1,88	1,60
2	2,92	0,69	4,23	3,20	0,88	3,64	3,20	1,13	2,83	3,20	1,46	2,19	3,15	1,67	1,89
7	3,09	0,49	6,31	3,20	0,60	5,33	3,20	0,84	3,81	3,20	1,14	2,81	2,95	1,22	2,42

## WH-UDZ05KE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	—	—	—	4,05	1,95	2,08	3,76	2,20	1,71	3,39	2,48	1,37	—	—	—
-15	—	—	—	5,00	2,11	2,37	4,75	2,49	1,91	4,30	2,61	1,65	—	—	—
-7	—	—	—	5,00	1,79	2,79	5,00	2,14	2,34	5,00	2,65	1,89	4,68	2,71	1,73
2	—	—	—	5,00	1,40	3,57	5,00	1,79	2,79	5,00	2,18	2,29	4,80	2,40	2,00
7	—	—	—	5,00	0,98	5,10	5,00	1,31	3,82	5,00	1,65	3,03	4,58	1,90	2,41

## WH-UDZ07KE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	—	—	—	4,45	2,12	2,10	4,23	2,48	1,71	3,90	2,85	1,37	—	—	—
-15	—	—	—	5,60	2,38	2,35	5,30	2,78	1,91	5,00	3,20	1,56	—	—	—
-7	—	—	—	5,75	1,95	2,95	5,65	2,30	2,46	5,35	2,70	1,98	4,98	2,90	1,72
2	—	—	—	6,85	2,00	3,43	6,75	2,40	2,81	6,25	2,80	2,23	6,18	2,91	2,12
7	—	—	—	7,00	1,44	4,86	7,00	1,92	3,65	7,00	2,40	2,92	6,86	2,73	2,51

## WH-UDZ09KE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	—	—	—	4,95	2,43	2,04	4,58	2,70	1,70	4,04	3,00	1,35	—	—	—
-15	—	—	—	7,40	3,20	2,31	6,45	3,28	1,97	5,40	3,42	1,58	—	—	—
-7	—	—	—	6,25	2,20	2,84	6,10	2,68	2,28	5,90	3,06	1,93	5,65	3,24	1,74
2	—	—	—	7,00	2,06	3,40	6,85	2,50	2,74	6,30	2,89	2,18	7,26	3,31	2,19
7	—	—	—	9,00	1,98	4,55	9,00	2,58	3,49	8,90	3,04	2,93	8,60	3,42	2,51

## WH-UDZ12KE5

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	25	25	25	35	35	35	45	45	45	55	55	55	60	60	60
-20	—	—	—	8,80	4,42	1,99	8,00	4,95	1,62	7,00	5,65	1,24	—	—	—
-15	—	—	—	9,10	3,70	2,46	8,20	4,00	2,05	7,20	4,21	1,71	—	—	—
-7	—	—	—	10,10	3,69	2,74	9,30	4,29	2,17	8,40	4,27	1,97	7,30	4,40	1,66
2	—	—	—	11,50	3,34	3,44	10,70	3,78	2,83	9,20	4,09	2,25	8,20	4,40	1,86
7	—	—	—	12,10	2,53	4,78	12,00	3,38	3,55	12,00	4,06	2,96	10,20	4,26	2,39

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.



# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

## Aquarea High Performance Bi-bloc K Series Single phase - R32

### WH-UDZ03KE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
16	3,56	0,57	6,25	4,32	0,55	7,85	3,47	0,41	8,46
25	3,29	0,73	4,51	4,06	0,72	5,64	3,27	0,52	6,29
35	3,20	0,91	3,52	3,56	0,93	3,83	3,20	0,68	4,71
43	2,68	1,06	2,53	3,34	1,09	3,06	2,79	0,82	3,40

### WH-UDZ05KE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
25	5,47	1,37	3,99	6,62	1,39	4,76	5,54	0,80	6,93
35	5,00	1,64	3,05	6,69	1,76	3,80	5,00	1,02	4,90
43	4,18	1,83	2,28	5,54	1,84	3,01	4,45	1,27	3,50

### WH-UDZ07KE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
25	6,32	1,72	3,67	8,16	1,93	4,23	6,63	1,12	5,92
35	6,70	2,21	3,03	8,19	2,42	3,38	6,70	1,42	4,72
43	5,72	2,62	2,18	7,47	2,80	2,67	6,15	1,78	3,46

### WH-UDZ09KE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
25	8,31	2,50	3,32	10,43	2,67	3,91	8,85	1,72	5,15
35	8,20	3,02	2,72	10,28	3,25	3,16	9,00	2,15	4,19
43	5,00	2,15	2,33	6,38	2,15	2,97	7,02	2,14	3,28

### WH-UDZ12KE5

Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER
LWC	7	7	7	14	14	14	18	18	18
25	10,20	3,62	2,82	12,00	3,70	3,24	10,80	2,53	4,27
35	10,70	4,00	2,68	10,70	4,54	2,36	10,70	2,73	3,92
43	6,10	3,55	1,72	7,20	3,56	2,02	8,00	3,55	2,25

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW).  
This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

**Aquarea T-CAP Bi-bloc K Series Single phase / Three phase · R32**

WH-UXZ09KE5												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	60	60	60
-20	8,80	4,79	1,84	8,80	5,30	1,66	8,55	5,90	1,45	—	—	—
-15	9,00	3,45	2,61	9,00	4,30	2,09	9,00	4,95	1,82	—	—	—
-7	9,00	3,00	3,00	9,00	3,82	2,36	9,00	4,28	2,10	9,00	4,72	1,91
2	9,00	2,44	3,69	9,00	3,05	2,95	9,00	3,90	2,31	9,00	4,05	2,22
7	9,00	1,79	5,03	9,00	2,42	3,72	9,00	2,93	3,07	9,00	3,43	2,62
25	7,95	1,20	6,63	9,00	1,56	5,77	11,30	3,13	3,61	11,00	2,86	3,85
WH-UXZ12KE5												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	60	60	60
-20	11,50	6,05	1,90	10,20	6,02	1,69	8,70	6,00	1,45	—	—	—
-15	12,00	4,90	2,45	11,00	5,38	2,04	10,50	6,20	1,69	—	—	—
-7	12,00	4,41	2,72	12,00	5,54	2,17	12,00	6,00	2,00	11,00	6,30	1,75
2	12,00	3,49	3,44	12,00	4,25	2,82	12,00	5,24	2,29	12,00	5,77	2,08
7	12,10	2,50	4,84	12,10	3,38	3,58	12,10	3,98	3,04	12,00	4,52	2,65
25	10,90	1,61	6,77	10,87	2,44	4,45	11,30	3,13	3,61	12,00	3,11	3,86
WH-UXZ09KE8												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	60	60	60
-20	8,80	4,79	1,84	8,80	5,30	1,66	8,55	5,90	1,45	—	—	—
-15	9,00	3,45	2,61	9,00	4,30	2,09	9,00	4,95	1,82	—	—	—
-7	9,00	3,00	3,00	9,00	3,82	2,36	9,00	4,28	2,10	9,00	4,72	1,91
2	9,00	2,44	3,69	9,00	3,05	2,95	9,00	3,90	2,31	9,00	4,05	2,22
7	9,00	1,79	5,03	9,00	2,42	3,72	9,00	2,93	3,07	9,00	3,43	2,62
25	7,95	1,20	6,63	9,00	1,56	5,77	11,30	3,13	3,61	11,00	2,86	3,85
WH-UXZ12KE8												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	60	60	60
-20	11,50	6,05	1,90	10,20	6,02	1,69	8,70	6,00	1,45	—	—	—
-15	12,00	4,90	2,45	11,00	5,38	2,04	10,50	6,20	1,69	—	—	—
-7	12,00	4,41	2,72	12,00	5,54	2,17	12,00	5,24	2,29	11,80	6,59	1,79
2	12,00	3,49	3,44	12,00	4,25	2,82	12,00	5,24	2,29	12,00	5,77	2,08
7	12,10	2,50	4,84	12,10	3,38	3,58	12,10	3,98	3,04	12,00	4,52	2,65
25	10,90	1,61	6,77	10,87	2,44	4,45	11,30	3,13	3,61	12,00	3,11	3,86
WH-UXZ16KE8												
Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	35	35	35	45	45	45	55	55	55	60	60	60
-20	16,00	8,20	1,95	15,00	9,00	1,67	12,00	9,30	1,29	—	—	—
-15	16,00	6,91	2,32	16,00	8,44	1,90	16,00	9,97	1,60	—	—	—
-7	16,00	6,70	2,39	16,00	7,85	2,04	16,00	9,33	1,71	15,00	9,70	1,55
2	16,00	5,16	3,10	16,00	6,40	2,50	16,00	7,72	2,07	16,00	9,20	1,74
7	16,00	3,65	4,38	16,00	4,72	3,39	16,00	5,88	2,72	15,20	5,90	2,58
25	16,00	2,30	6,96	16,00	3,20	5,00	16,00	4,00	4,00	14,50	4,30	3,37

**Aquarea T-CAP Bi-bloc K Series Single phase / Three phase · R32**

Outdoor	WH-UXZ09KE5									WH-UXZ12KE5																	
	Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER								
LWC	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18	7	7	7						
25	8,98	2,37	3,79	10,60	2,41	4,40	9,00	1,57	5,73	11,10	3,35	3,31	13,03	3,43	3,80	11,63	2,34	4,97	15,00	4,00	3,75						
35	8,80	2,83	3,11	9,07	3,01	3,01	8,80	1,90	4,63	10,70	4,00	2,68	11,42	4,20	2,72	10,70	2,73	3,92	13,40	5,08	2,64						
43	6,48	3,27	1,98	7,65	3,27	2,34	6,68	2,46	2,72	6,62	3,29	2,01	7,89	3,30	2,39	8,68	3,28	2,65	8,80	4,20	2,10						
Outdoor	WH-UXZ09KE8									WH-UXZ12KE8									WH-UXZ16KE8								
	Tamb	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER	CC	IP	EER		
LWC	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18	7	7	7	14	14	14	18	18	18
25	8,98	2,37	3,79	10,60	2,41	4,40	9,00	1,57	5,73	11,10	3,35	3,31	13,03	3,43	3,80	11,63	2,34	4,97	15,00	4,00	3,75	17,00	4,20	4,05	17,00	3,40	5,00
35	8,80	2,83	3,11	9,07	3,01	3,01	8,80	1,90	4,63	10,70	4,00	2,68	11,42	4,20	2,72	10,70	2,73	3,92	13,40	5,08	2,64	15,50	5,30	2,92	13,40	5,08	2,64
43	6,48	3,27	1,98	7,65	3,27	2,34	6,68	2,46	2,72	6,62	3,29	2,01	7,89	3,30	2,39	8,68	3,28	2,65	8,80	4,20	2,10	10,50	4,30	2,44	11,50	4,20	2,74

Tamb: Ambient Temperature (°C). LWC: Leaving Water Condenser Temperature (°C). HC: Heating Capacity (kW). CC: Cooling Capacity (kW). IP: Input Power (kW). This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

# Heating and cooling capacity tables

Based on outlet temperature and outside temperature.

## Aquarea T-CAP Bi-bloc H Series Three phase. Super Quiet outdoor unit - SQC - R410A

### WH-UQ09HE8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	9,00	3,24	2,78	9,00	3,51	2,56	9,00	3,91	2,30	9,00	4,30	2,09	9,00	4,73	1,90	9,00	5,16	1,74
-7	9,00	2,71	3,32	9,00	3,16	2,85	9,00	3,62	2,49	9,00	4,07	2,21	9,00	4,27	2,11	9,00	4,46	2,02
2	9,00	2,36	3,81	9,00	2,51	3,59	9,00	2,78	3,24	9,00	3,05	2,95	9,00	3,56	2,53	9,00	4,07	2,21
7	9,00	1,64	5,49	9,00	1,86	4,84	9,00	2,16	4,17	9,00	2,46	3,66	9,00	2,76	3,26	9,00	3,06	2,94
25	13,60	1,50	9,07	13,60	1,71	7,95	13,20	1,93	6,84	12,80	2,14	5,98	12,00	2,41	4,98	11,20	2,67	4,19

### WH-UQ12HE8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	12,00	4,75	2,53	12,00	4,96	2,42	12,00	5,41	2,22	12,00	5,86	2,05	11,80	6,24	1,89	11,60	6,62	1,75
-7	12,00	3,85	3,12	12,00	4,41	2,72	12,00	4,98	2,41	12,00	5,54	2,17	12,00	5,90	2,03	12,00	6,26	1,92
2	12,00	3,19	3,76	12,00	3,49	3,44	12,00	3,87	3,10	12,00	4,25	2,82	12,00	4,86	2,47	12,00	5,47	2,19
7	12,00	2,18	5,50	12,00	2,53	4,74	12,00	2,96	4,05	12,00	3,39	3,54	12,00	3,78	3,17	12,00	4,16	2,88
25	13,60	1,55	8,77	13,60	1,76	7,73	13,40	2,10	6,38	13,20	2,43	5,43	12,60	2,66	4,74	12,00	2,89	4,15

### WH-UQ16HE8

Tamb	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP	HC	IP	COP
LWC	30	30	30	35	35	35	40	40	40	45	45	45	50	50	50	55	55	55
-15	16,00	6,30	2,54	16,00	6,89	2,32	16,00	7,45	2,15	16,00	8,10	1,98	16,00	8,48	1,89	15,20	8,96	1,70
-7	16,00	5,85	2,74	16,00	6,42	2,49	16,00	7,00	2,29	16,00	7,57	2,11	16,00	8,10	1,98	16,00	8,62	1,86
2	16,00	4,67	3,43	16,00	5,21	3,07	16,00	5,74	2,79	16,00	6,31	2,54	16,00	6,90	2,32	16,00	7,50	2,13
7	16,00	3,35	4,78	16,00	3,74	4,28	16,00	4,30	3,72	16,00	4,80	3,33	16,00	5,43	2,95	16,00	5,91	2,71
16	16,00	2,59	6,18	16,00	3,18	5,03	16,00	3,71	4,31	16,00	4,27	3,75	16,00	4,86	3,29	16,00	5,22	3,07
25	16,00	2,02	7,92	16,00	2,58	6,20	16,00	2,91	5,50	16,00	3,36	4,76	16,00	3,74	4,28	16,00	4,00	4,00

## Aquarea T-CAP Bi-bloc H Series Three phase. Super Quiet outdoor unit - SQC - R410A

### WH-UQ09HE8

Tamb	CC	IP	EER	CC	IP	EER
LWC	7	7	7	18	18	18
18	7,00	1,36	5,15	—	—	—
25	7,65	1,91	4,01	—	—	—
35	7,00	2,21	3,17	—	—	—
43	6,25	2,66	2,35	—	—	—

### WH-UQ12HE8

Tamb	CC	IP	EER	CC	IP	EER
LWC	7	7	7	18	18	18
18	7,50	1,41	5,32	—	—	—
25	8,90	2,16	4,12	—	—	—
35	10,00	3,56	2,81	—	—	—
43	8,00	3,01	2,66	—	—	—


### WH-UQ16HE8

Tamb	CC	IP	EER	CC	IP	EER
LWC	7	7	7	18	18	18
18	8,50	1,70	5,00	10,00	1,70	5,88
25	14,00	4,00	3,50	14,00	2,94	4,76
35	12,20	4,76	2,56	12,20	3,50	3,49
43	7,10	3,31	2,15	9,80	3,31	2,96


Tamb: Ambient Temperature [°C]. LWC: Leaving Water Condenser Temperature [°C]. HC: Heating Capacity [kW]. CC: Cooling Capacity [kW]. IP: Input Power [kW]. This data is measured by Panasonic in accordance with EN 14511-2 standard. This data is for reference purpose only, and does not guarantee the performance.

# Examples of installations


**Aquarea H and J Series:  
Bivalent with buffer tank and mixing valve**

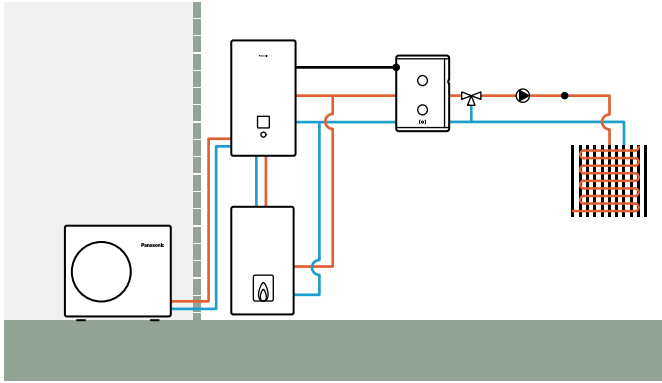


**Aquarea H and J Series:  
Buffer tank with solar and mixing valve**

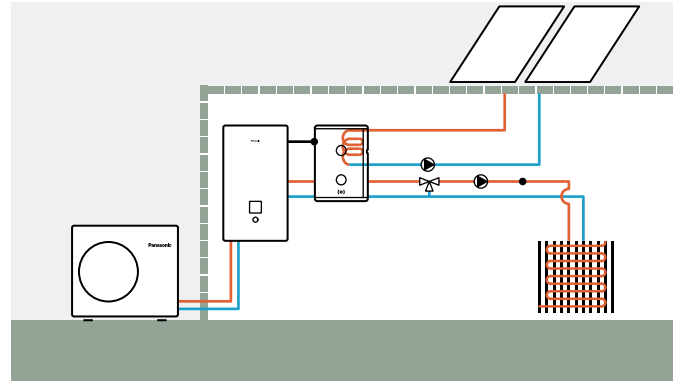


**Aquarea H and J Series:  
2 zones with external kit without buffer tank**

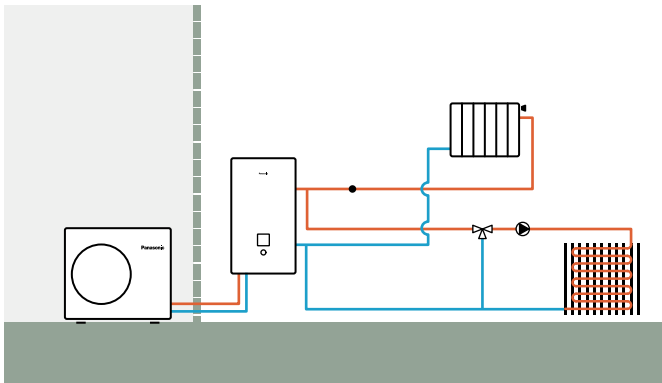

**Aquarea H and J Series:  
2 zones with external kit, buffer tank and swimming pool**

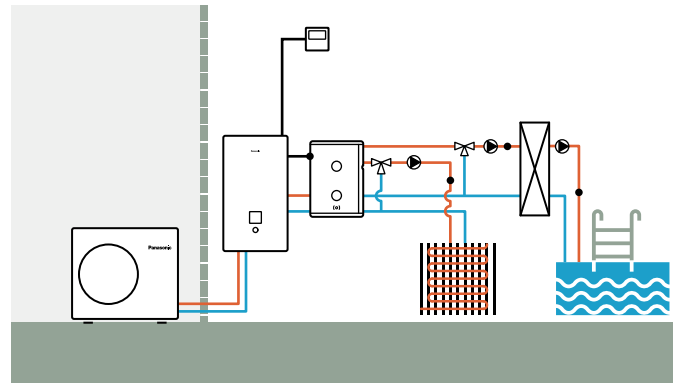

**Aquarea All in One H and J Series:  
2 zones with external kit, without buffer tank**

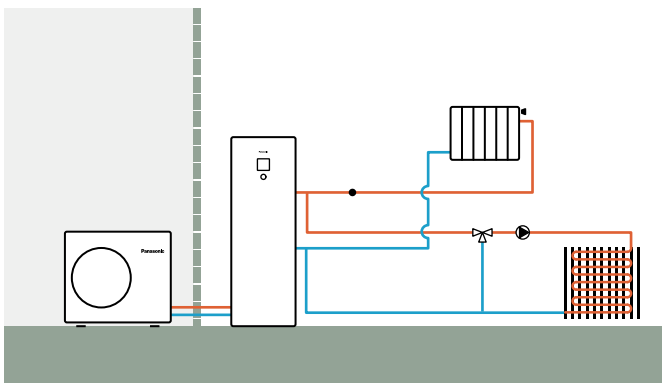

**Aquarea All in One 2 zones H and J Series:  
2 zones built-in, without buffer tank**

